


**General RCP Demolition Notes**

- Where ceiling transitions from new ceiling to existing ceiling, coordinate with Architect detail.
- Remove all existing ceiling grid & tile unless noted otherwise, as well as any wall fasteners and/or mastics attached therein where shown to be replaced by new materials.
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.
- No work in rooms with ceiling open to the structure above, unless noted otherwise.

**Ceiling Legend**

- Moisture Resistant Acoustical Lay In Ceiling
- Colored Acoustical Lay In Ceiling
- Vinyl Faced Acoustical Lay In Ceiling
- Gypsum Board Ceiling
- 2x2 Acoustical Lay In Ceiling
- Plaster/Stucco
- Concealed Fastener Painted Metal Soffit
- 2x2 Fluorescent Fixture
- Surface-Mounted Fluorescent Light Fixture
- Recessed Can Light Fixture
- HVAC Supply Grille
- HVAC Return Grille
- Exterior Wall Light
- Interior Wall Light
- Open to Structure (OTS)

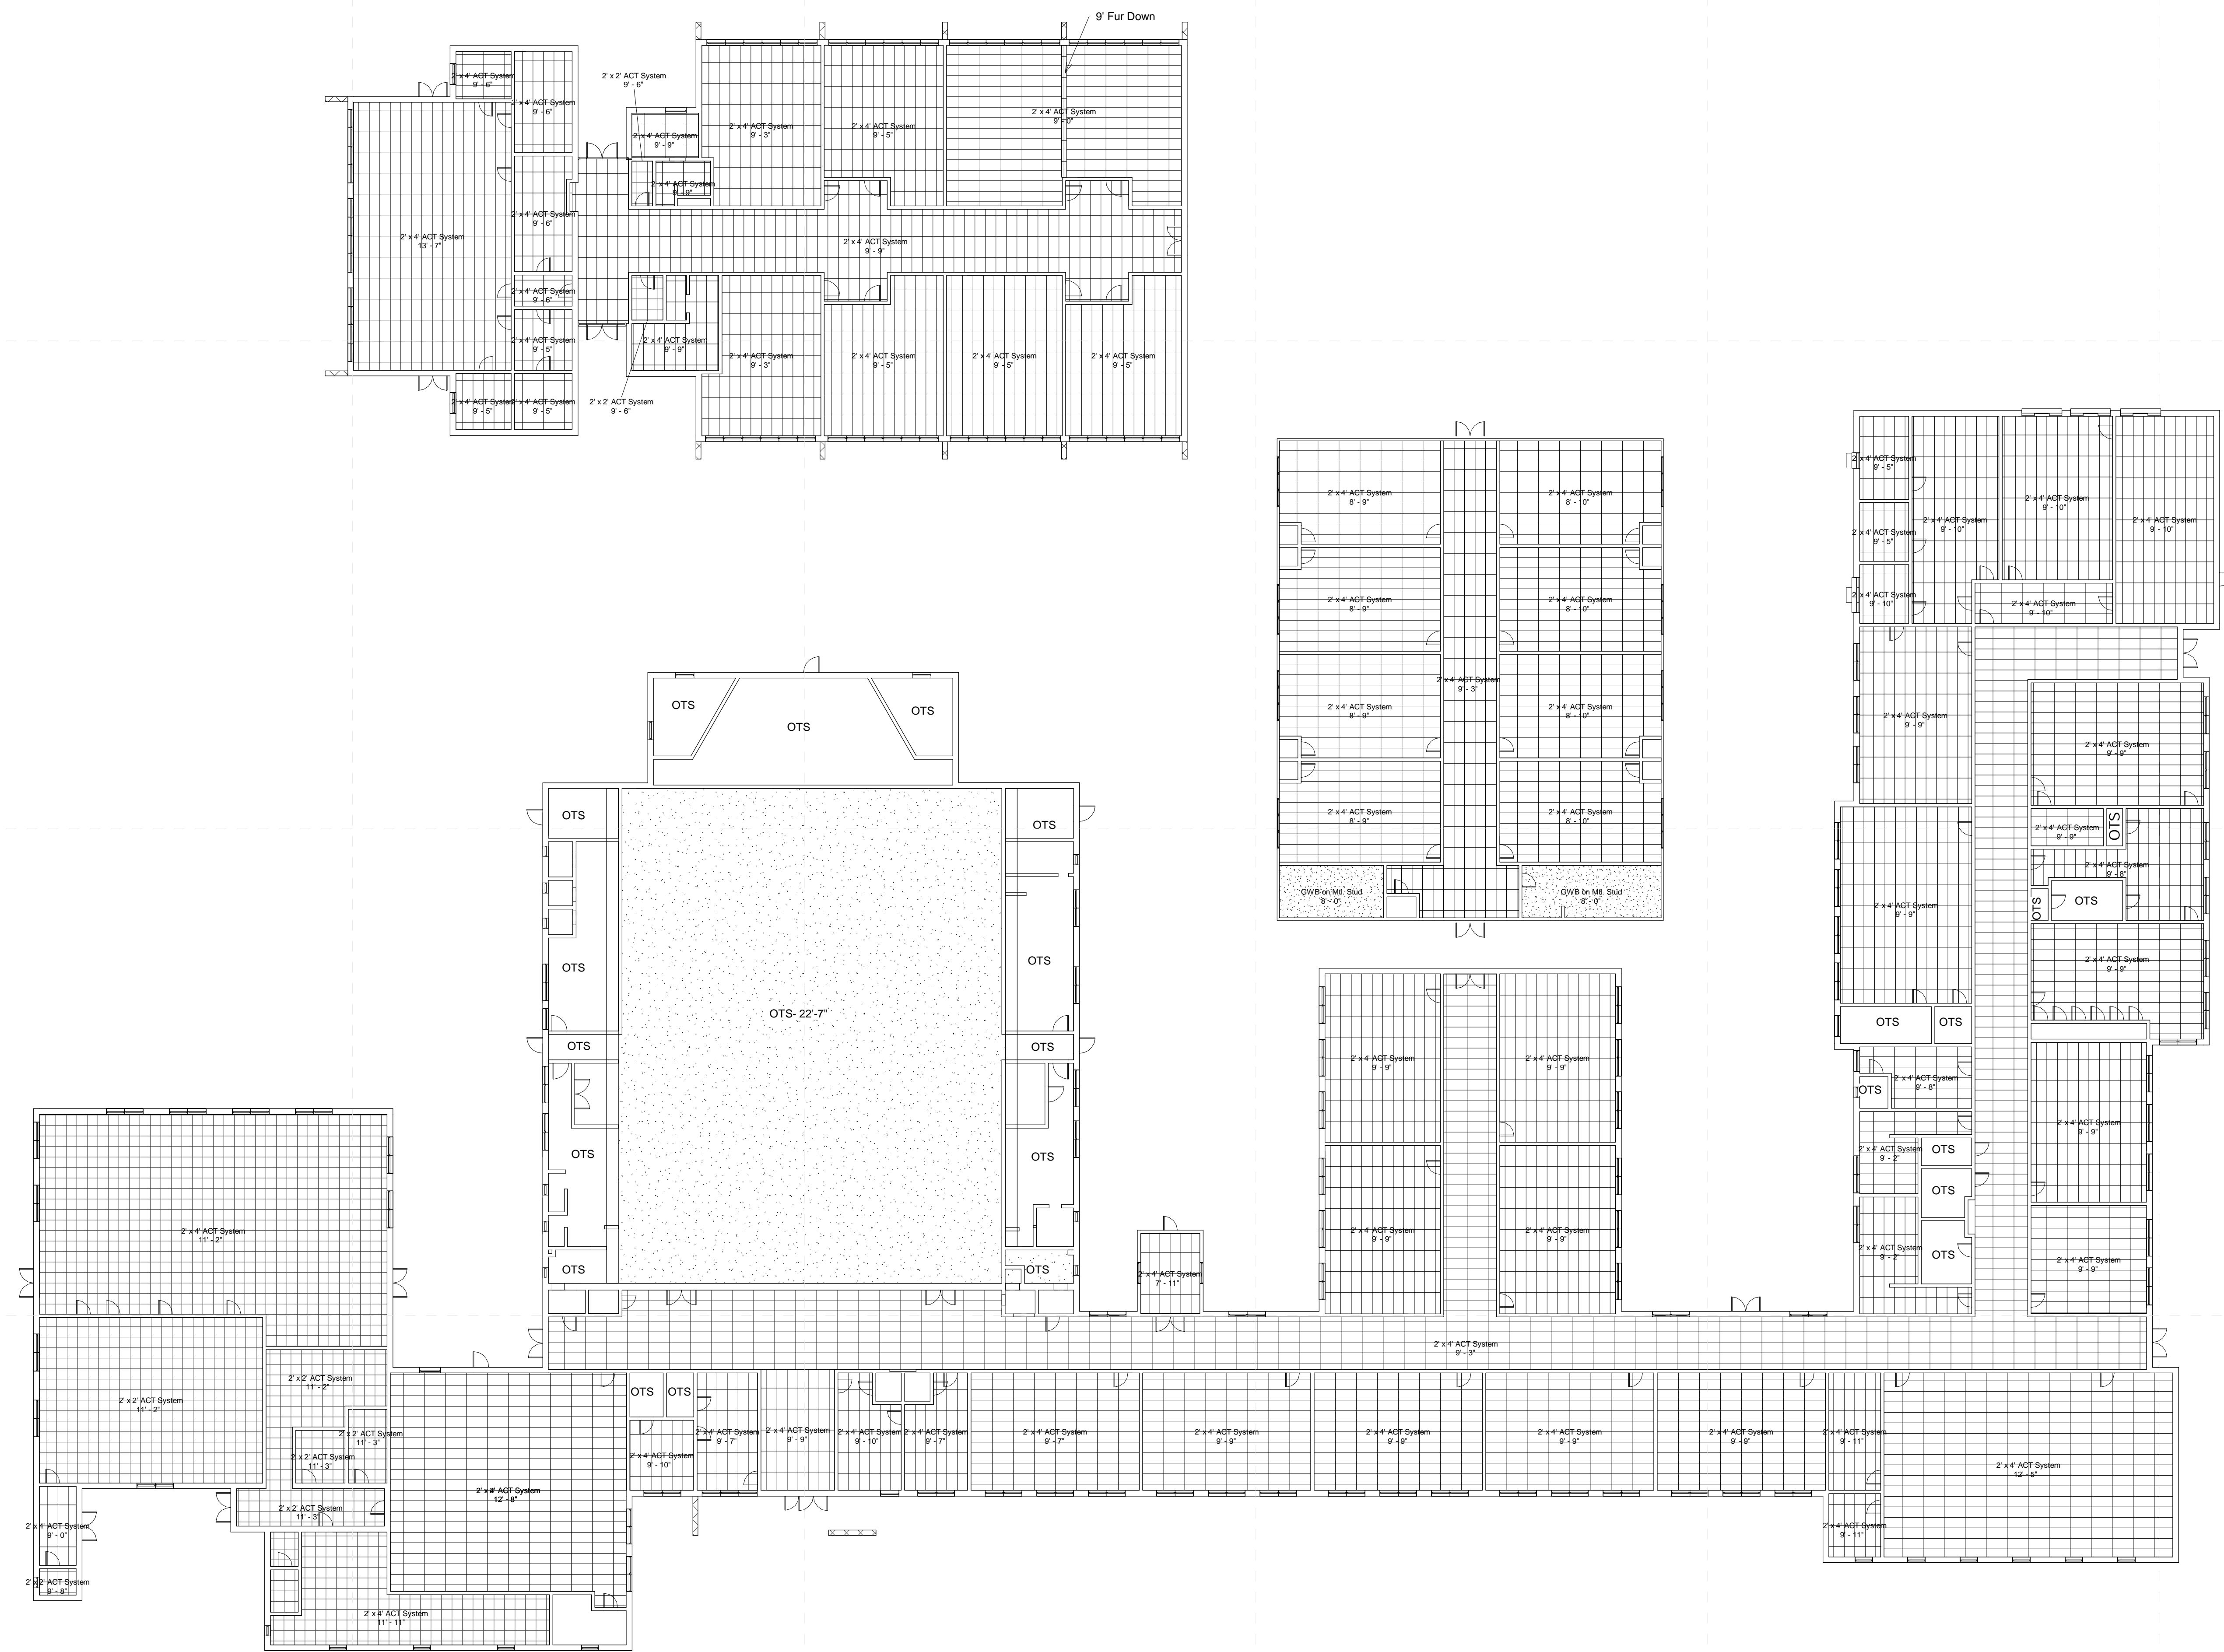

**1 RCP - Demolition**  
1/16" = 1'-0"

10/5/2021 11:27:14 AM D:\my stu\BUSINESS\work\2019 dale\Partners\21027 - Sunflower County\_model\21081 Thomas Edwards.rvt





Not For Construction

Thomas Edwards High School  
360 L F Packer Dr, Ruleville, MS 38771

Schematic Design

Project No 00000  
Date Issue Date  
Revisions Rev Date

A141

Composite RCP

General RCP Notes

- All ceiling heights shall be same as existing or lower, unless noted otherwise.
- Contractor shall paint all surfaces above 6'-8" at wall, roof, and ceiling, as well as anything attached therein at all rooms labeled OTS, unless noted otherwise
- Repair/replace any and all ceiling damaged due to construction activities.
- Bent ceiling grid damaged due to construction activities shall be replaced or bent to appear as new in shape.

Specific Notes

09 01 20 001 Finish drywall to level 4, prime, & paint


Ceiling Legend

- Moisture Resistant Acoustical Lay In Ceiling
- Colored Acoustical Lay In Ceiling
- Vinyl Faced Acoustical Lay In Ceiling
- Gypsum Board Ceiling
- 2x2 Acoustical Lay In Ceiling
- Plaster/Stucco
- Concealed Fastener Painted Metal Soffit
- 2x2 Fluorescent Fixture
- Surface-Mounted Fluorescent Light Fixture
- Recessed Can Light Fixture
- HVAC Supply Grille
- HVAC Return Grille
- Exterior Wall Light
- Interior Wall Light
- Open to Structure (OTS)


1 Main Floor - New Construction  
1/16" = 1'-0"




10/5/2021 11:27:16 AM D:\my stu\FBUSINESS\work\2019 dale\Partners\21027- Sunflower County\_model\21081 Thomas Edwards.rvt

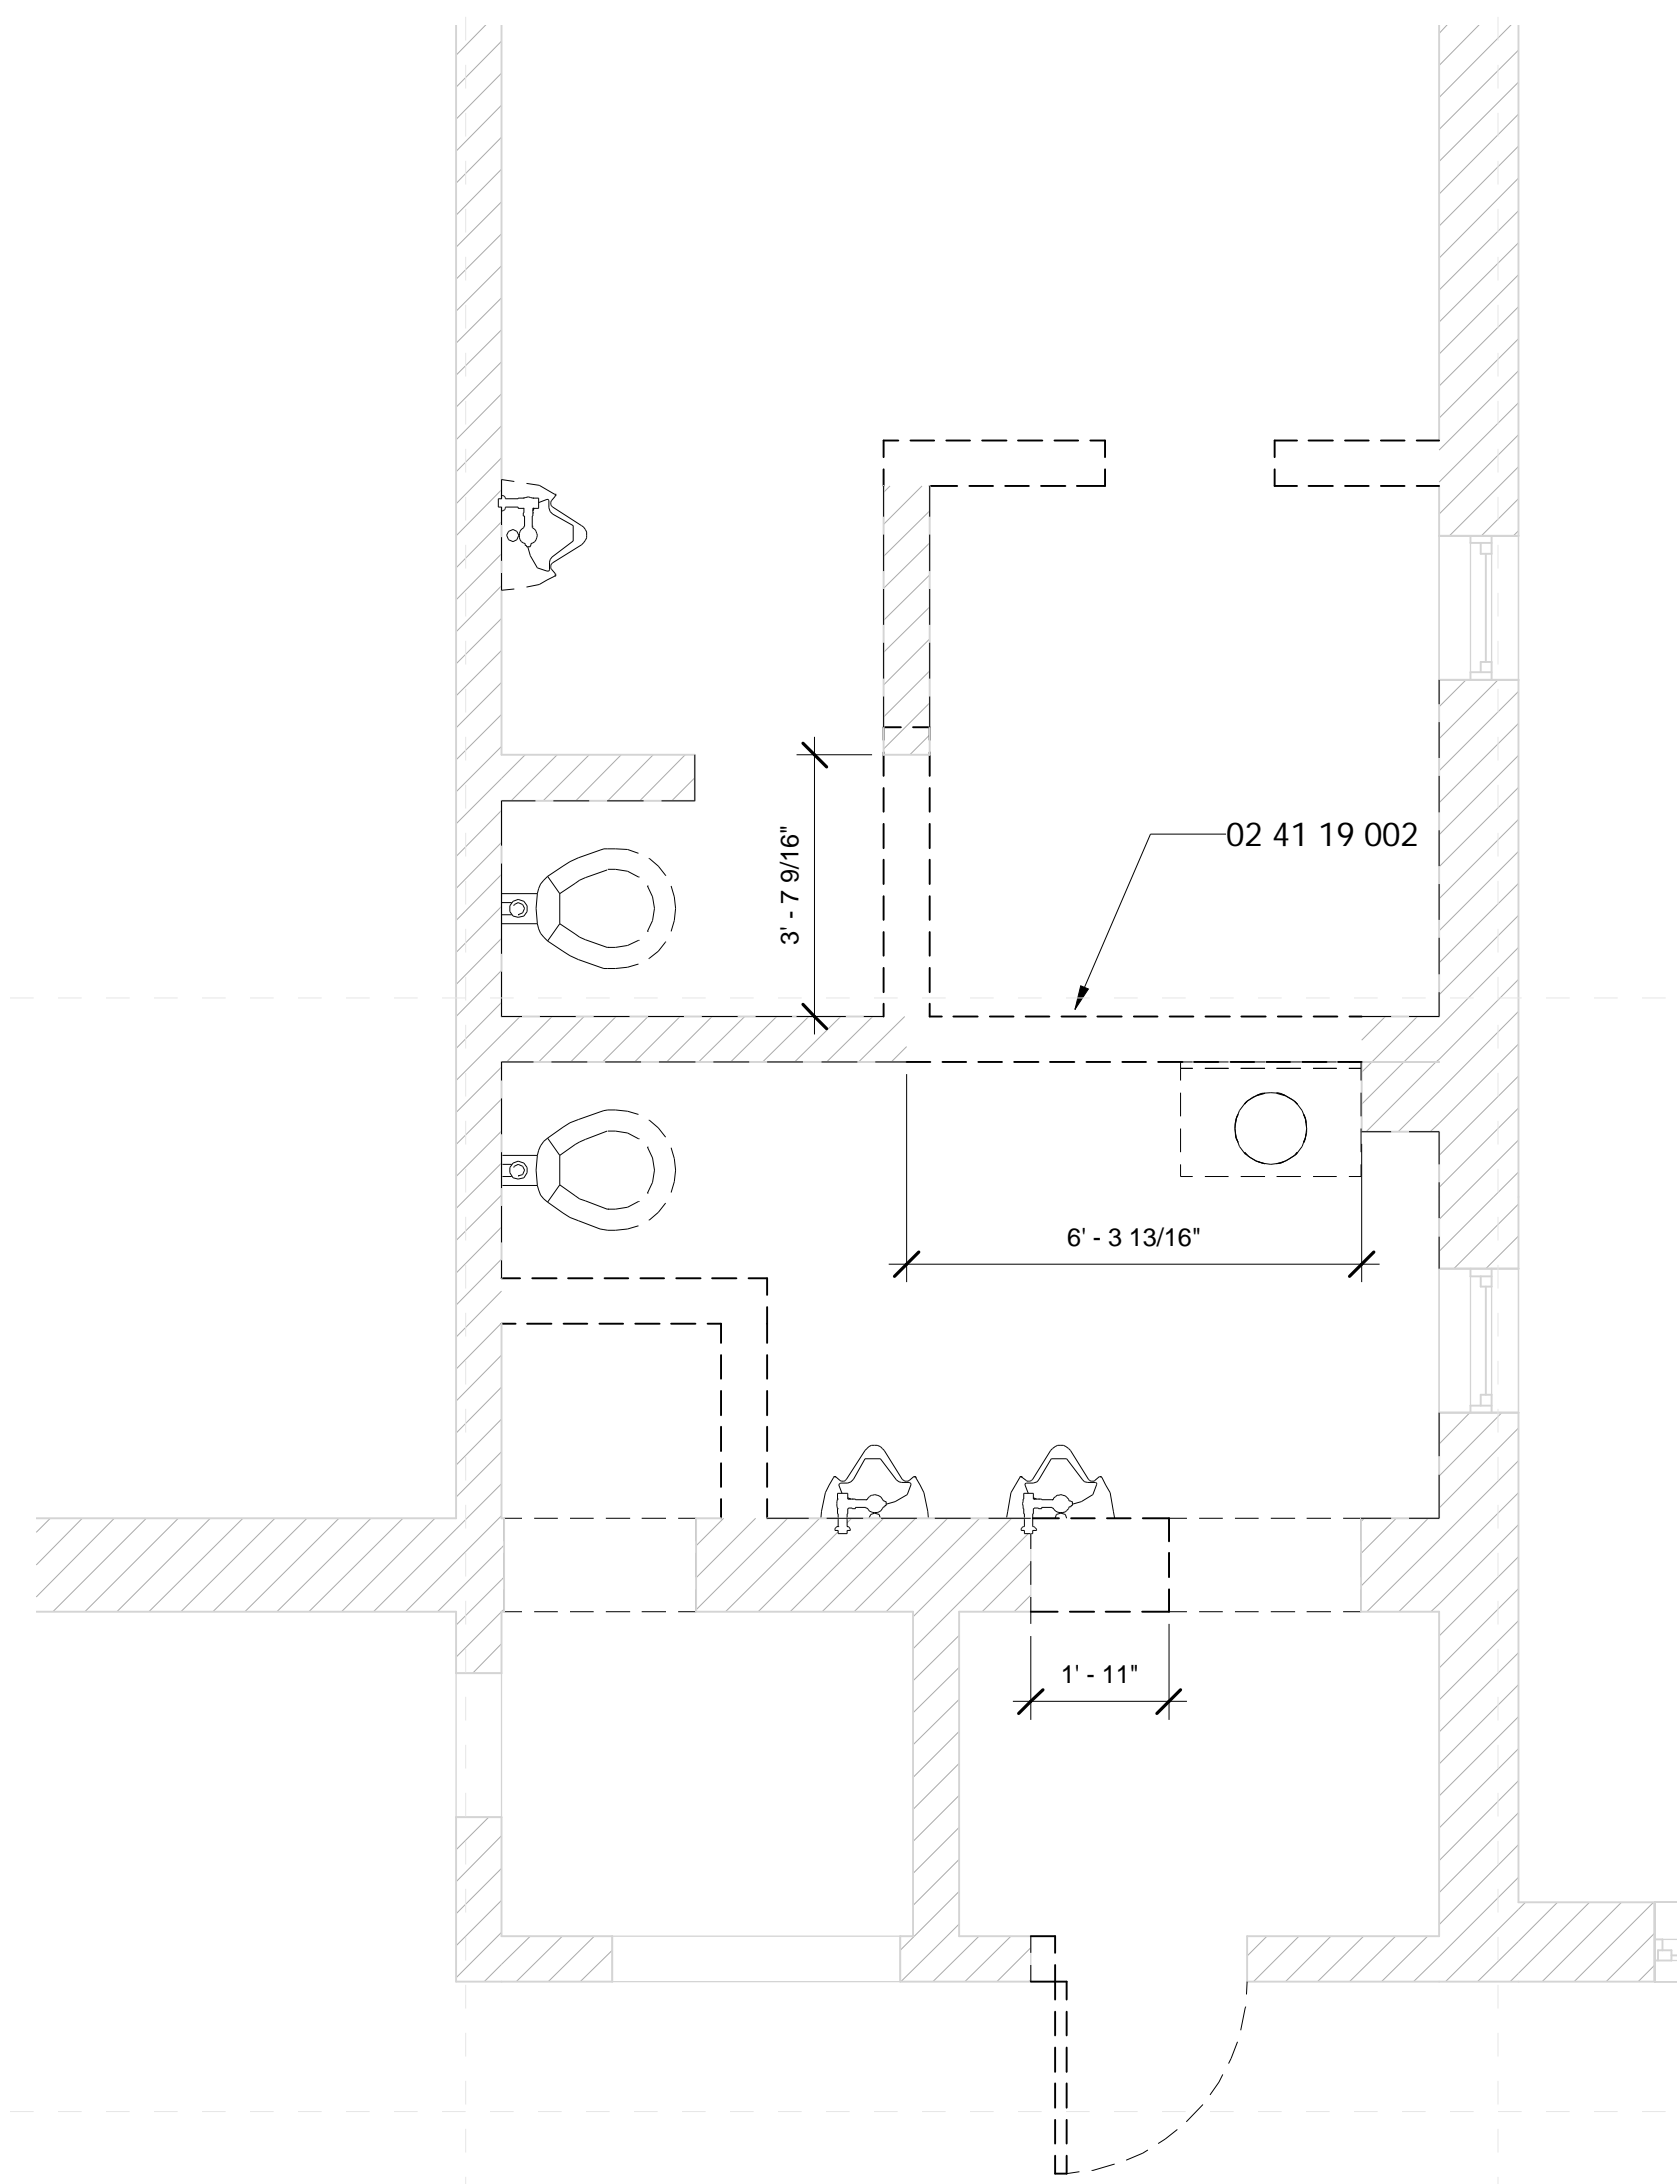


1 NW Boys Toilets - Existing  
3/8" = 1'-0"

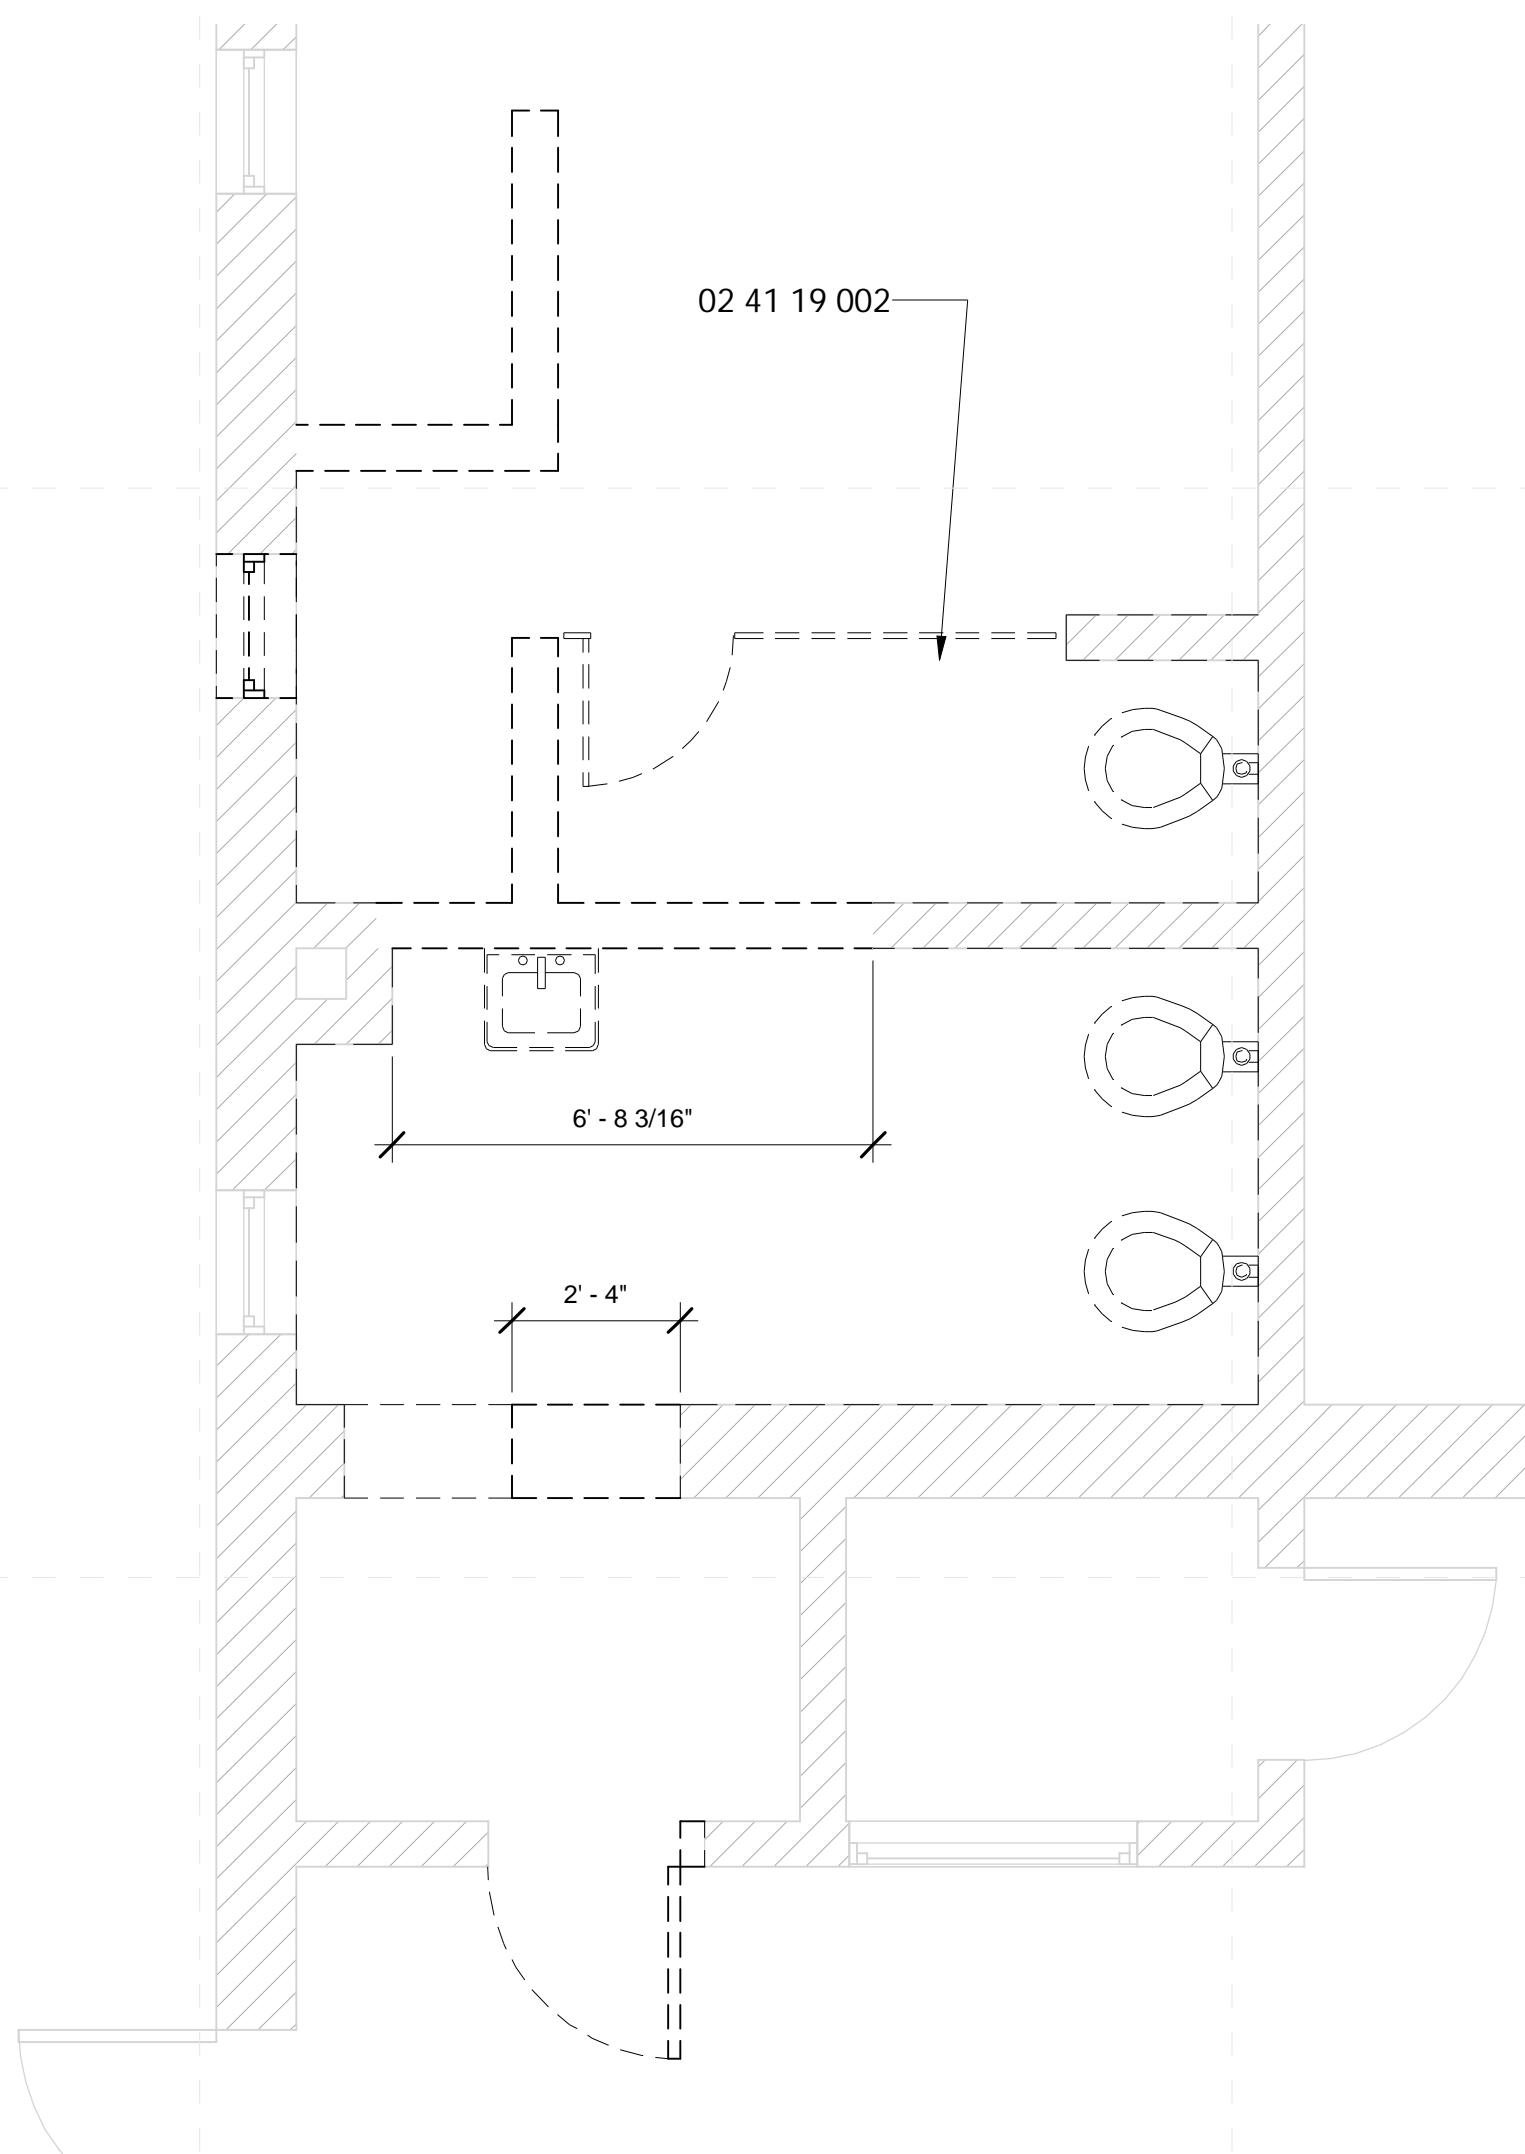

3 NW Girls Toilets - Existing  
3/8" = 1'-0"

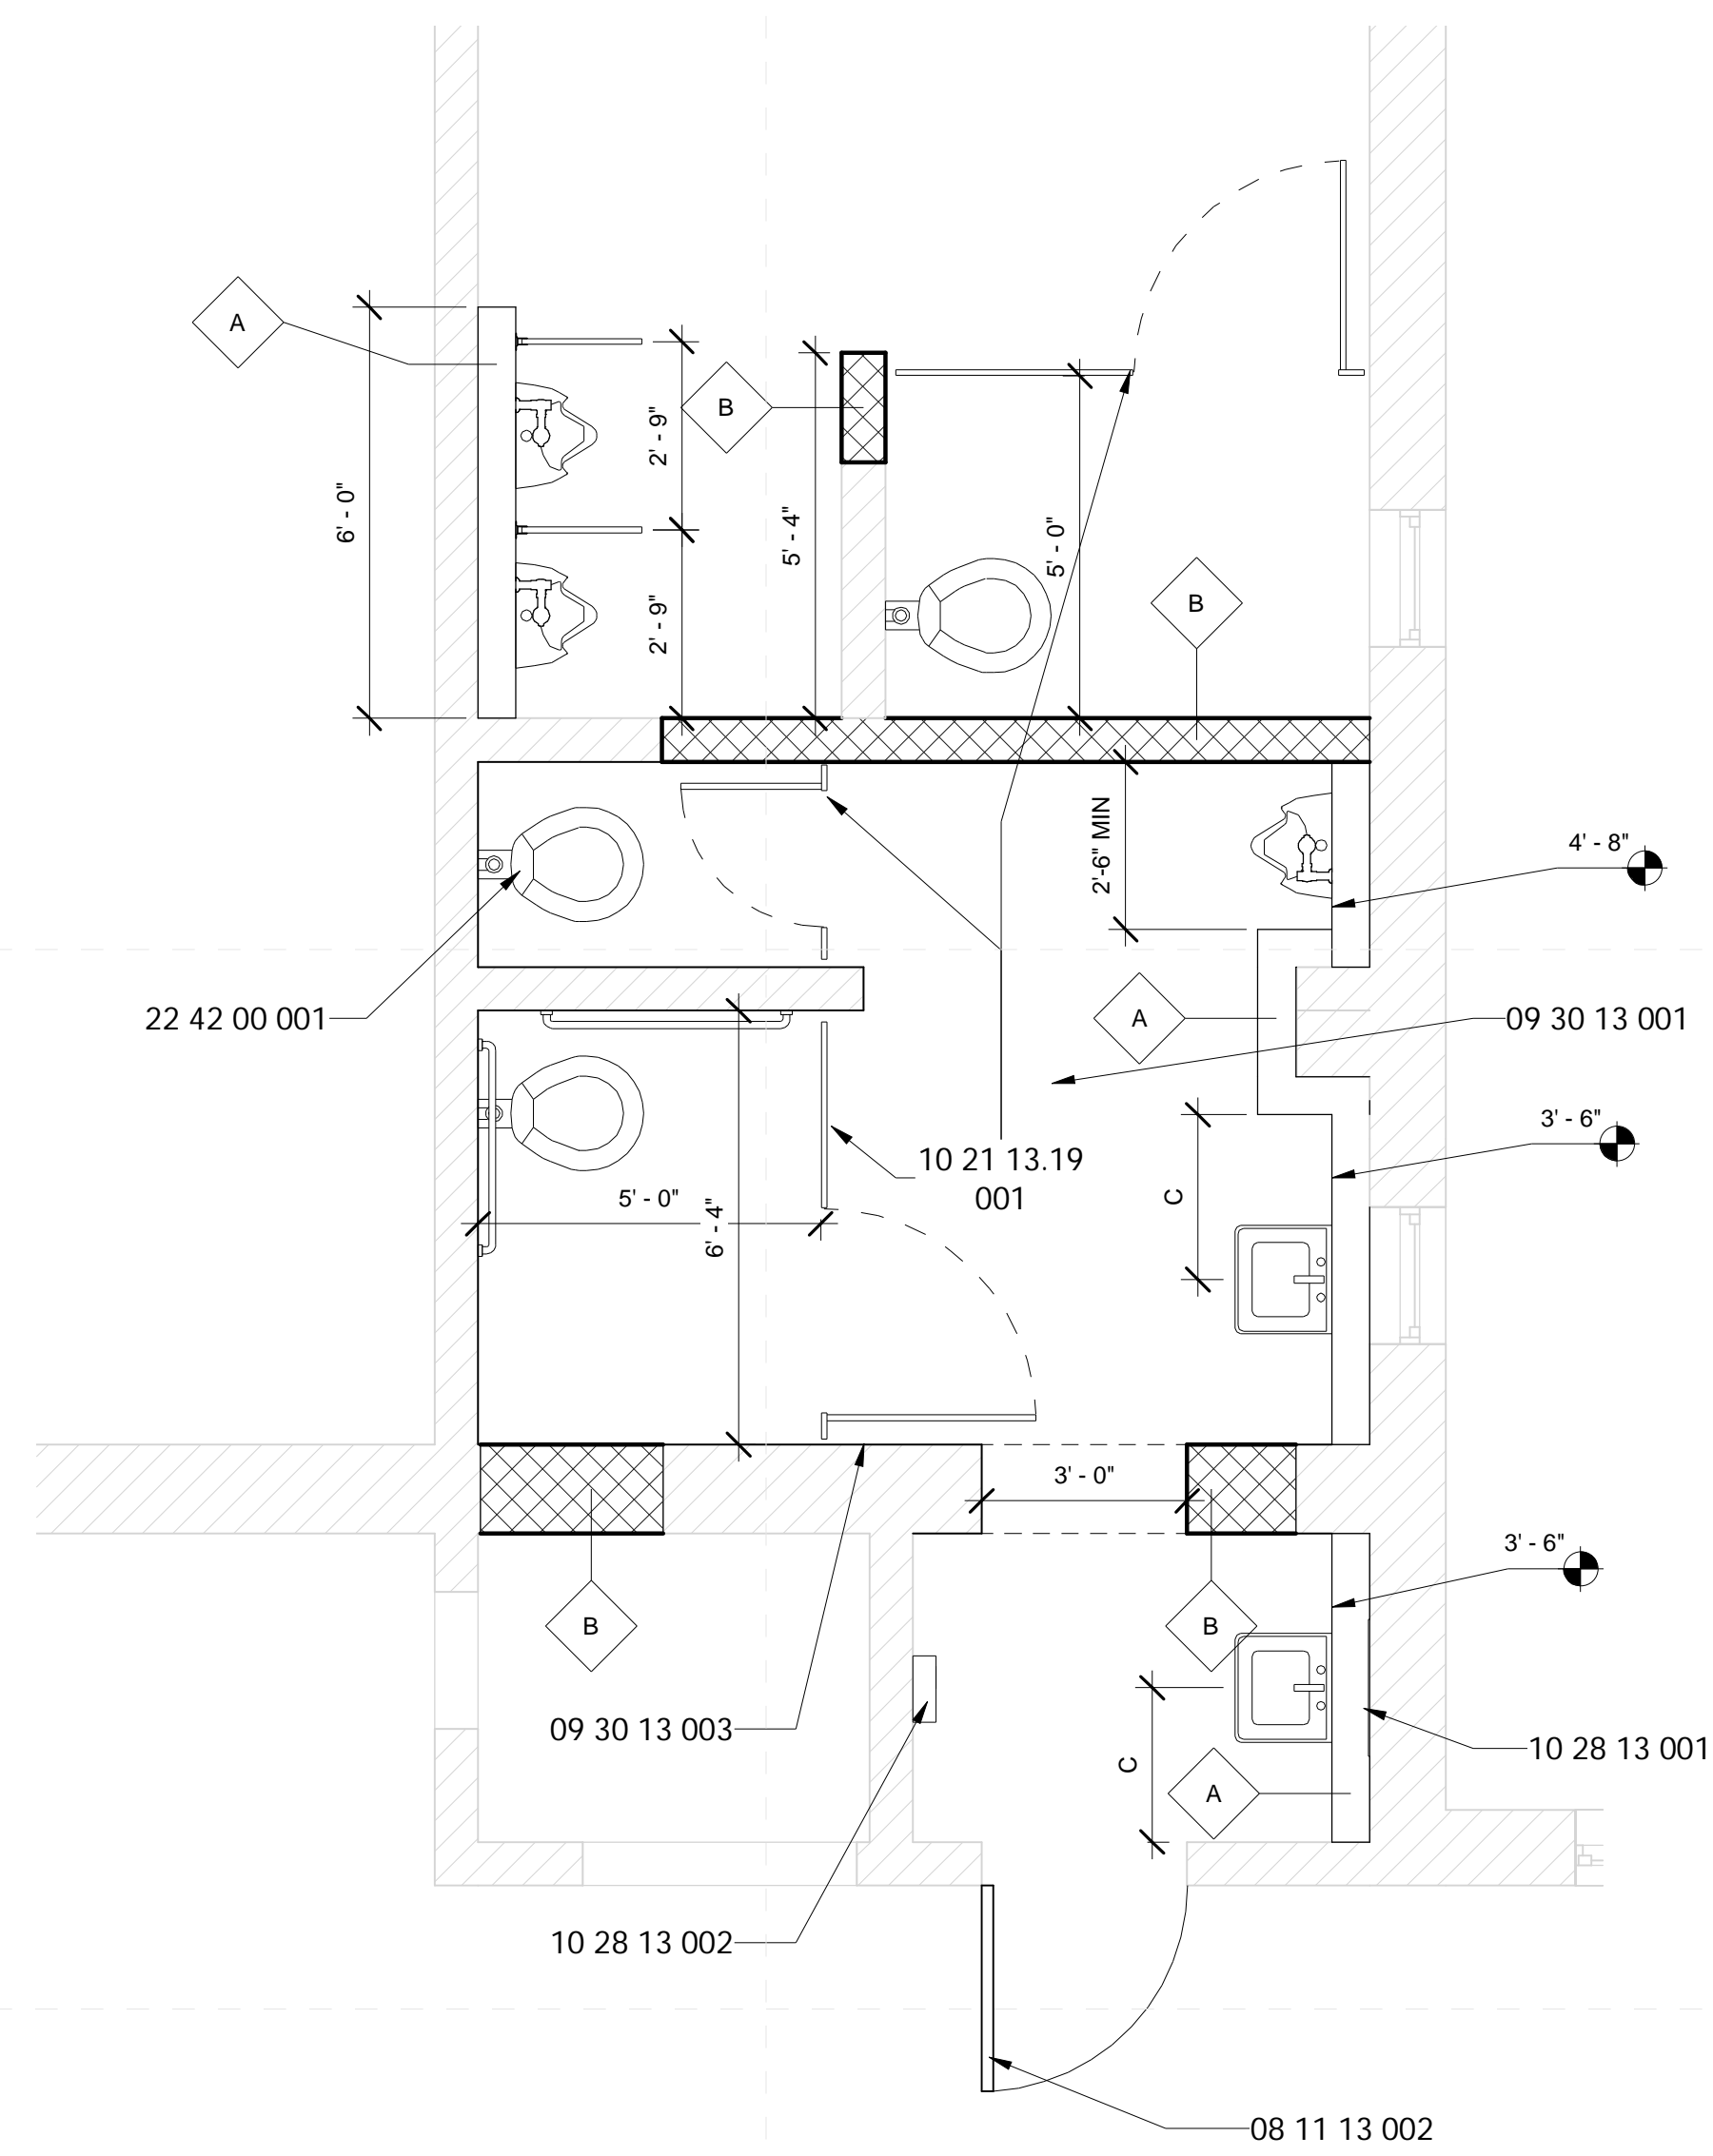

2 NW Boys Toilets - New Construction  
3/8" = 1'-0"

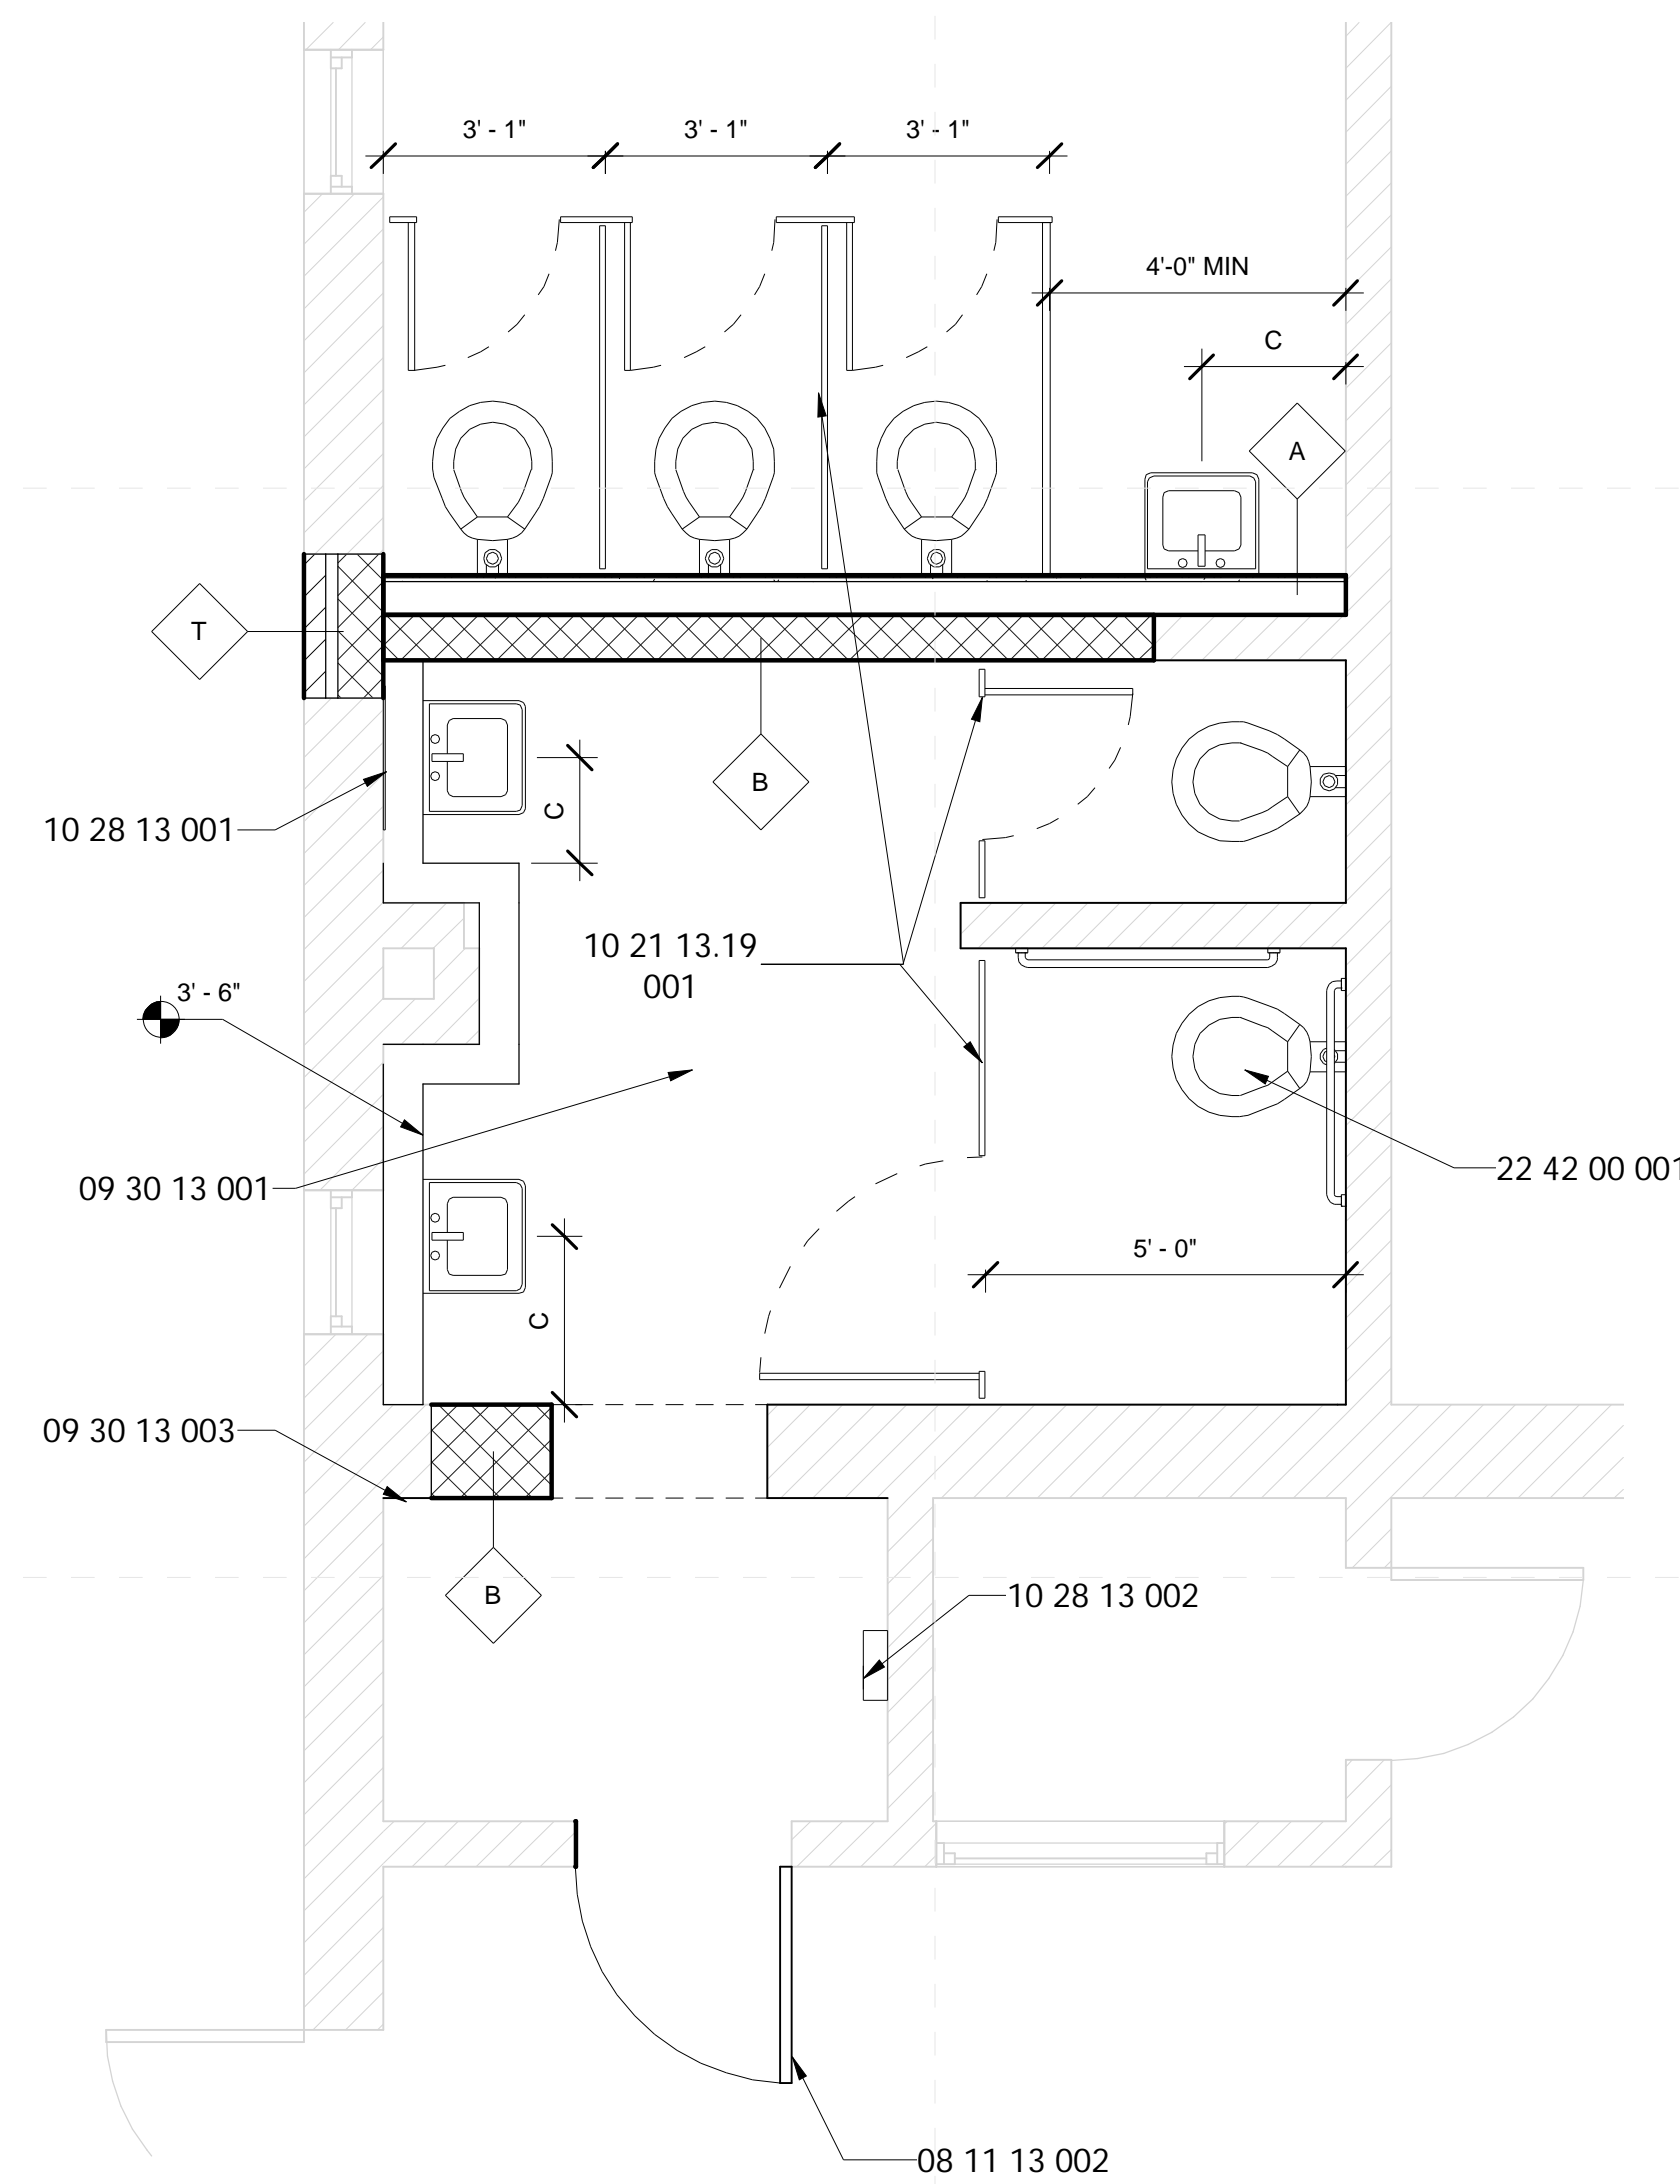

4 NW Girls Toilets - New Construction  
3/8" = 1'-0"

General Finish Plan Notes


- All flooring transitions are to occur at center line of door panel.
- Install new tile at floors, unless noted otherwise.
- New Fixture locations shall be coordinated with mechanical sheets.
- Install new wall tile flush and straight with accent top piece, floor to 4'-0" AFF; typical at bathroom interior unless noted otherwise.
- Install new tile base at all walls in bathrooms.
- Install new grab bars at all ADA & AMB toilets.
- Install moisture resistant back board at all new tile.
- Paint all exposed CMU at renovated toilets.
- Paint Existing Door Jamb and Panels to Remain.

Specific Notes

- 02 41 19 002 Dashed lines indicated extent of demoed work
- 08 11 13 002 Install new 36" HM Door and Frame with new hardware
- 09 30 13 001 Install new floor tile; slope to floor drain is drain provided
- 09 30 13 003 Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise
- 10 21 13.19 001 Install new toilet partitions (typical)
- 10 28 13 001 Install wall hung mirror here; center over fixture unless noted otherwise
- 10 28 13 002 Install hand dryer here; coordinate with electrical & mechanical
- 22 42 00 001 Coordinate new fixture installations with mechanical, typical for new

General Demolition Notes

- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

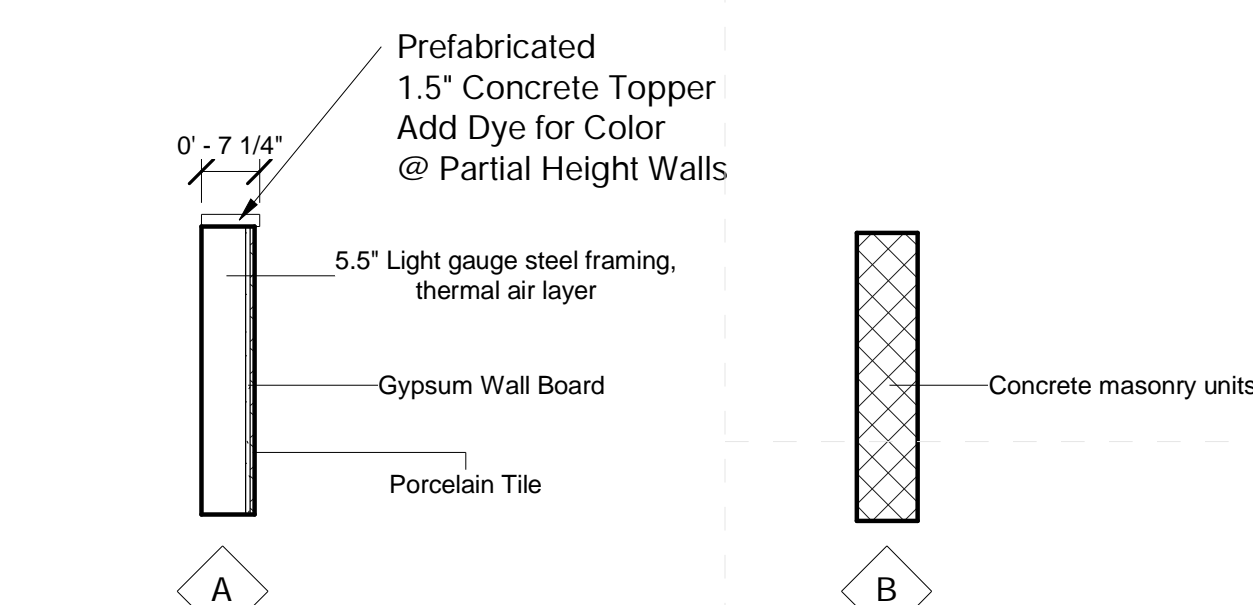

Wall Types  
1/2" = 1'-0"

10/5/2021 11:27:17 AM D:\my stuff\BUSINESS\SS\work\2019 dale\Partners\21027 - Sunflower County\_models\21081 Thomas Edwards.M





**General Finish Plan Notes**





- All flooring transitions are to occur at center line of door panel.
- Install new tile at floors, unless noted otherwise.
- New Fixture locations shall be coordinated with mechanical sheets.
- Install new wall tile flush and straight with accent top piece, floor to 4'-0" AFF; typical at bathroom interior unless noted otherwise
- Install new tile base at all walls in bathrooms
- Install new grab bars at all ADA & AMB toilets
- Install moisture resistant back board at all new tile.
- Paint all exposed CMU at renovated toilets.
- Paint Existing Door Jamb and Panels to Remain.

**Specific Notes**

- 02 41 19 002 Dashed lines indicated extent of demoed work
- 02 41 19 003 Demo FRP & Base at walls; typical at all bathroom interiors unless otherwise noted
- 08 11 13 002 Install new 36" HM Door and Frame with new hardware
- 09 29 00 001 Overlay existing with 1/2" drywall, glued and screwed, finished to level 4, primed, & painted, @ 3'-6" AFF to Above Ceiling (typical above tile wainscot at toilet room interior)
- 09 30 13 001 Install new floor tile: slope to floor drain is drain provided
- 09 30 13 003 Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise
- 09 30 13 005 Install new wall tile flush and straight, floor to ceiling at this plumbing wall only
- 09 30 13 006 Install accent tile at this wall
- 09 30 13 007 Tile floor to remain; patch and repair any damages as well as any alterations due to construction for finished look
- 10 21 13.19 001 Install new toilet partitions (typical)
- 10 28 13 001 Install wall hung mirror here: center over fixture unless noted otherwise
- 10 28 13 002 Install hand dryer here: coordinate with electrical & mechanical
- 22 42 00 001 Coordinate new fixture installations with mechanical, typical for new


**General Demolition Notes**

- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

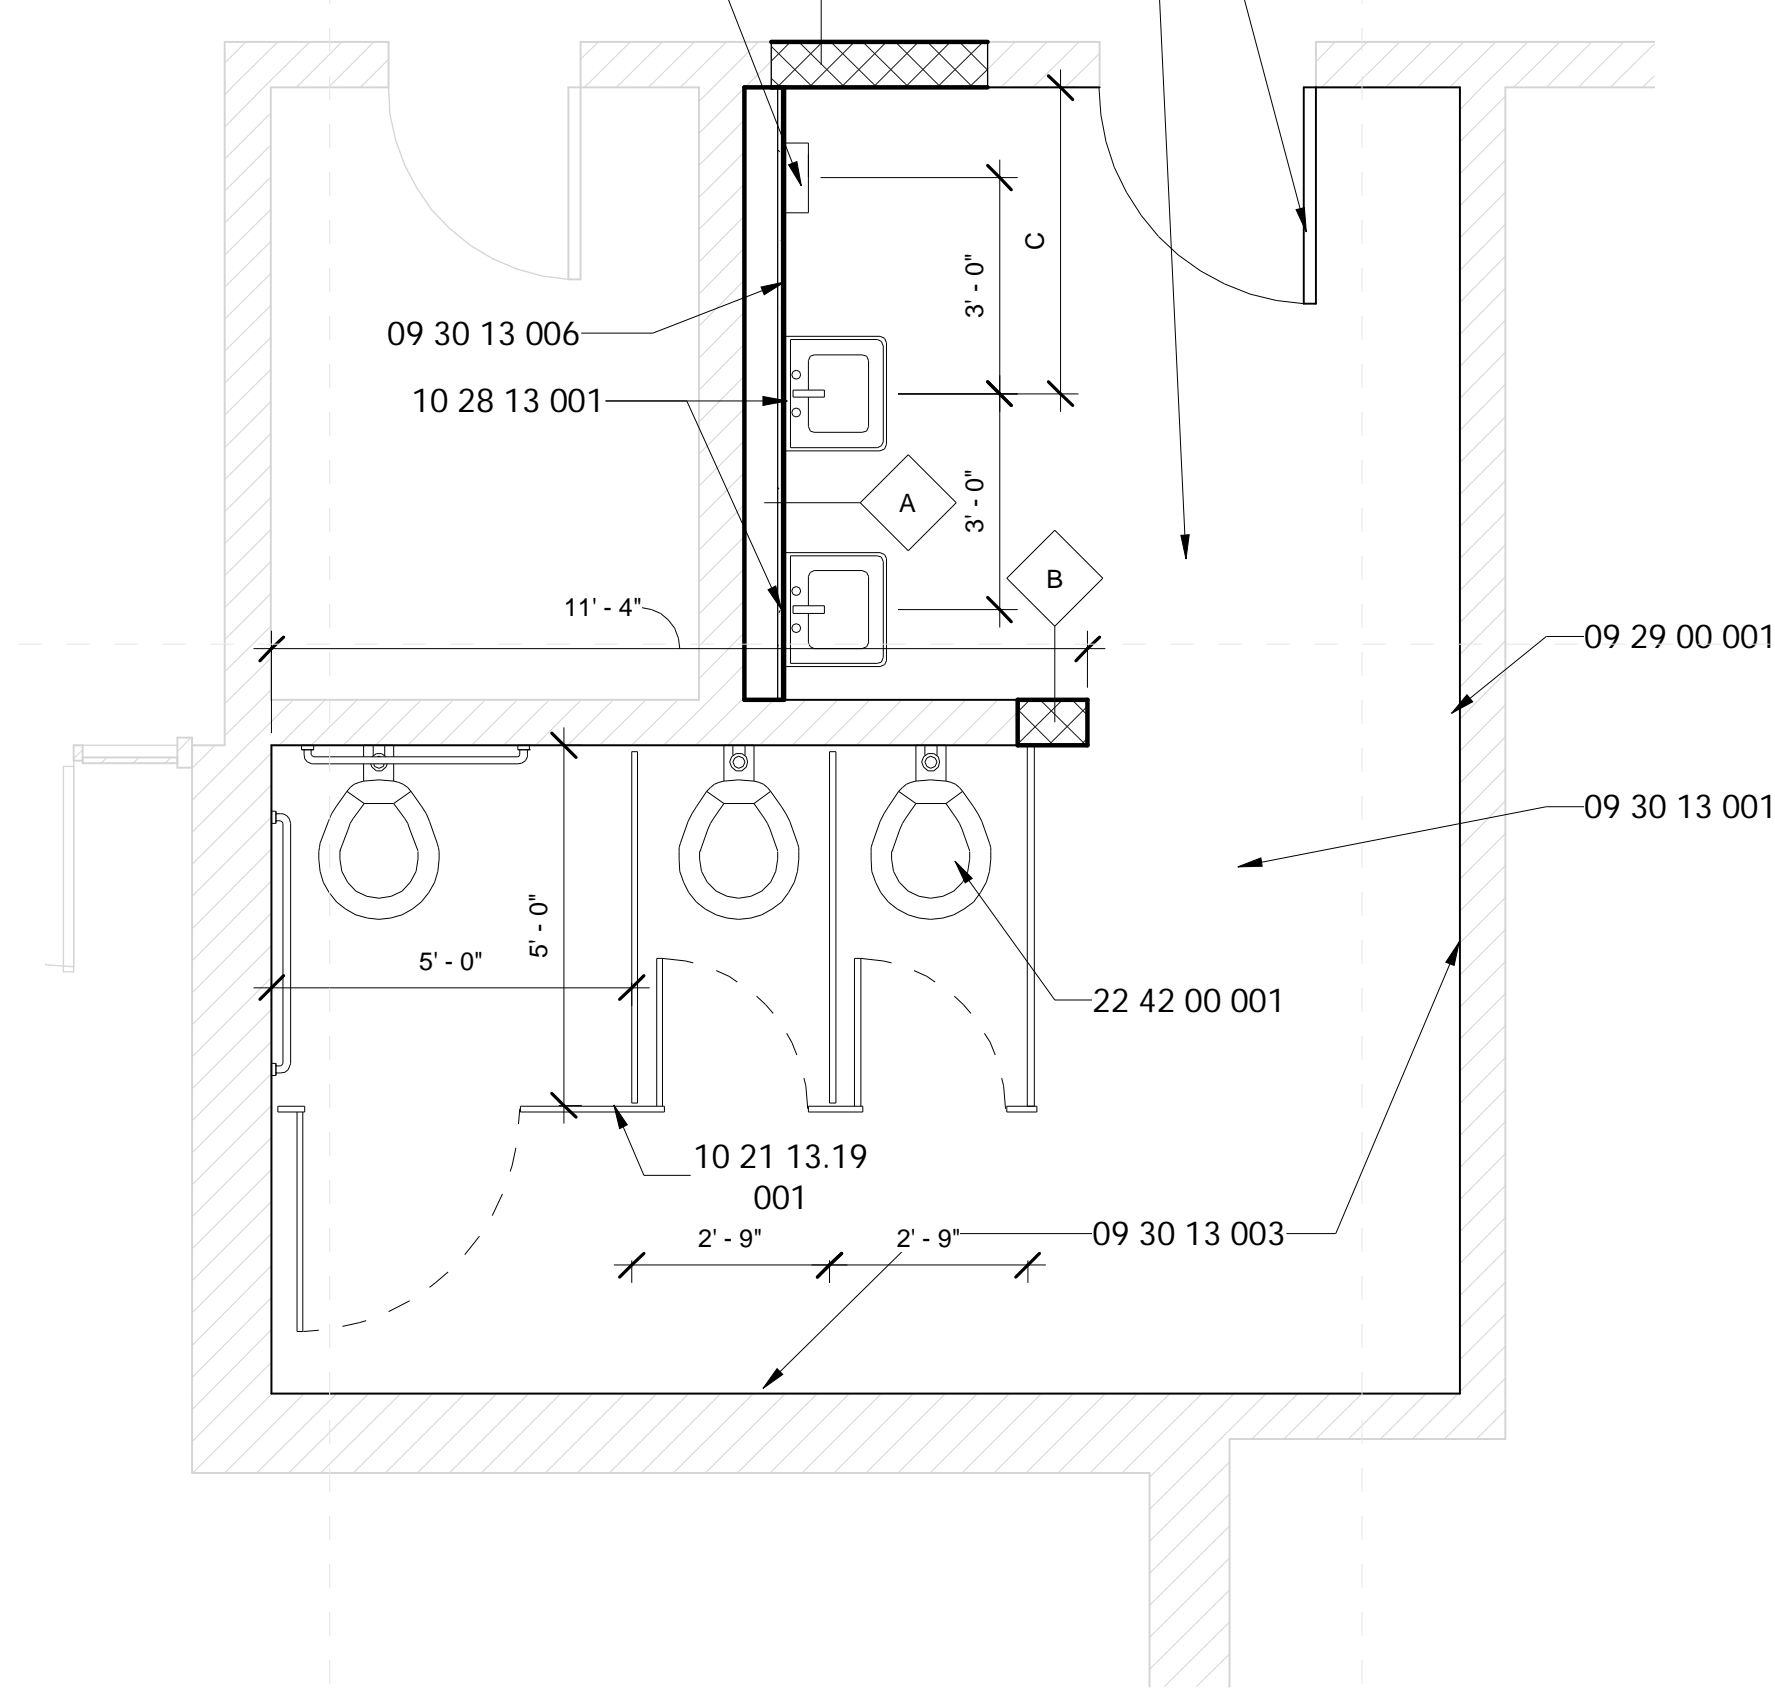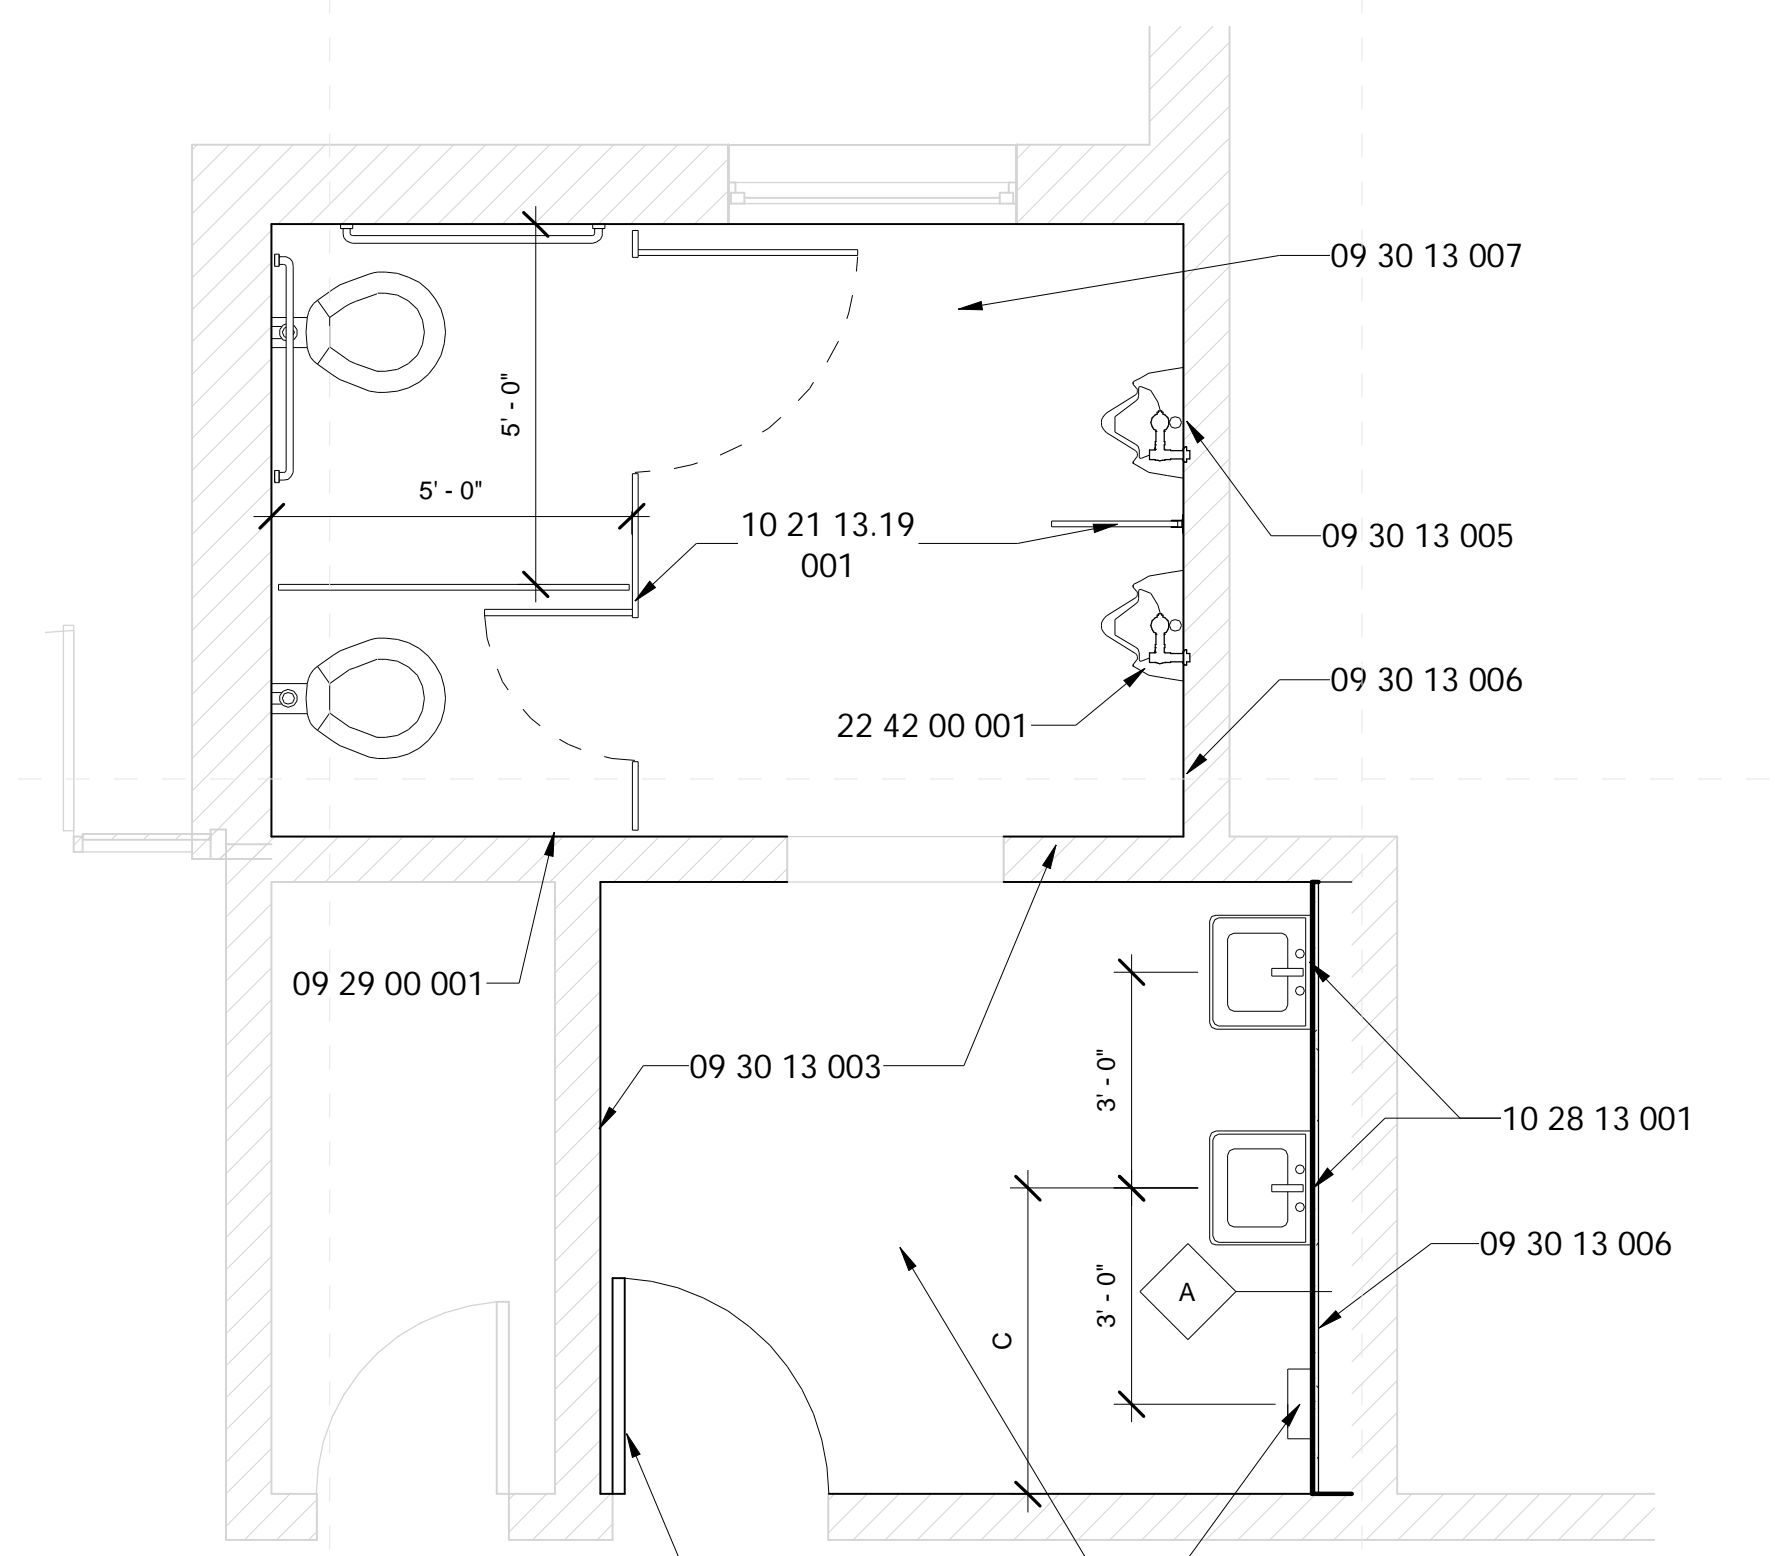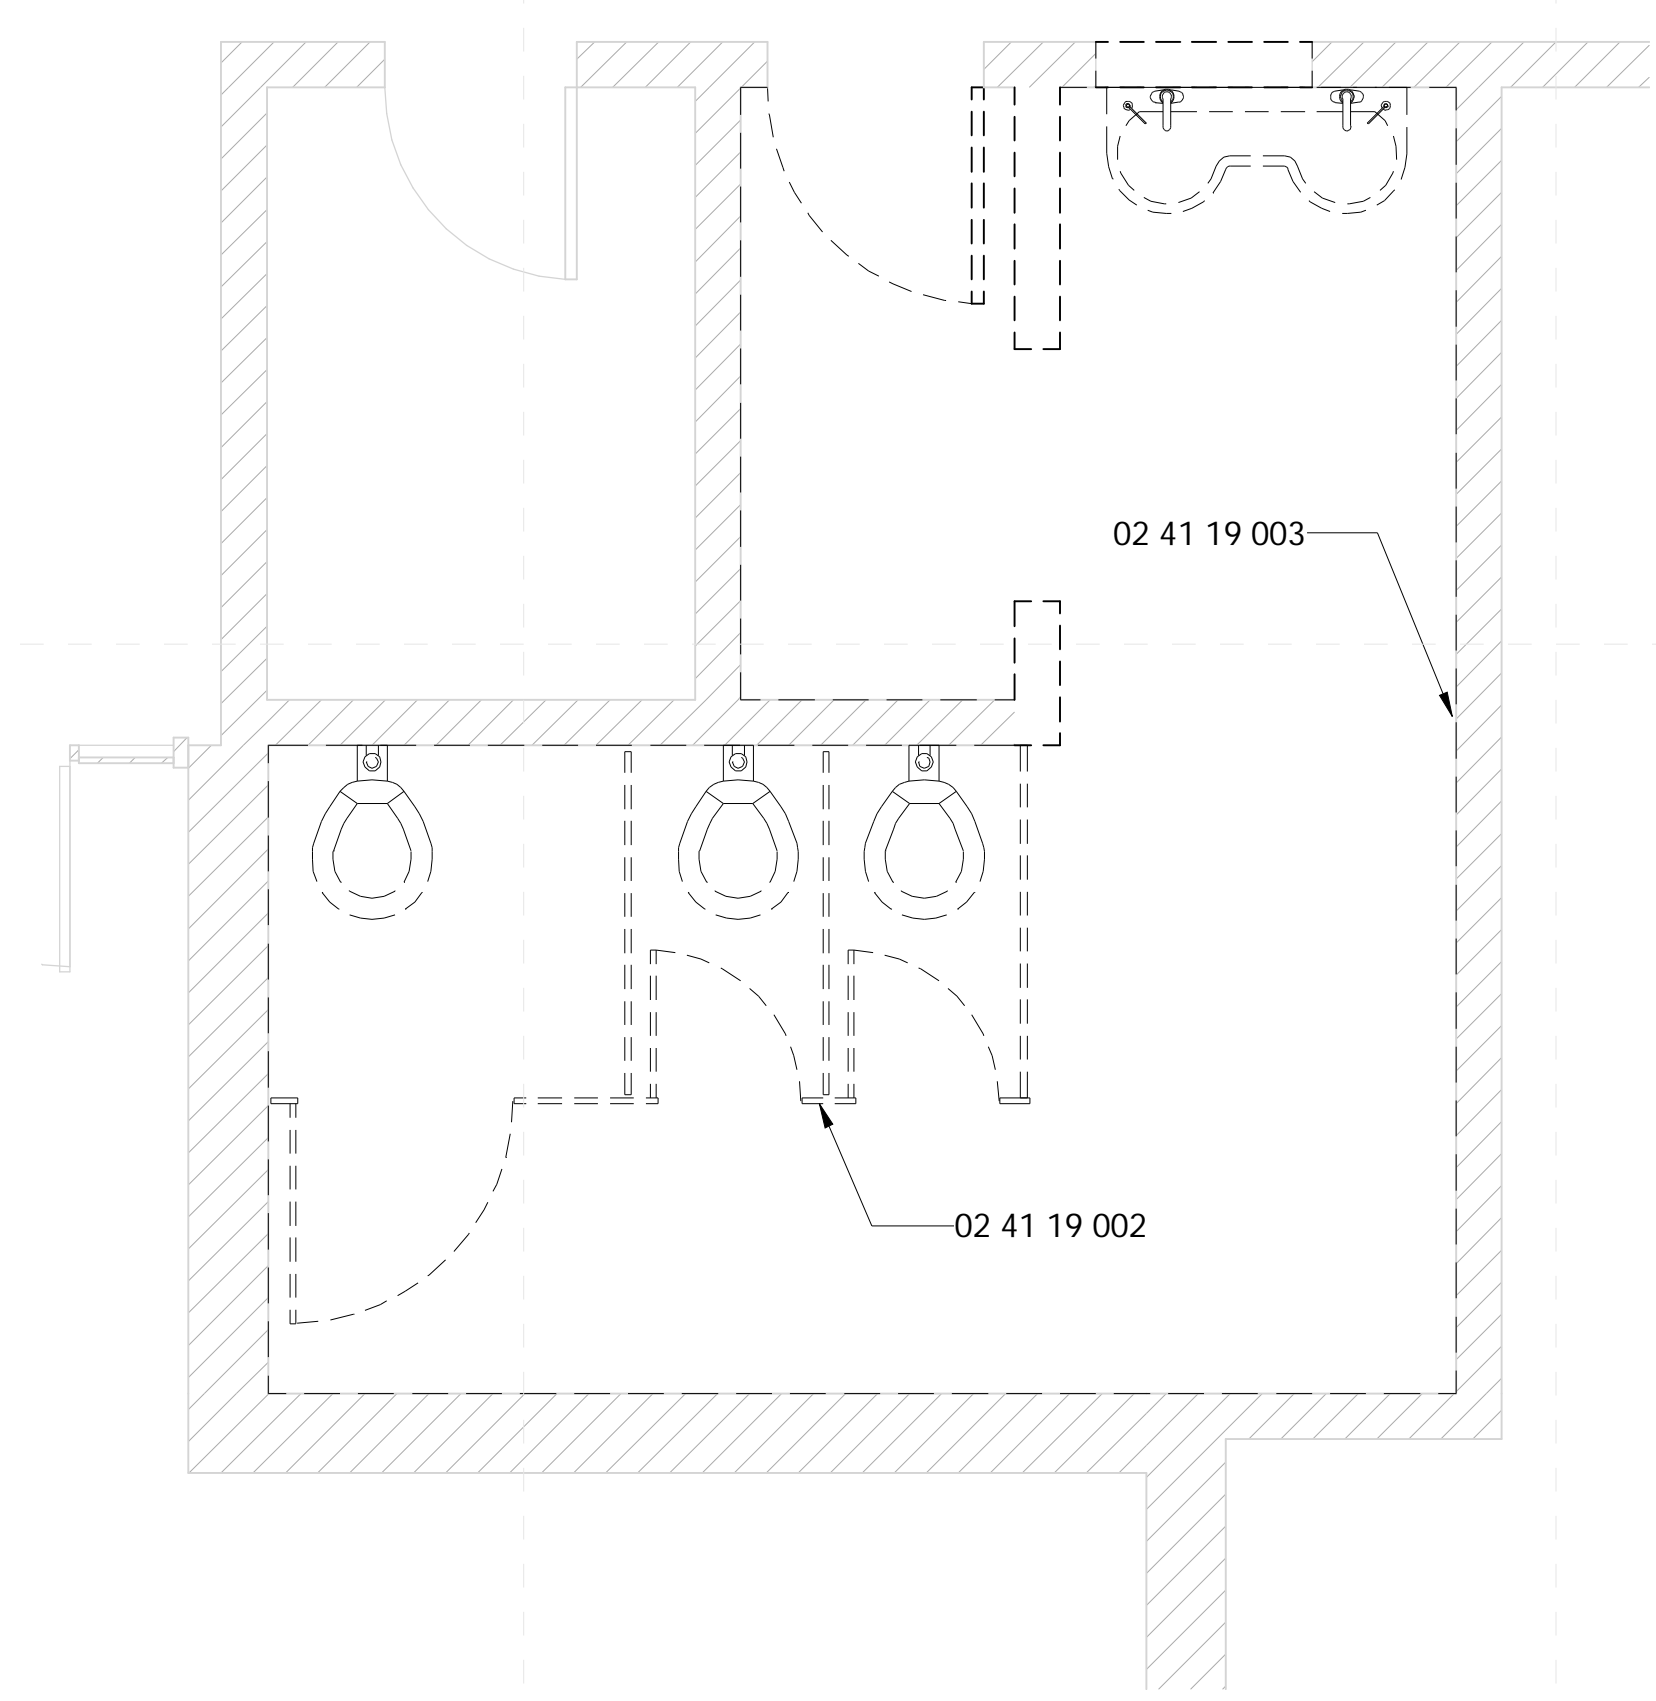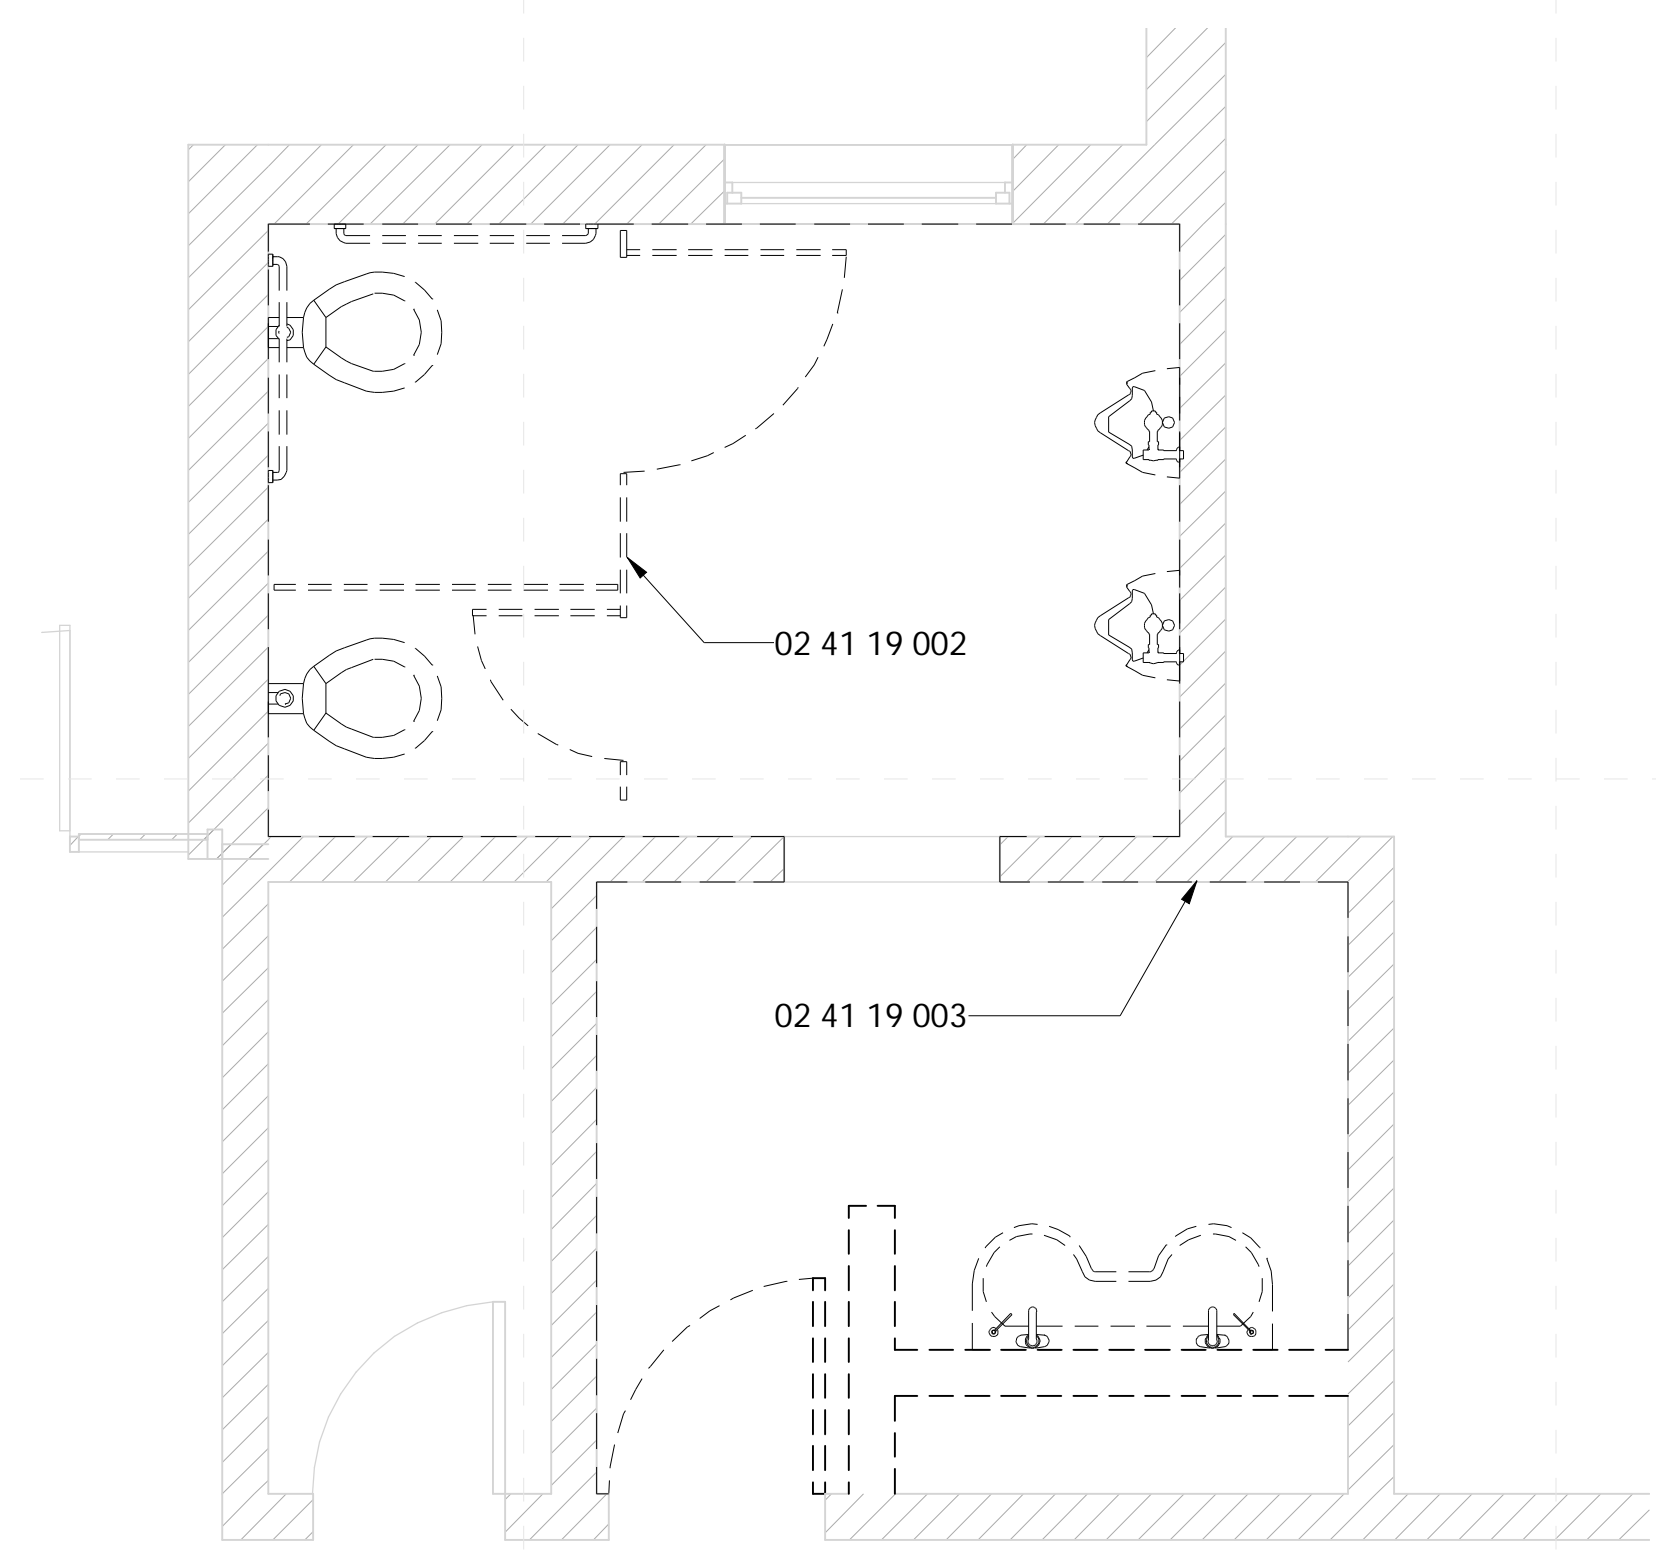

**1 NE Toilets - Existing**  
3/8" = 1'-0"

**2 NE Toilets - New Construction**  
3/8" = 1'-0"

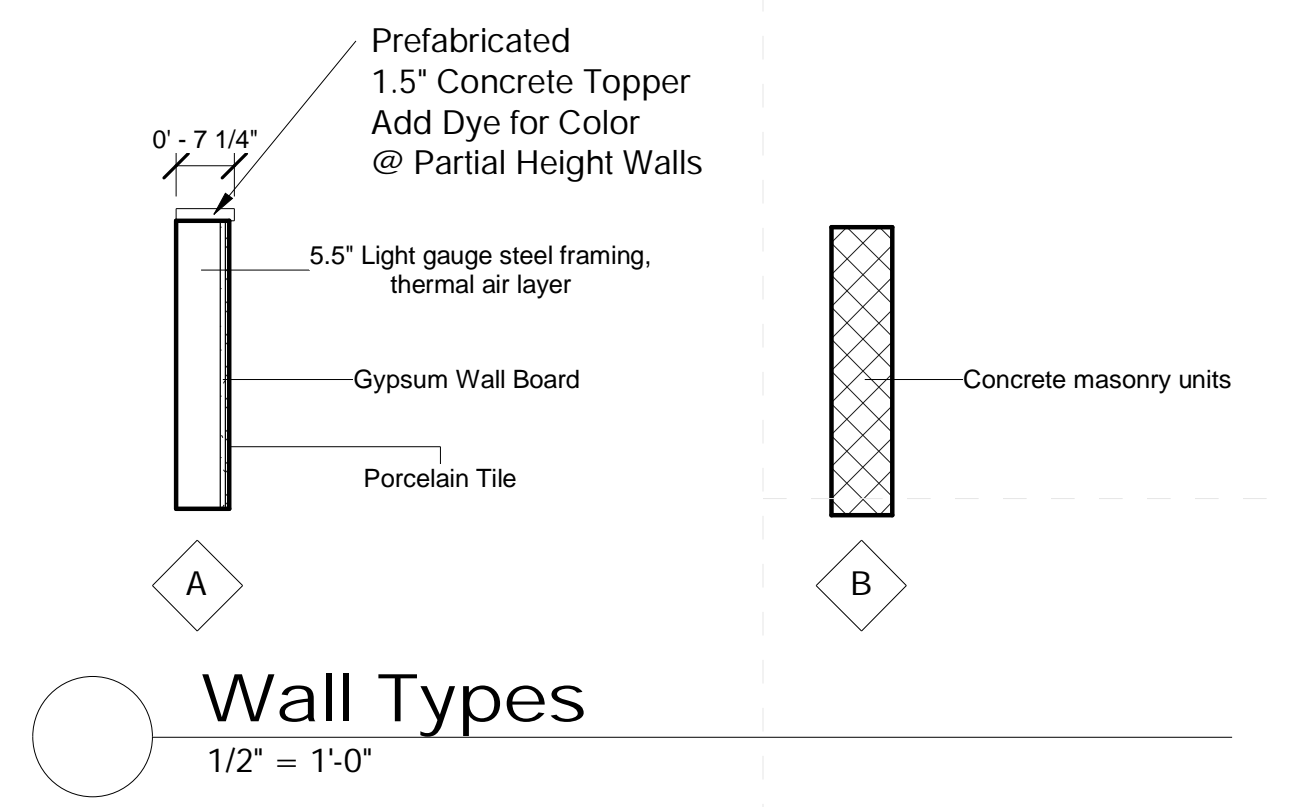

10/5/2021 11:27:18 AM D:\my stuff\BUSINESS\work\2019 dale\Partners\21027- Sunflower County\_models\21081 Thomas Edwards.rvt



Not For Construction

Thomas Edwards High School  
360 L F Packer Dr, Ruleville, MS 38771

Schematic Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

A403

Central Bathrooms

**General Finish Plan Notes**


1. All flooring transitions are to occur at center line of door panel.
2. Install new tile at floors, unless noted otherwise.
3. New Fixture locations shall be coordinated with mechanical sheets.
4. Install new wall tile flush and straight with accent top piece, floor to 4'-0" AFF; typical at bathroom interior unless noted otherwise
5. Install new tile base at all walls in bathrooms
6. Install new grab bars at all ADA & AMB toilets
7. Install moisture resistant back board at all new tile.
8. Paint all exposed CMU at renovated toilets.
9. Paint Existing Door Jambs and Panels to Remain.

**Specific Notes**


- |                 |   |
|-----------------|---|
| 02 41 19 002    | Dashed lines indicated extent of demoed work  |
| 02 41 19 003    | Demo FRP & Base at walls; typical at all bathroom interiors unless otherwise noted  |
| 08 71 00 001    | Replace all door hardware with new at existing leaf   |
| 09 29 00 001    | Overlay existing with 1/2" drywall, glued and screwed, finished to level 4, primed, & painted, @ 3'-6" AFF to Above Ceiling (typical above tile wainscot at toilet room interior) |
| 09 30 13 003    | Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise                     |
| 09 30 13 005    | Install new wall tile flush and straight, floor to ceiling at this plumbing wall only   |
| 09 30 13 006    | Install accent tile at this wall  |
| 09 65 19.19 001 | Install new VCT flooring according to pattern shown   |
| 10 21 13.19 001 | Install new toilet partitions (typical)   |
| 10 28 13 001    | Install wall hung mirror here: center over fixture unless noted otherwise   |
| 10 28 13 002    | Install hand dryer here: coordinate with electrical & mechanical  |
| 22 42 00 001    | Coordinate new fixture installations with mechanical, typical for new   |

**General Demolition Notes**


1. Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
2. Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
3. Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
4. Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
5. Burying or Burning of materials will not be permitted on site.
6. Repair any damage caused to building construction identified to remain.
7. Refer to other discipline drawings for additional demolition information as noted
8. Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
9. Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
10. Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

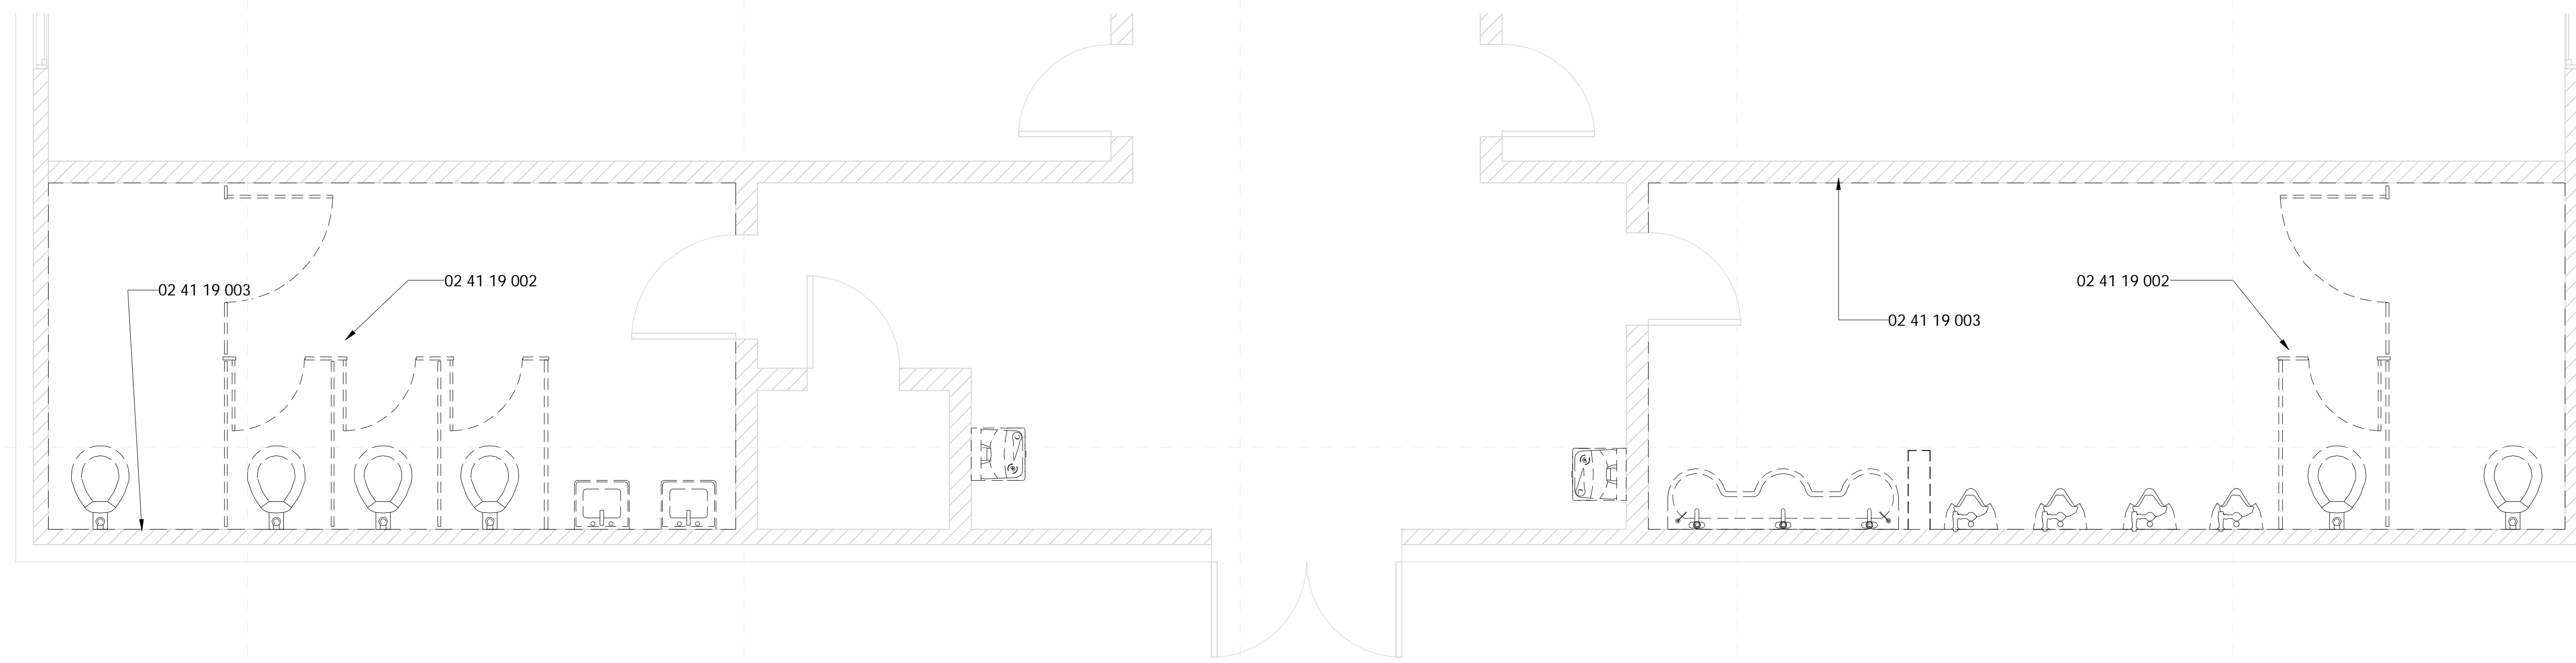

**1 Central Toilets - Existing**  
3/8" = 1'-0"

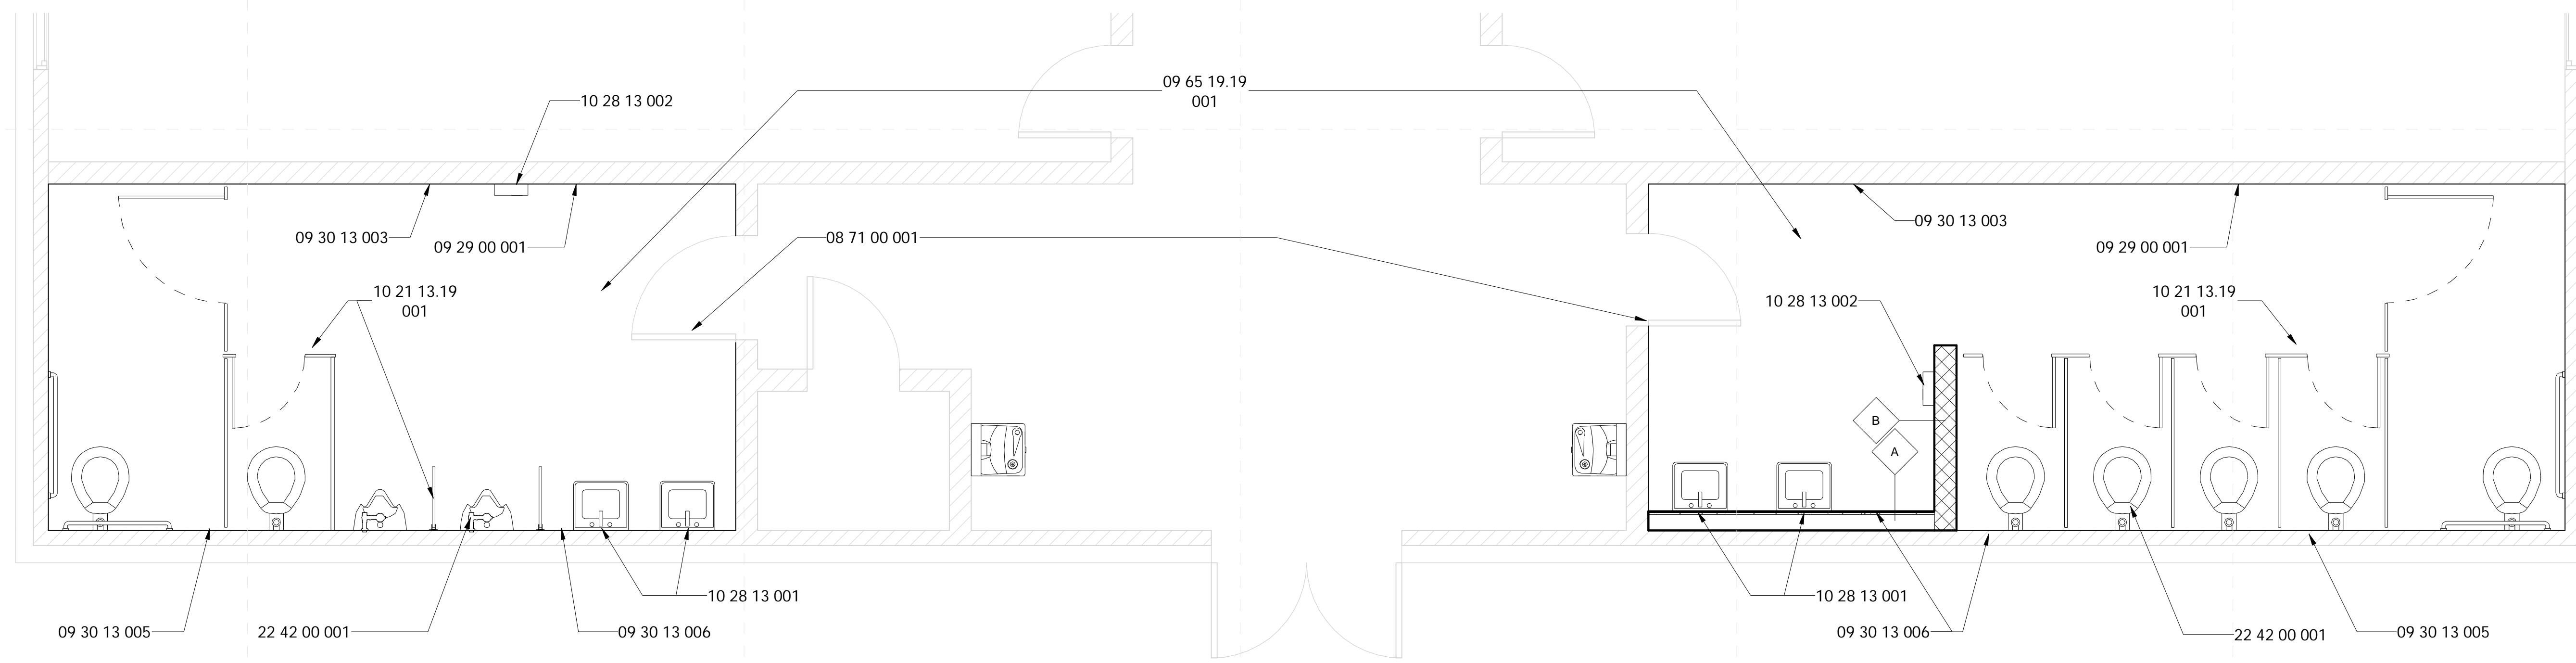


**2 Central Toilets - New Construction**  
3/8" = 1'-0"

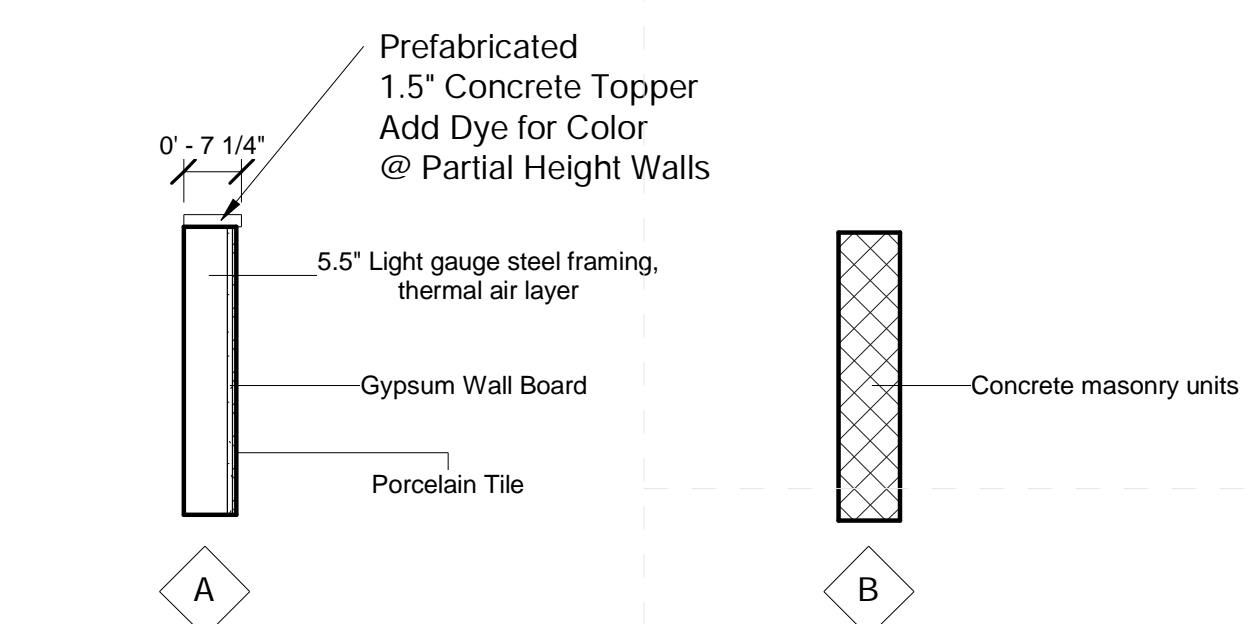

**Wall Types**  
1/2" = 1'-0"



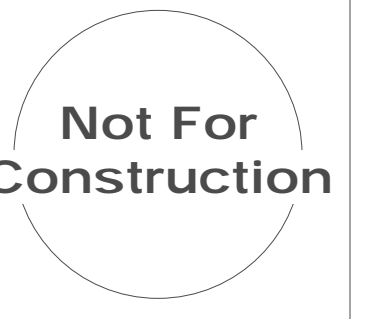

**General Finish Plan Notes**


- All flooring transitions are to occur at center line of door panel.
- Install new tile at floors, unless noted otherwise.
- New Fixture locations shall be coordinated with mechanical sheets.
- Install new wall tile flush and straight with accent top piece, floor to 4'-0" AFF; typical at bathroom interior unless noted otherwise.
- Install new tile base at all walls in bathrooms.
- Install new grab bars at all ADA & AMB toilets.
- Paint all exposed CMU at renovated toilets.
- Paint Existing Door Jambs and Panels to Remain.

**Specific Notes**


- 02 41 19 002 Dashed lines indicated extent of demo work
- 02 41 19 003 Demo FRP & Base at walls; typical at all bathroom interiors unless otherwise noted
- 08 71 00 001 Replace all door hardware with new at existing leaf
- 09 29 00 001 Overlay existing with 1/2" drywall, glued and screwed, finished to level 4, primed, & painted, @ 3'-6" AFF to Above Ceiling (typical above tile wainscot at toilet room interior)
- 09 30 13 003 Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise
- 09 30 13 005 Install new wall tile flush and straight, floor to ceiling at this plumbing wall only
- 09 30 13 006 Install accent tile at this wall
- 10 21 13.19 001 Install new toilet partitions (typical)
- 10 28 13 001 Install wall hung mirror here; center over fixture unless noted otherwise
- 10 28 13 002 Install hand dryer here; coordinate with electrical & mechanical
- 22 42 00 001 Coordinate new fixture installations with mechanical, typical for new

**General Demolition Notes**


- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc.. where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

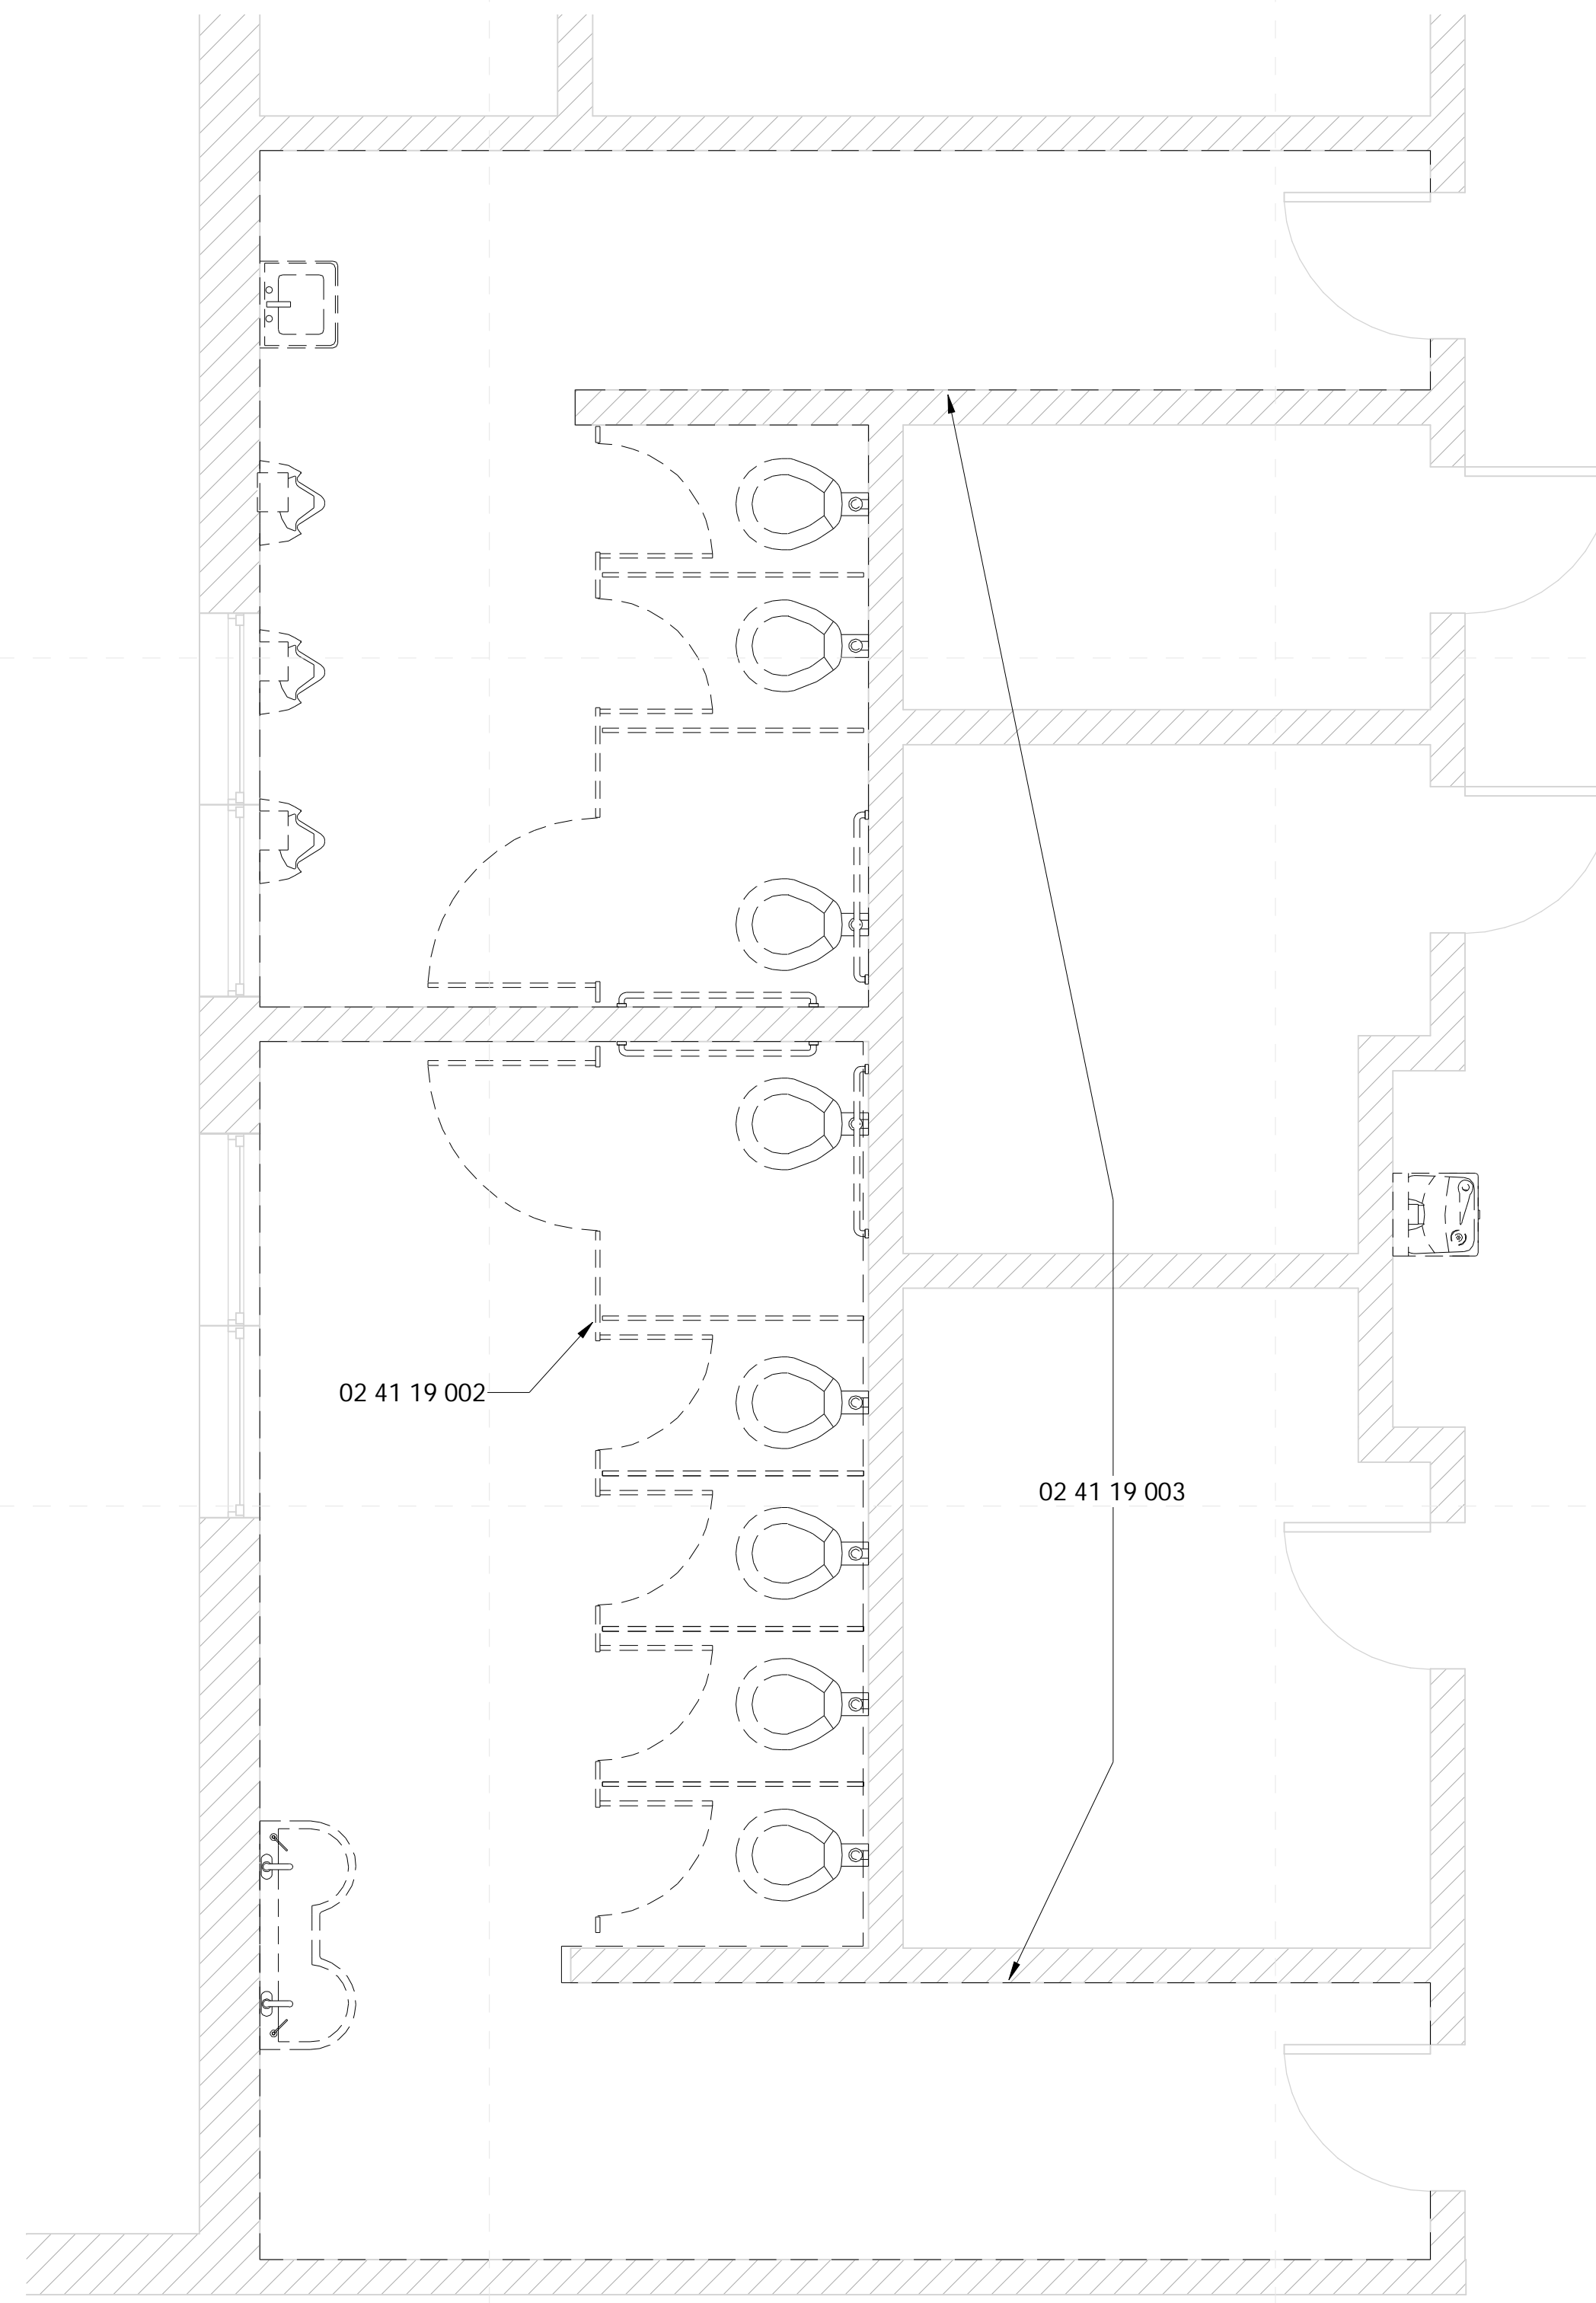

**1 South Toilets - Existing**  
3/8" = 1'-0"

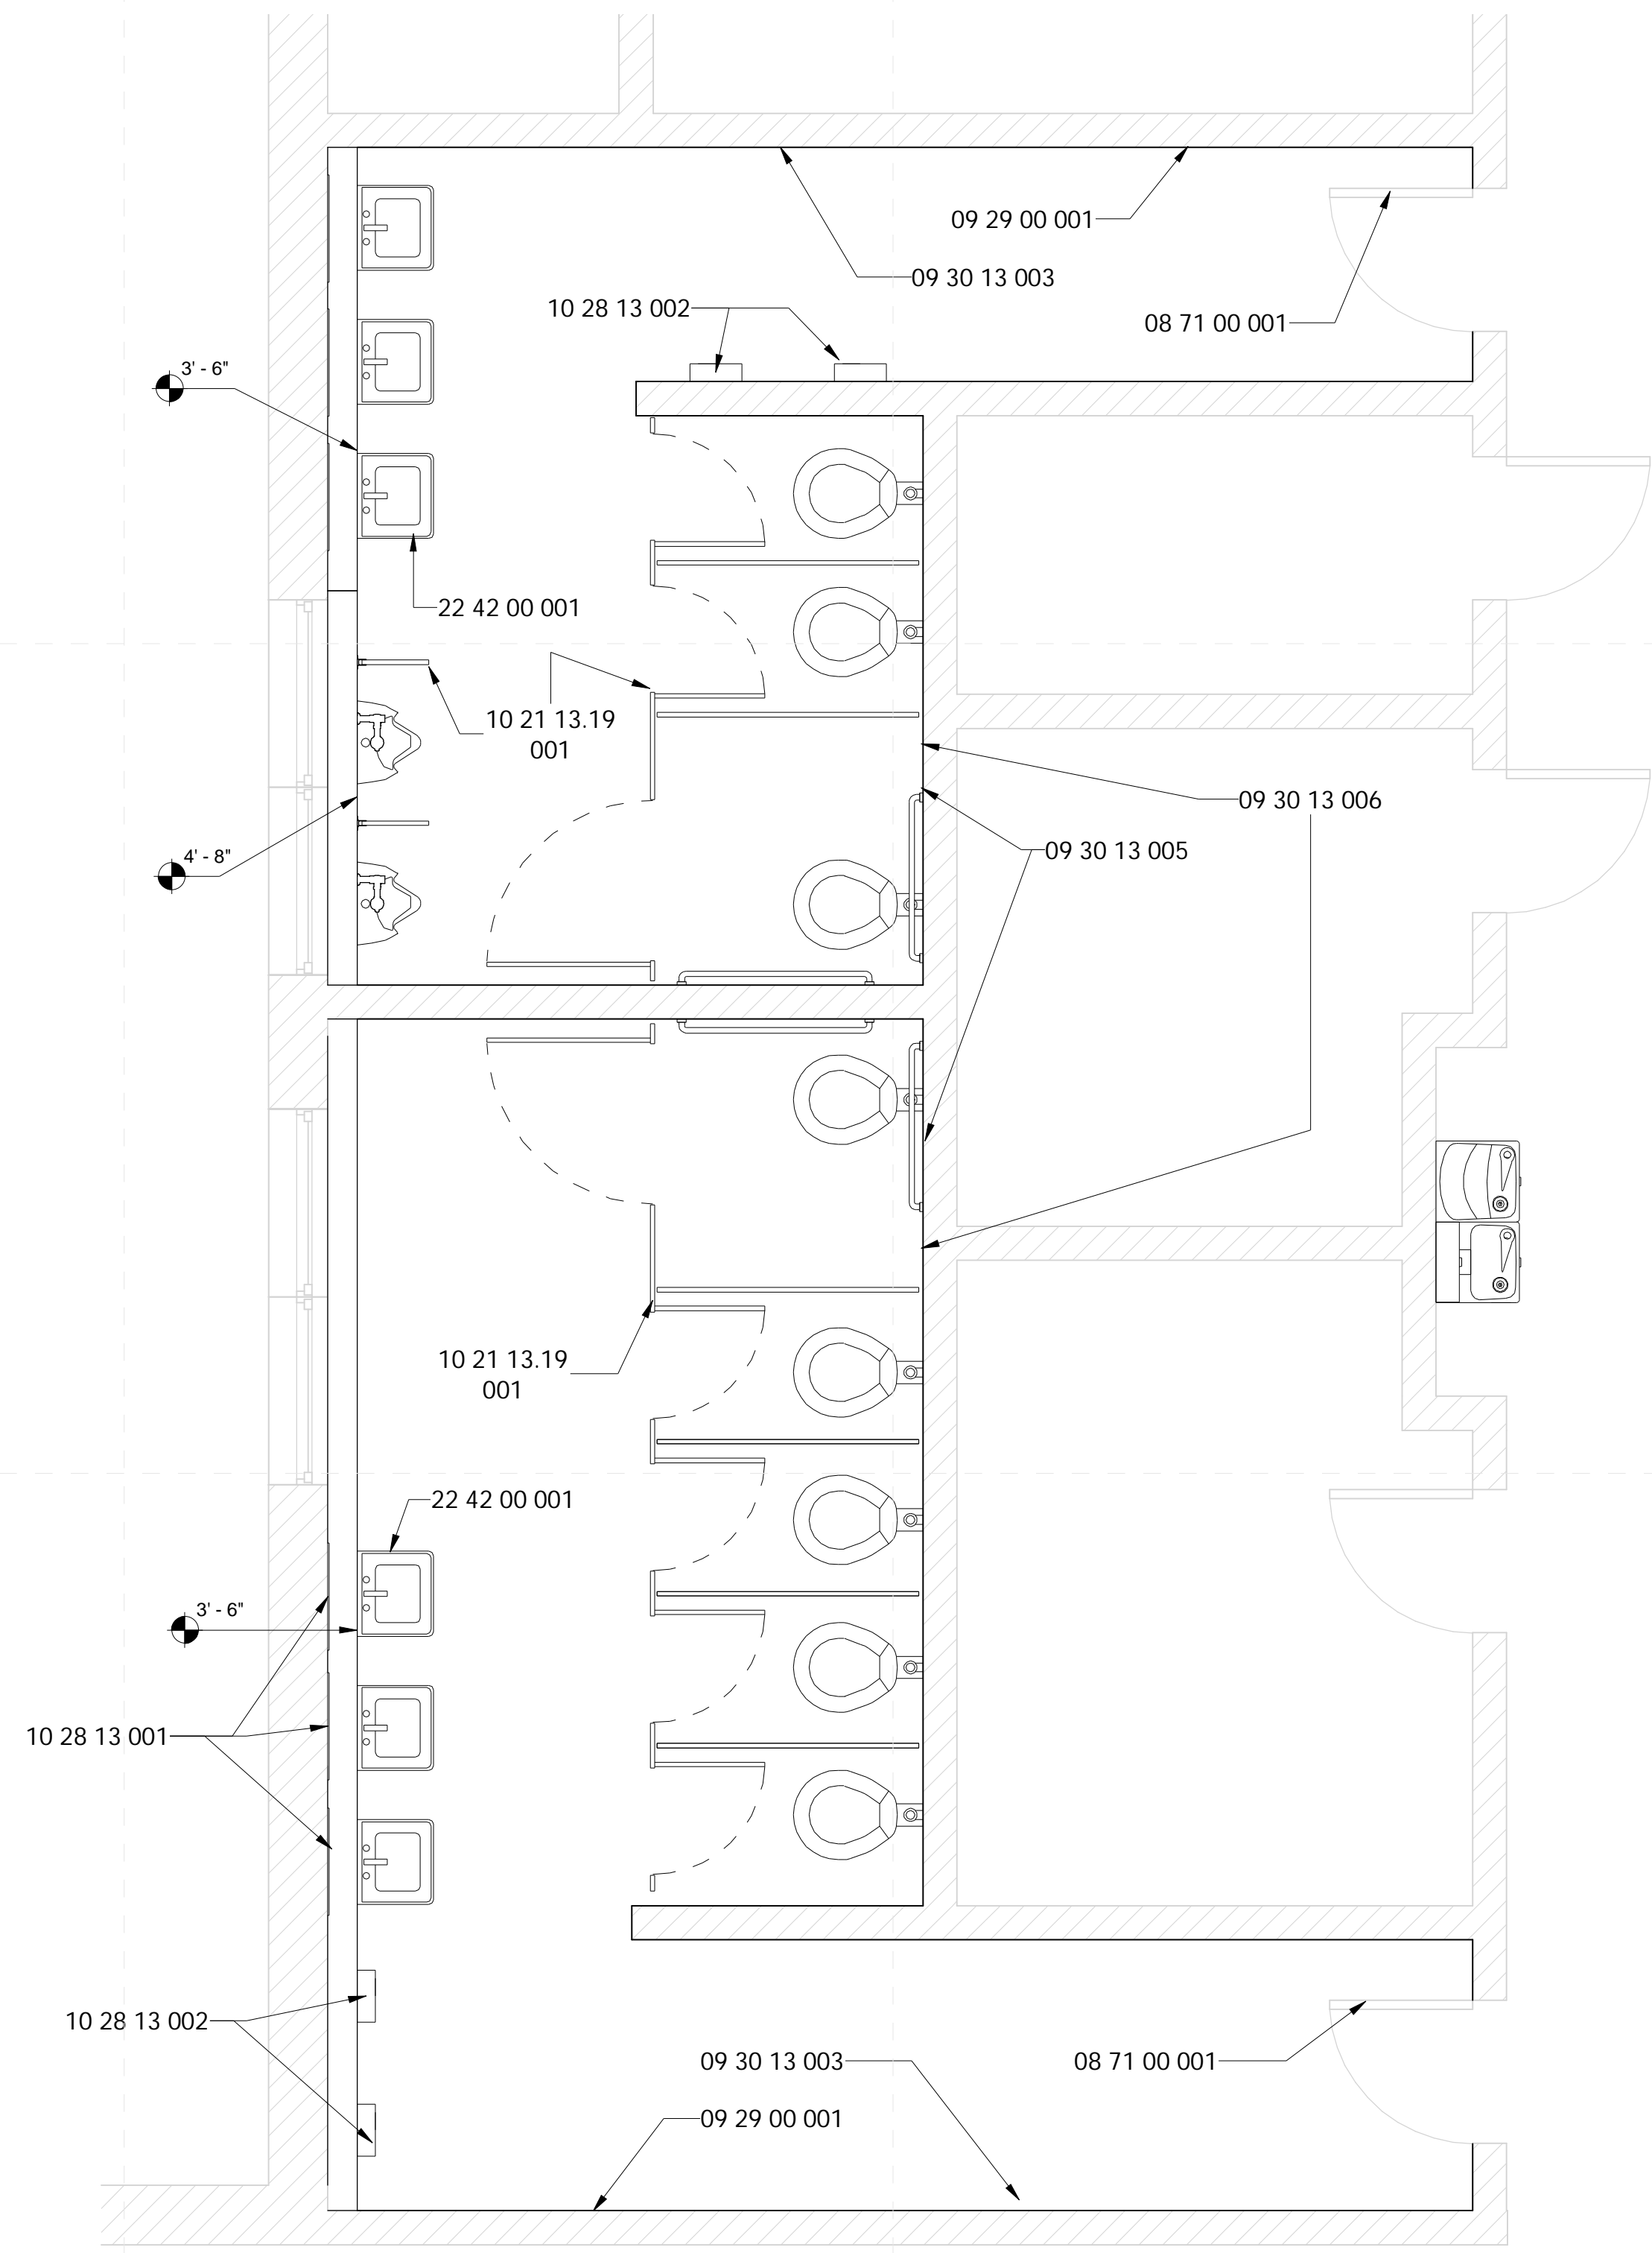

**2 South Toilets - New Construction**  
3/8" = 1'-0"

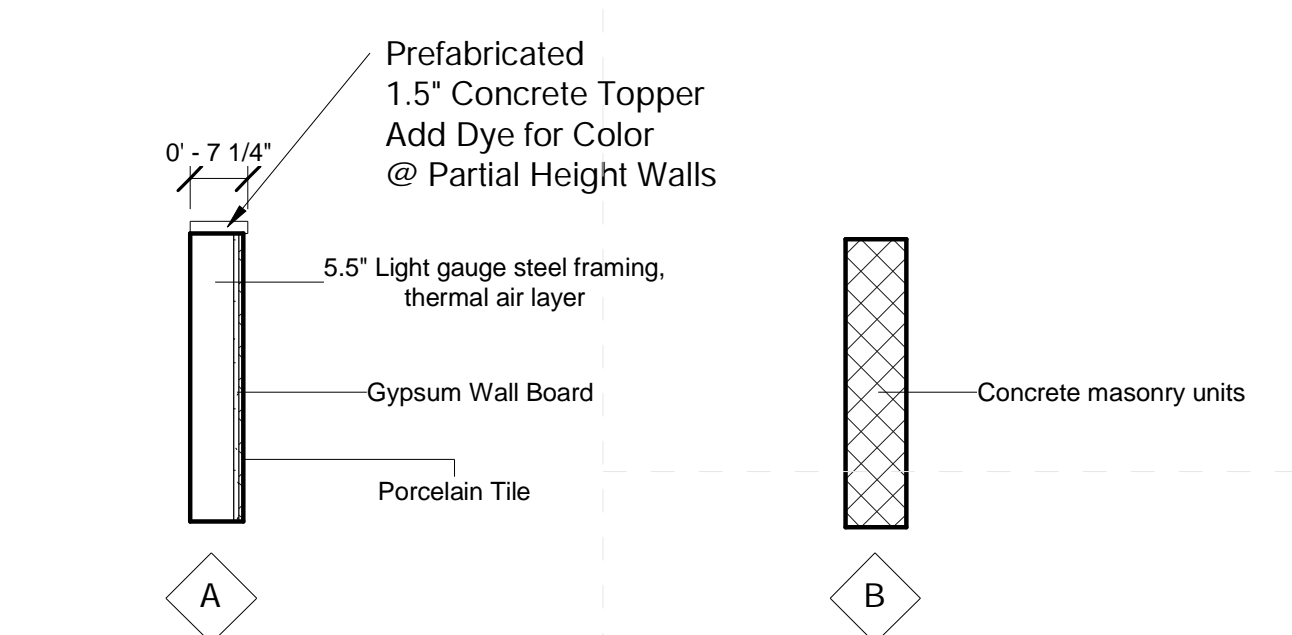

**Wall Types**  
1/2" = 1'-0"