

Not For Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic Design

Project No 00000
Date Issue Date
Revisions Rev Date

A-041


Existing Ceiling Plan

General RCP Demolition Notes

- Where ceiling transitions from new ceiling to existing ceiling, coordinate with Architect detail.
- Remove all existing ceiling grid & tile unless noted otherwise, as well as any wall fasteners and/or mastics attached therein where shown to be replaced by new materials.
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.
- No work in rooms with ceiling open to the structure above, unless noted otherwise.

Ceiling Legend

- Moisture Resistant Acoustical Lay In Ceiling
- Colored Acoustical Lay In Ceiling
- Vinyl Faced Acoustical Lay In Ceiling
- Gypsum Board Ceiling
- 2x2 Acoustical Lay In Ceiling
- Plaster/Stucco
- Concealed Fastener Painted Metal Soffit
- 2x2 Fluorescent Fixture
- Surface-Mounted Fluorescent Light Fixture
- Recessed Can Light Fixture
- HVAC Supply Grille
- HVAC Return Grille
- Exterior Wall Light
- Interior Wall Light
- Open to Structure (OTS)

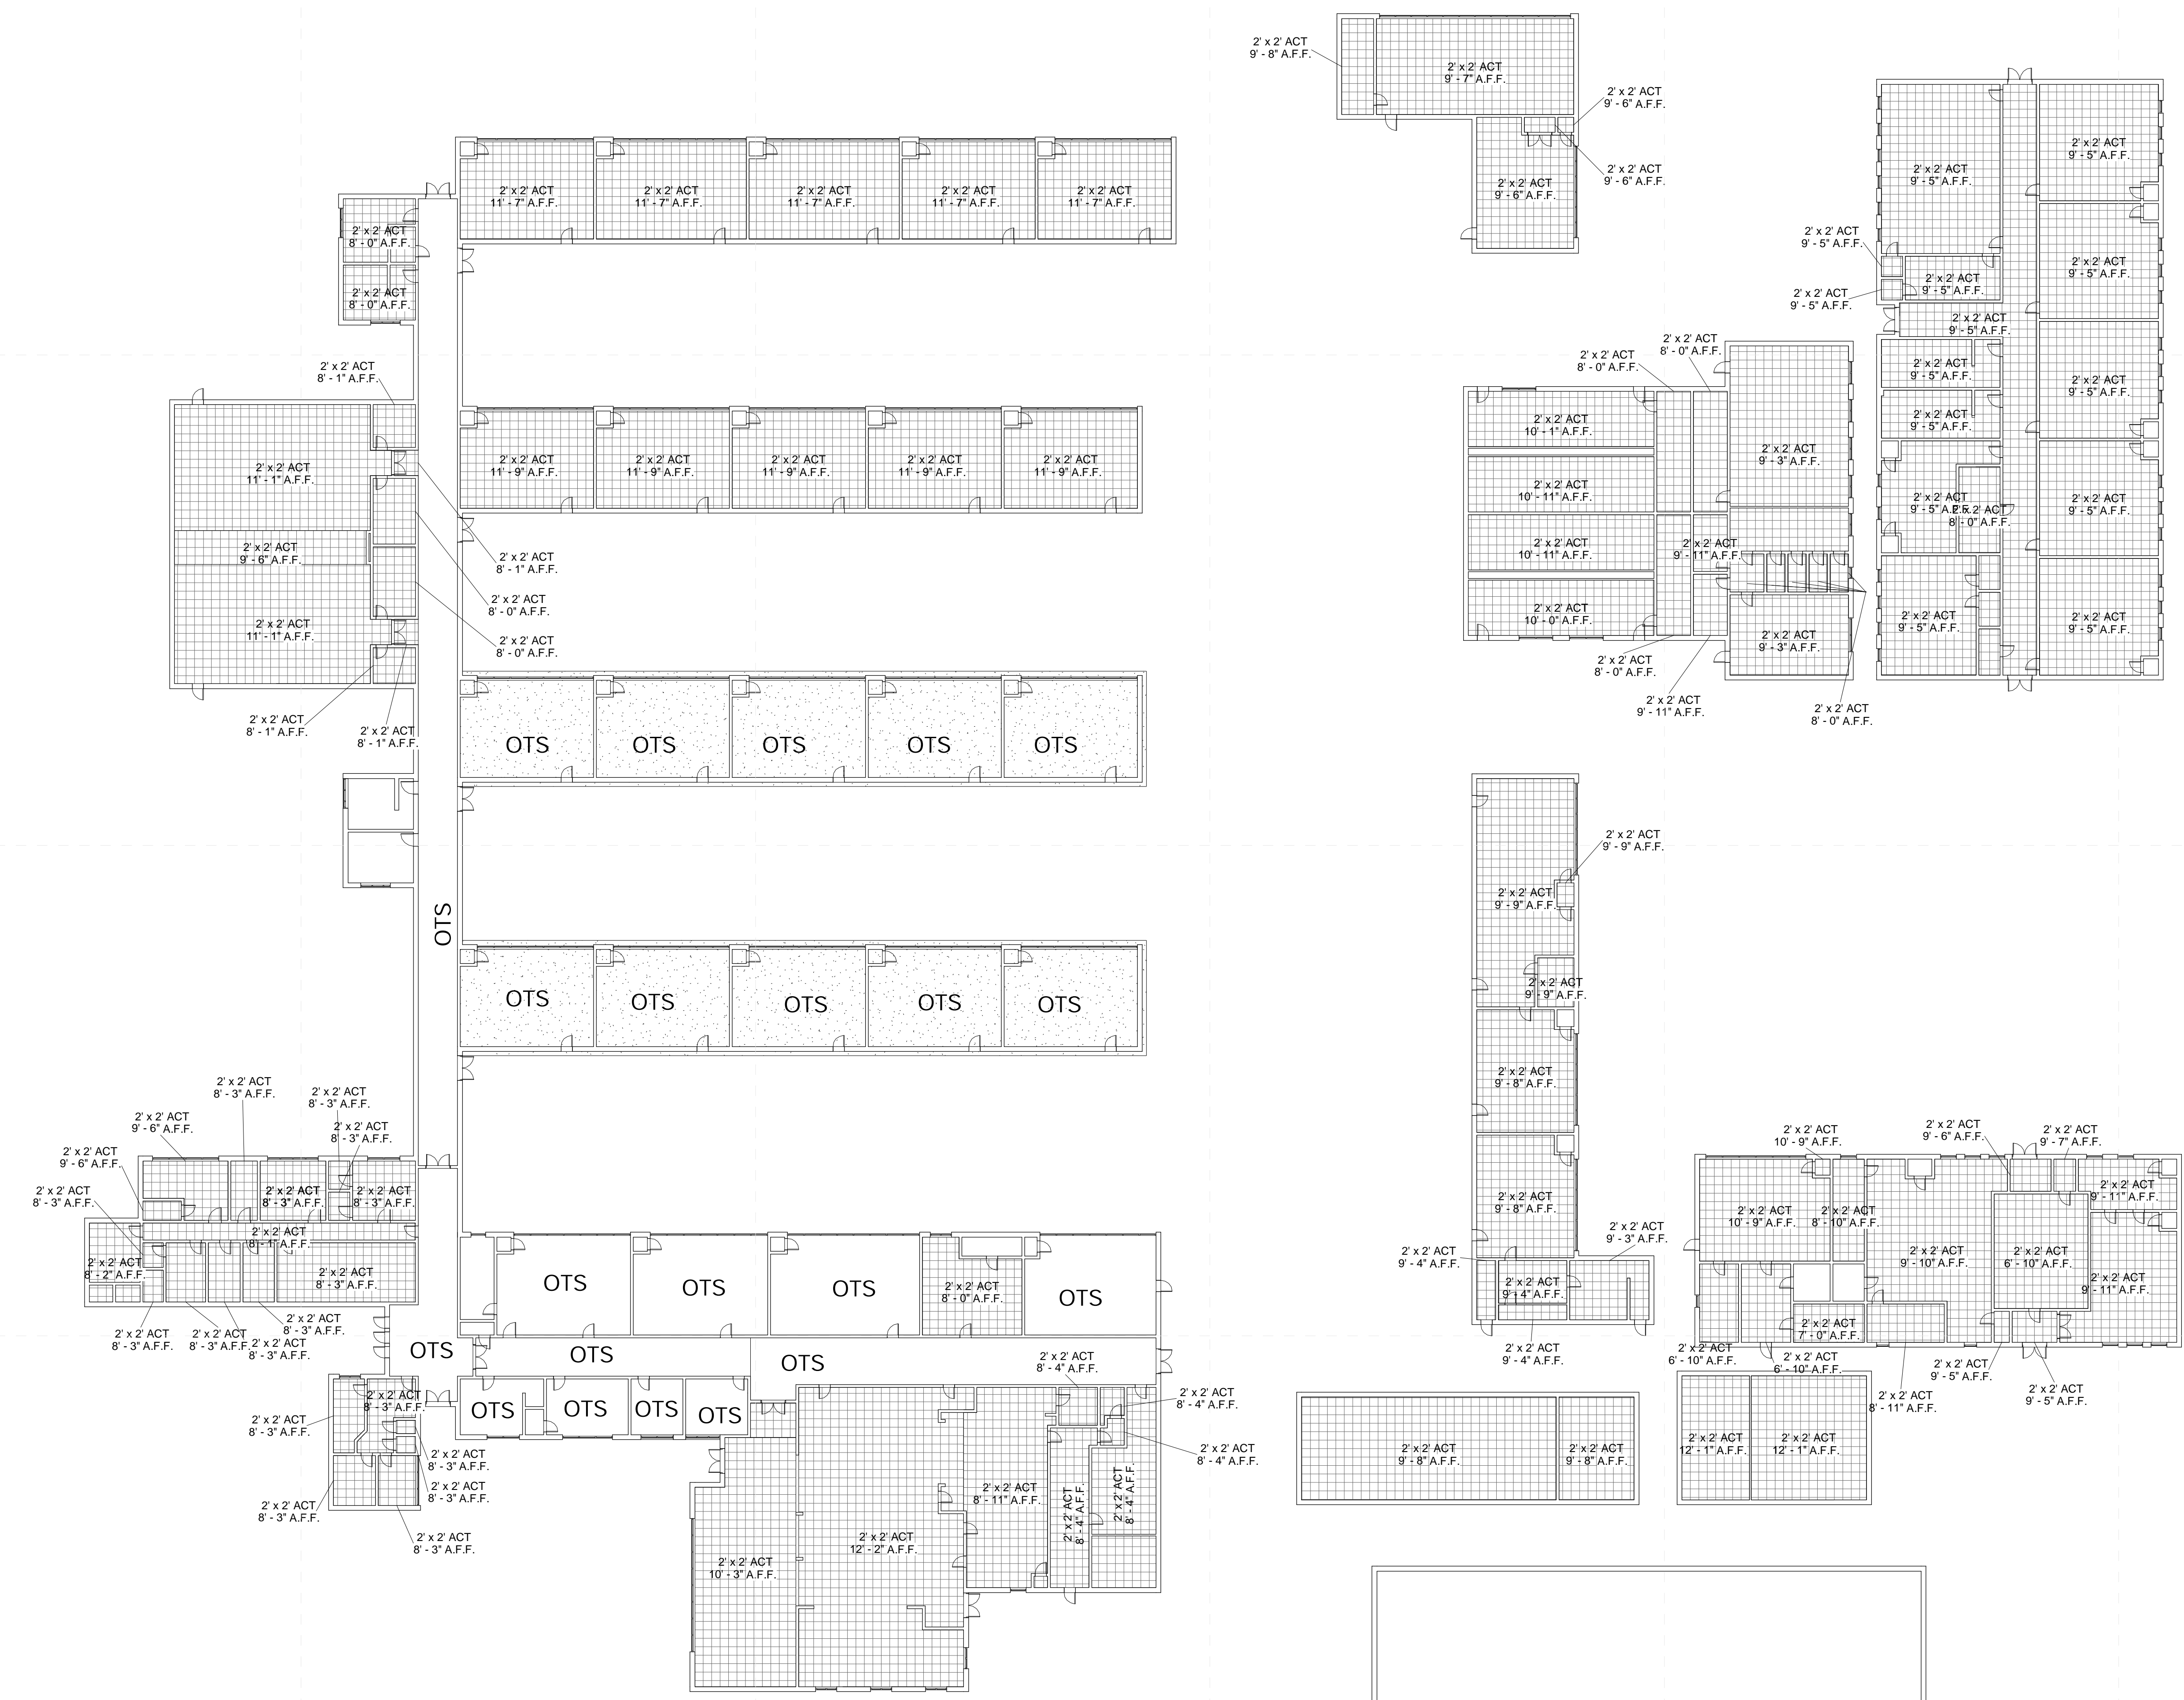

Not in Contract

**Not For
Construction**


Gentry High School Renovations
801 B B King Rd. Indianola, MS 38751

Schematic
Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

A-101

New Floor Plan

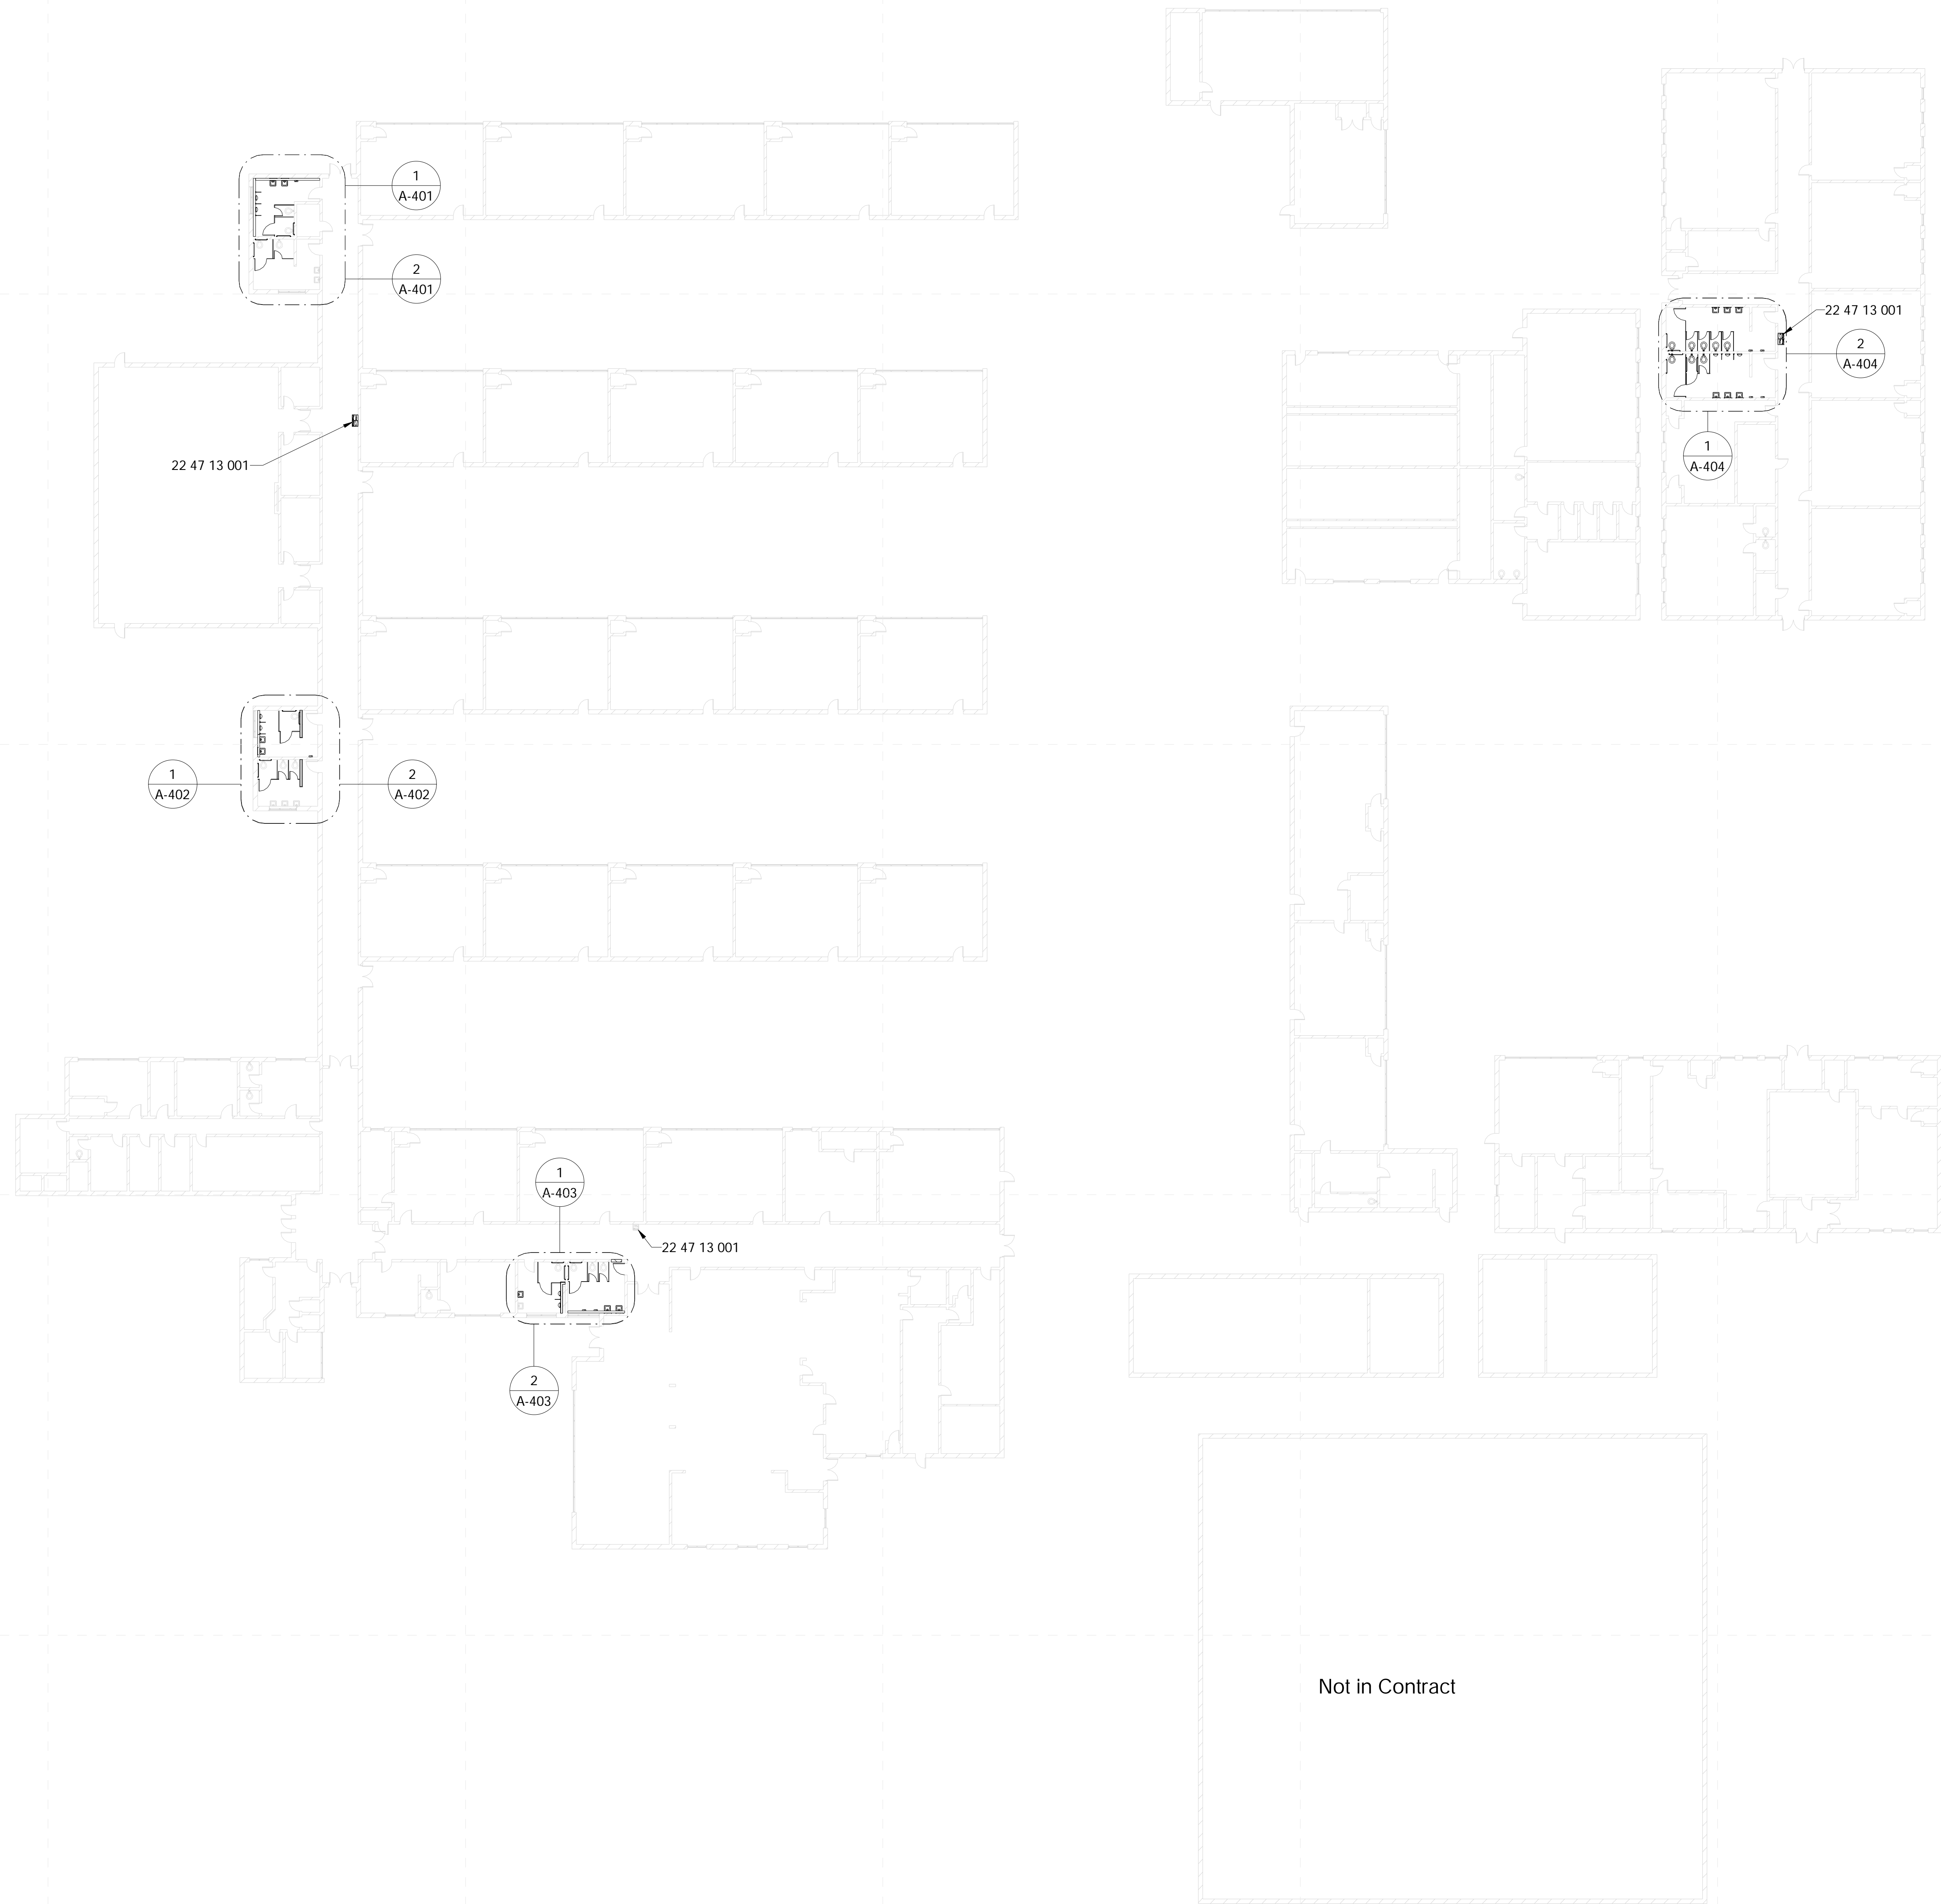

Specific Notes

22 47 13 001 Install double drinking fountain here; coordinate with mechanical & electrical drawings
















1 Composite Floor Plan
1" = 20'-0"

**Not For
Construction**

Gentry High School Renovations
 801 B King Rd. Indianola, MS 38751

Schematic
Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

- Ceiling Legend**
-  Moisture Resistant Acoustical Lay In Ceiling
 -  Colored Acoustical Lay In Ceiling
 -  Vinyl Faced Acoustical Lay In Ceiling
 -  Gypsum Board Ceiling
 -  2x2 Acoustical Lay In Ceiling
 -  Plaster/Stucco
 -  Concealed Fastender Painted Metal Soffit
 -  2x2 Fluorescent Fixture
 -  Surface-Mounted Fluorescent Light Fixture
 -  Recessed Can Light Fixture
 -  HVAC Supply Grille
 -  HVAC Return Grille
 -  Exterior Wall Light
 -  Interior Wall Light
 -  Open to Structure (OTS)



1 Composite Floor Plan
 1" = 20'-0"

10/5/2021 11:15:29 AM
 D:\my stuff\BUSINESS\work\2019\dale\Partners\21027-Sunflower County\models\21027 Gentry High School.rvt

Not For Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic Design
Project No 00000
Date Issue Date
Revisions Rev Date

A-401
North West Toilets

General Finish Plan Notes


1. All flooring transitions are to occur at center line of door panel.
2. New Fixture locations shall be coordinated with mechanical sheets.
3. Secure existing grab bars at all toilets.
4. Install moisture resistant back board at all new tile.
5. Patch/repair any damaged tile with matching.
6. Prep, Prime, & Paint all interior CMU at renovated toilets.
7. Remount existing toilet accessories to new partitions.

Specific Notes


02 41 19 002	Dashed lines indicated extent of demoed work
10 01 20 001	Relocate existins mirrors to here: center on fixture; coordinate with mechanical & electrical
10 21 13.19 001	Install new toilet partitions (typical)
10 28 13 002	Install hand dryer here: coordinate with electrical & mechanical
22 01 40 001	Relocate existing fixtures here: coordinate location with mechanical drawings

General Demolition Notes


1. Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
2. Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
3. Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
4. Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
5. Burying or Burning of materials will not be permitted on site.
6. Repair any damage caused to building construction identified to remain.
7. Refer to other discipline drawings for additional demolition information as noted
8. Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
9. Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
10. Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

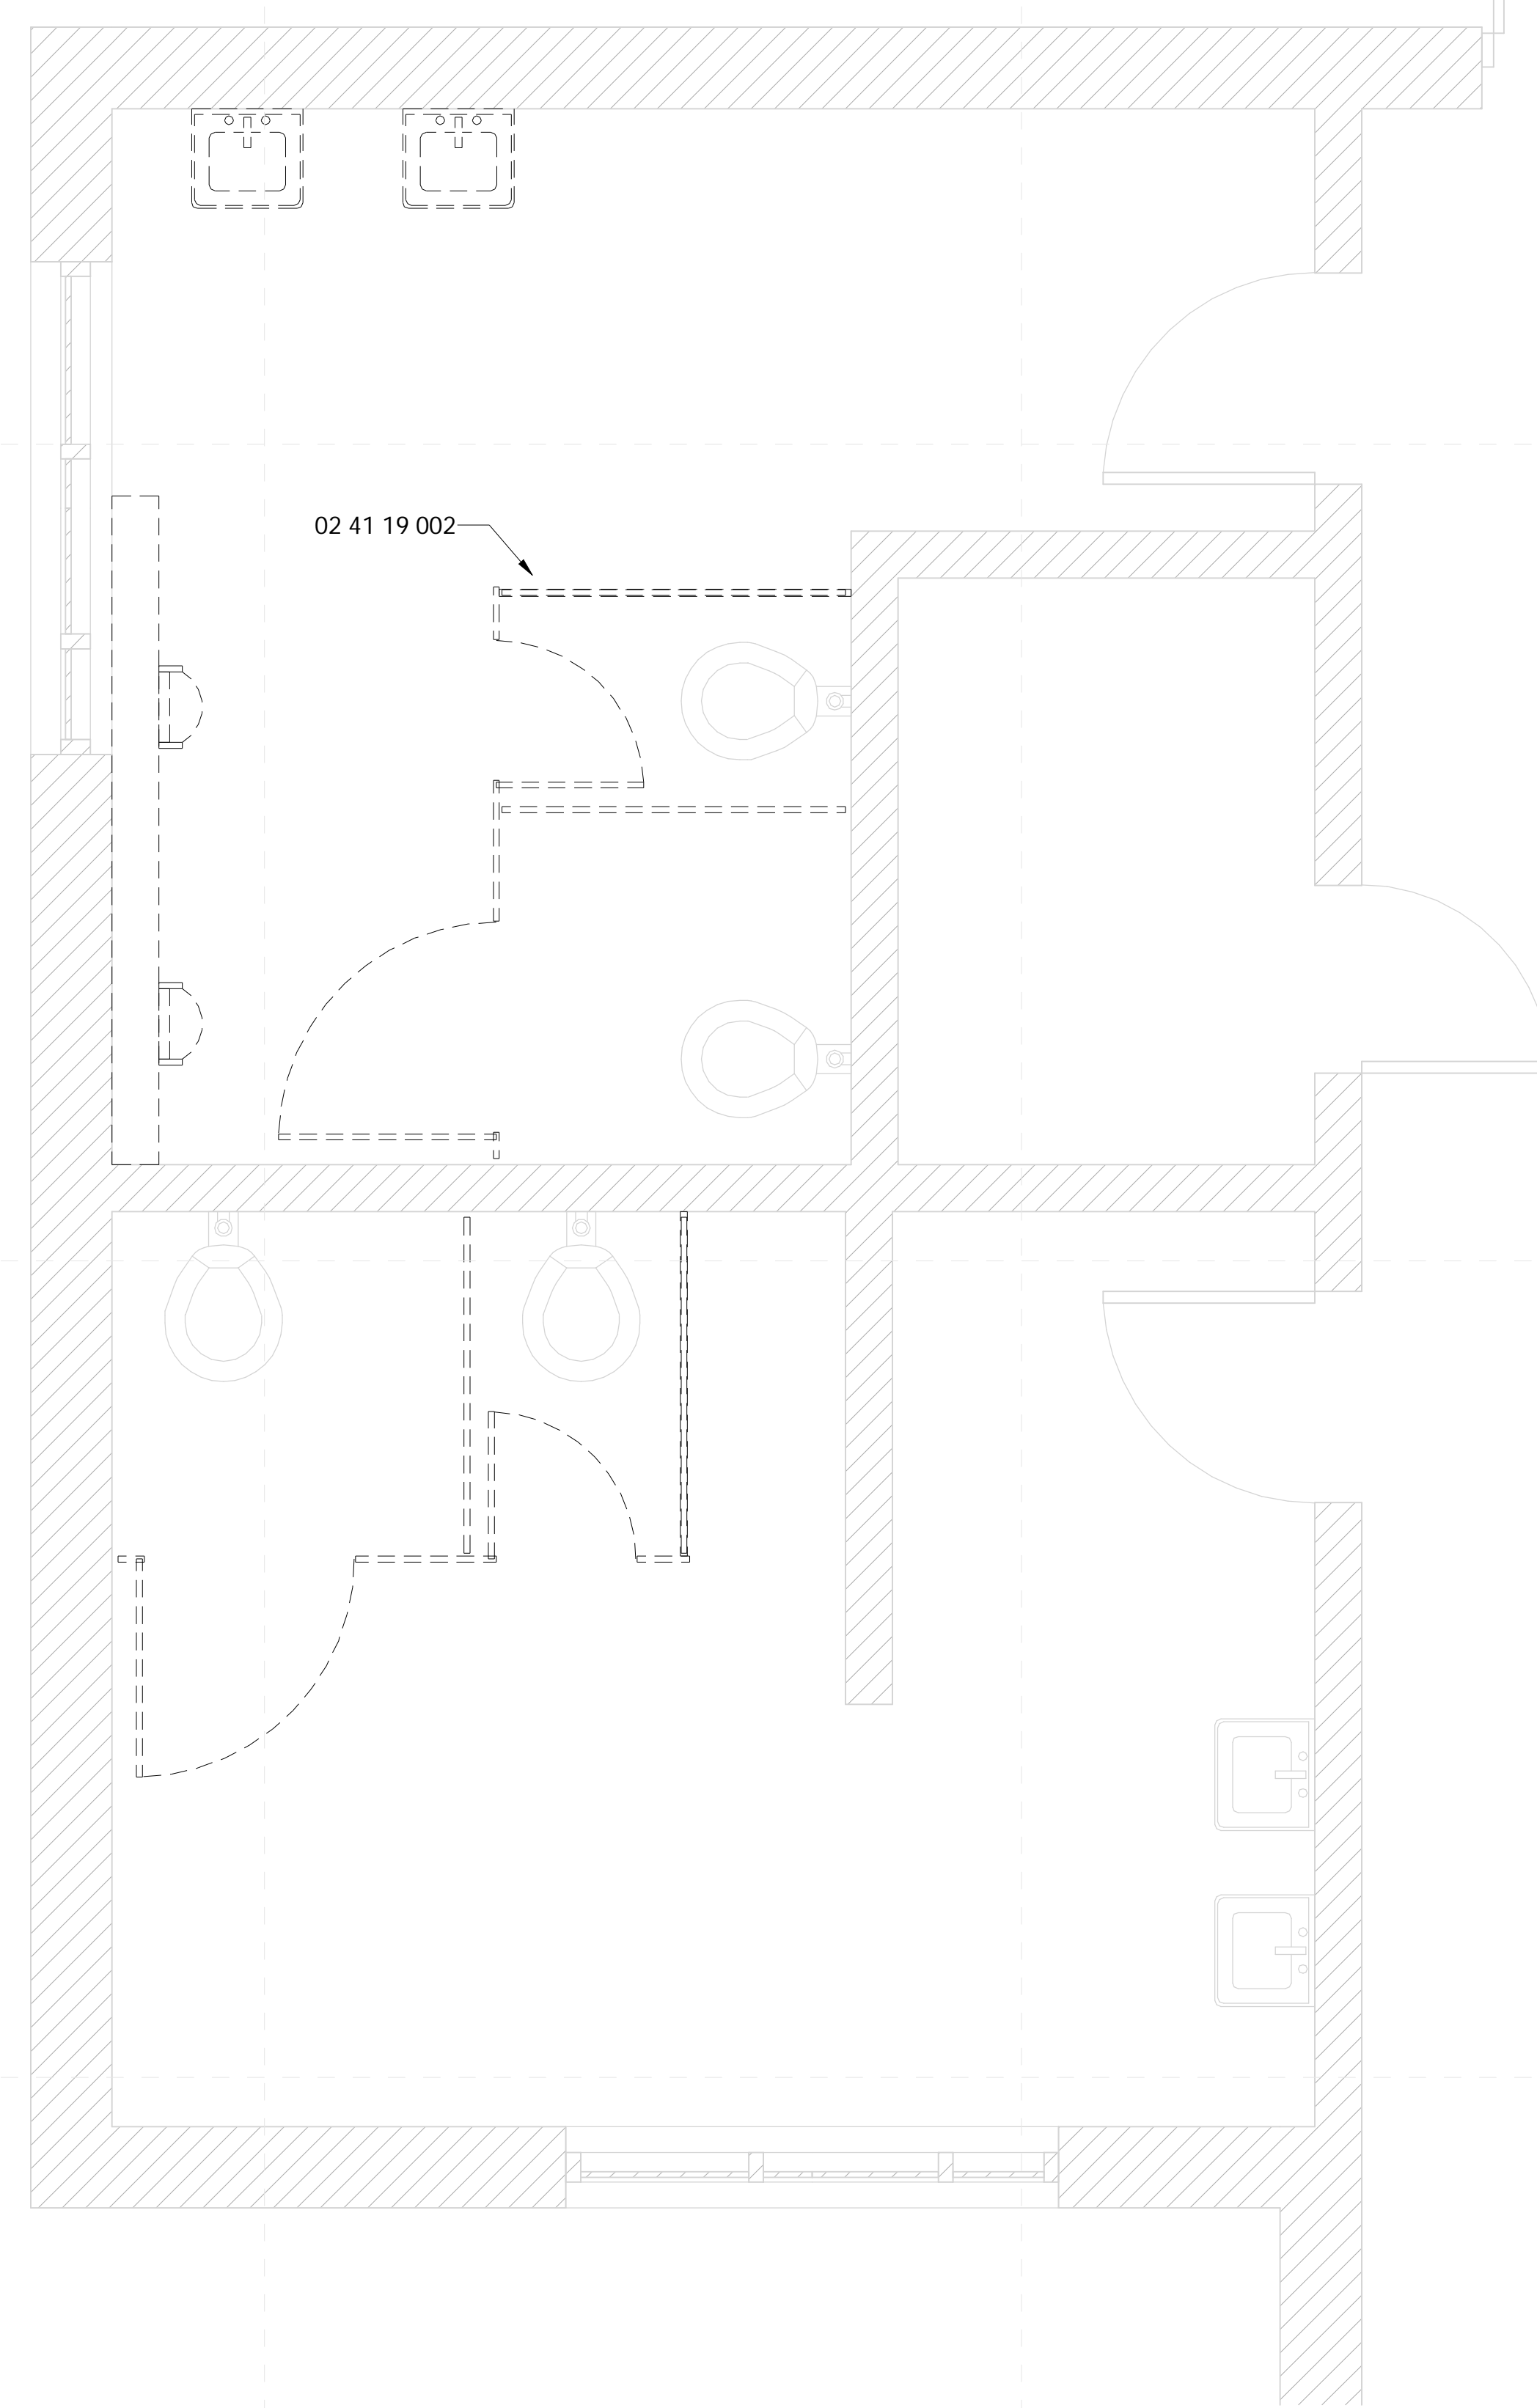

1 Toilets - North West - Demolition
1/2" = 1'-0"

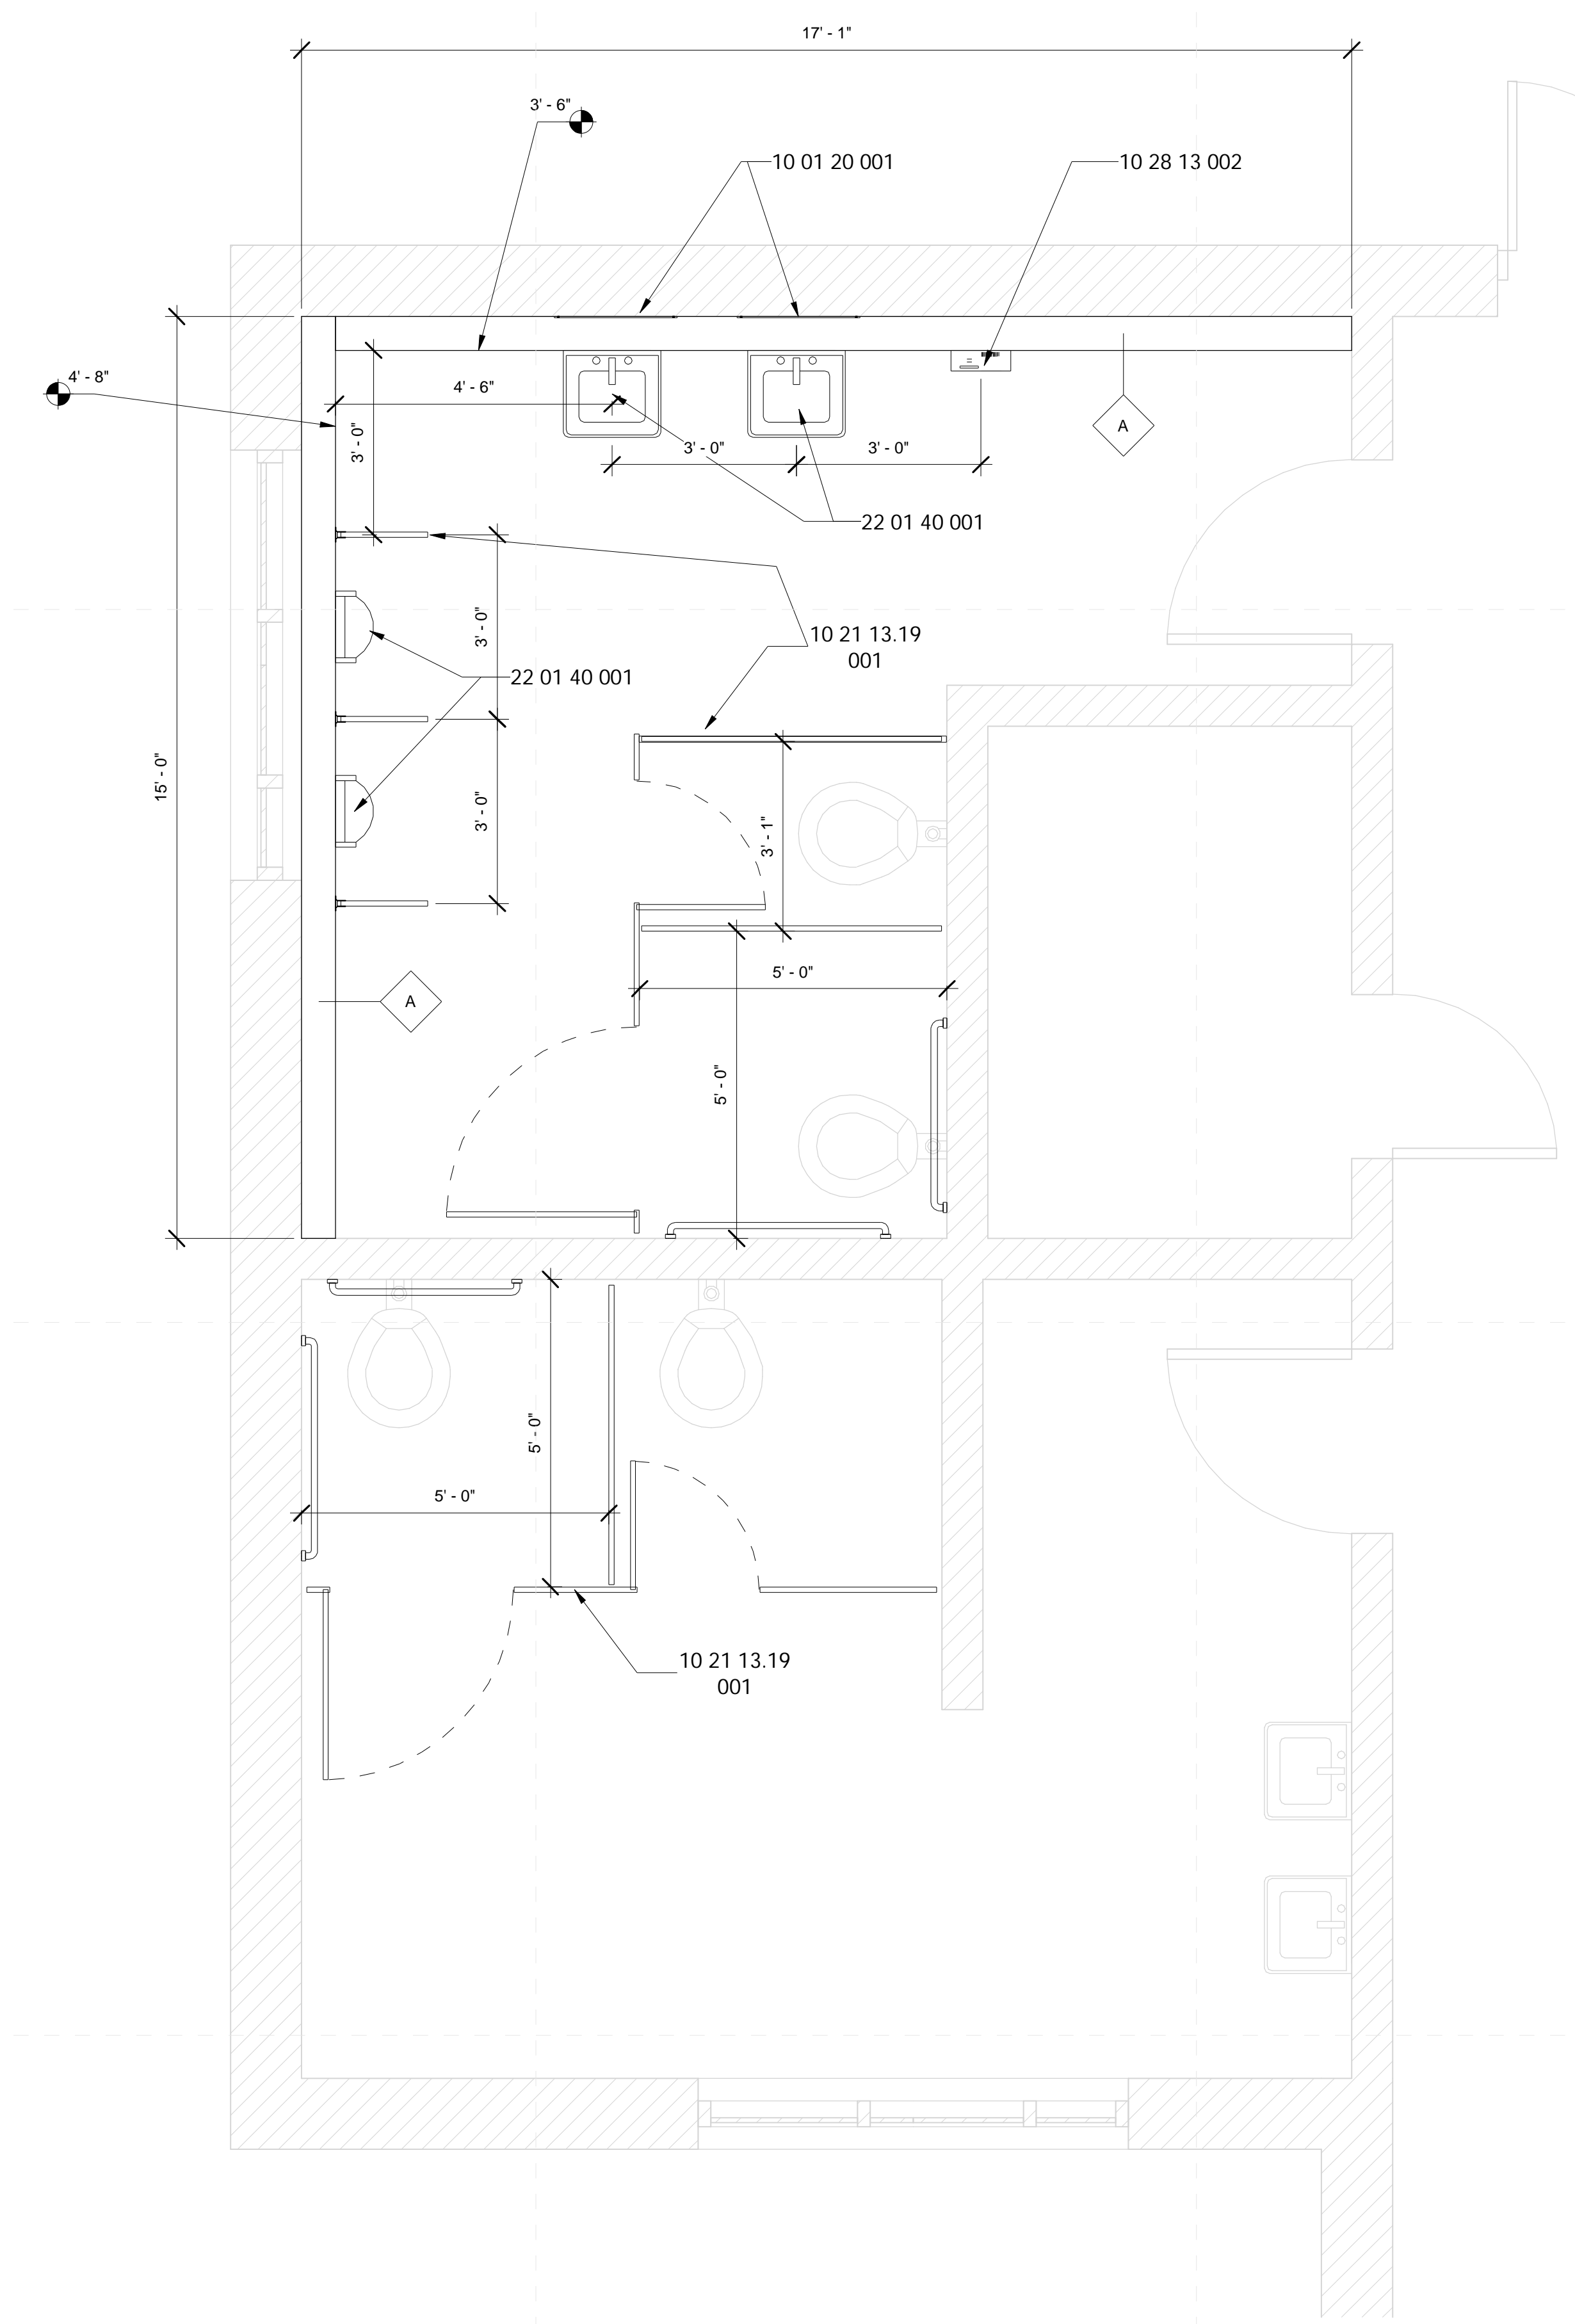

2 Toilets - North West - New Construction
1/2" = 1'-0"

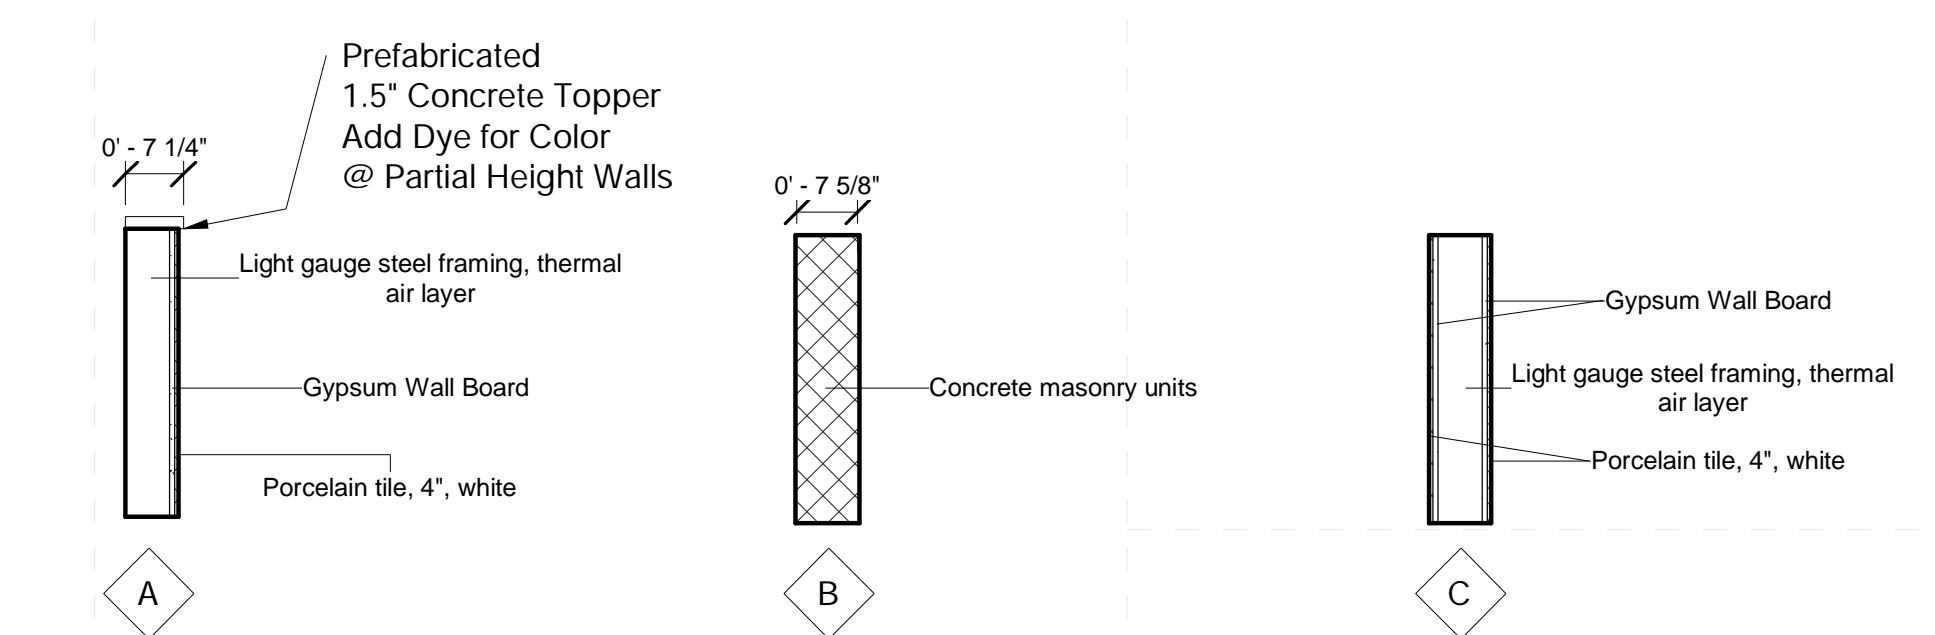

Wall Types
1/2" = 1'-0"

Not For Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

General Finish Plan Notes


- All flooring transitions are to occur at center line of door panel.
- New Fixture locations shall be coordinated with mechanical sheets.
- Secure existing grab bars at all toilets.
- Install moisture resistant back board at all new tile.
- Patch/repair any damaged tile with matching.
- Prep, Prime, & Paint all interior CMU at renovated toilets.
- Remount existing toilet accessories to new partitions.

Specific Notes


02 41 19 002	Dashed lines indicated extent of demoed work
09 30 13 003	Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise
10 01 20 001	Relocate existins mirrors to here; center on fixture; coordinate with mechanical & electrical
10 21 13.19 001	Install new toilet partitions (typical)
10 28 13 002	Install hand dryer here; coordinate with electrical & mechanical
22 01 40 001	Relocate existing fixtures here; coordinate location with mechanical drawings

General Demolition Notes


- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

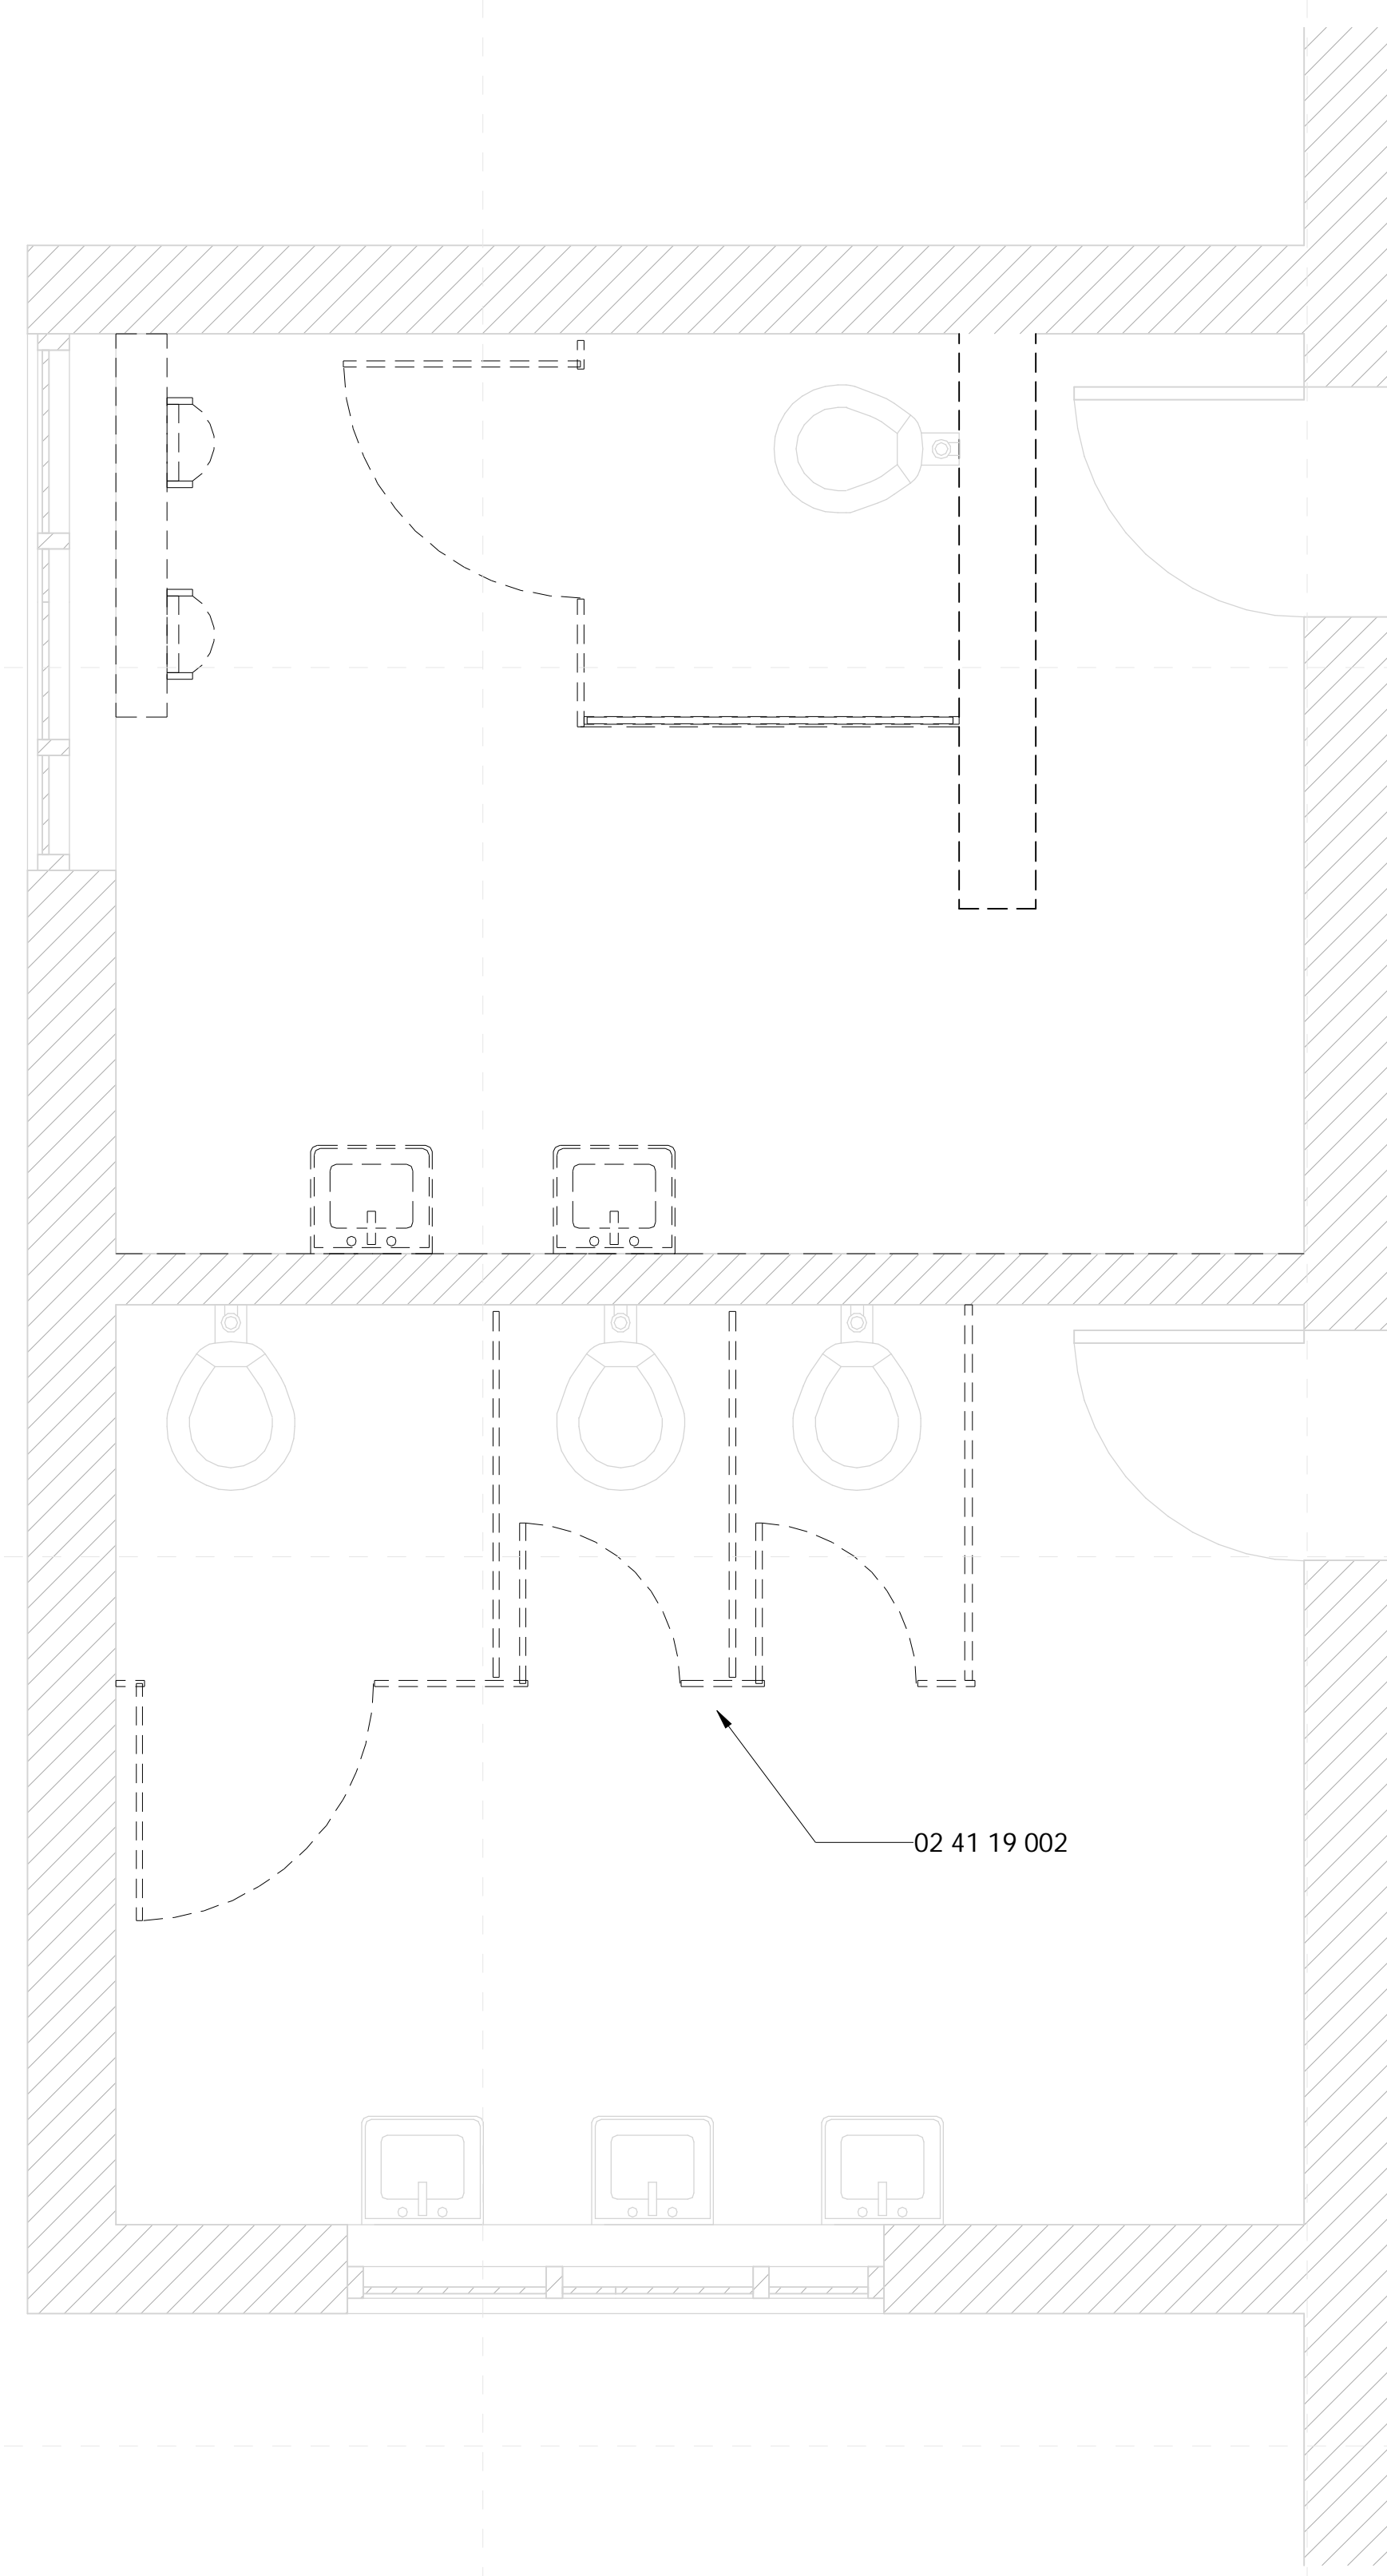

1 Toilets - Central West - Demolition
1/2" = 1'-0"

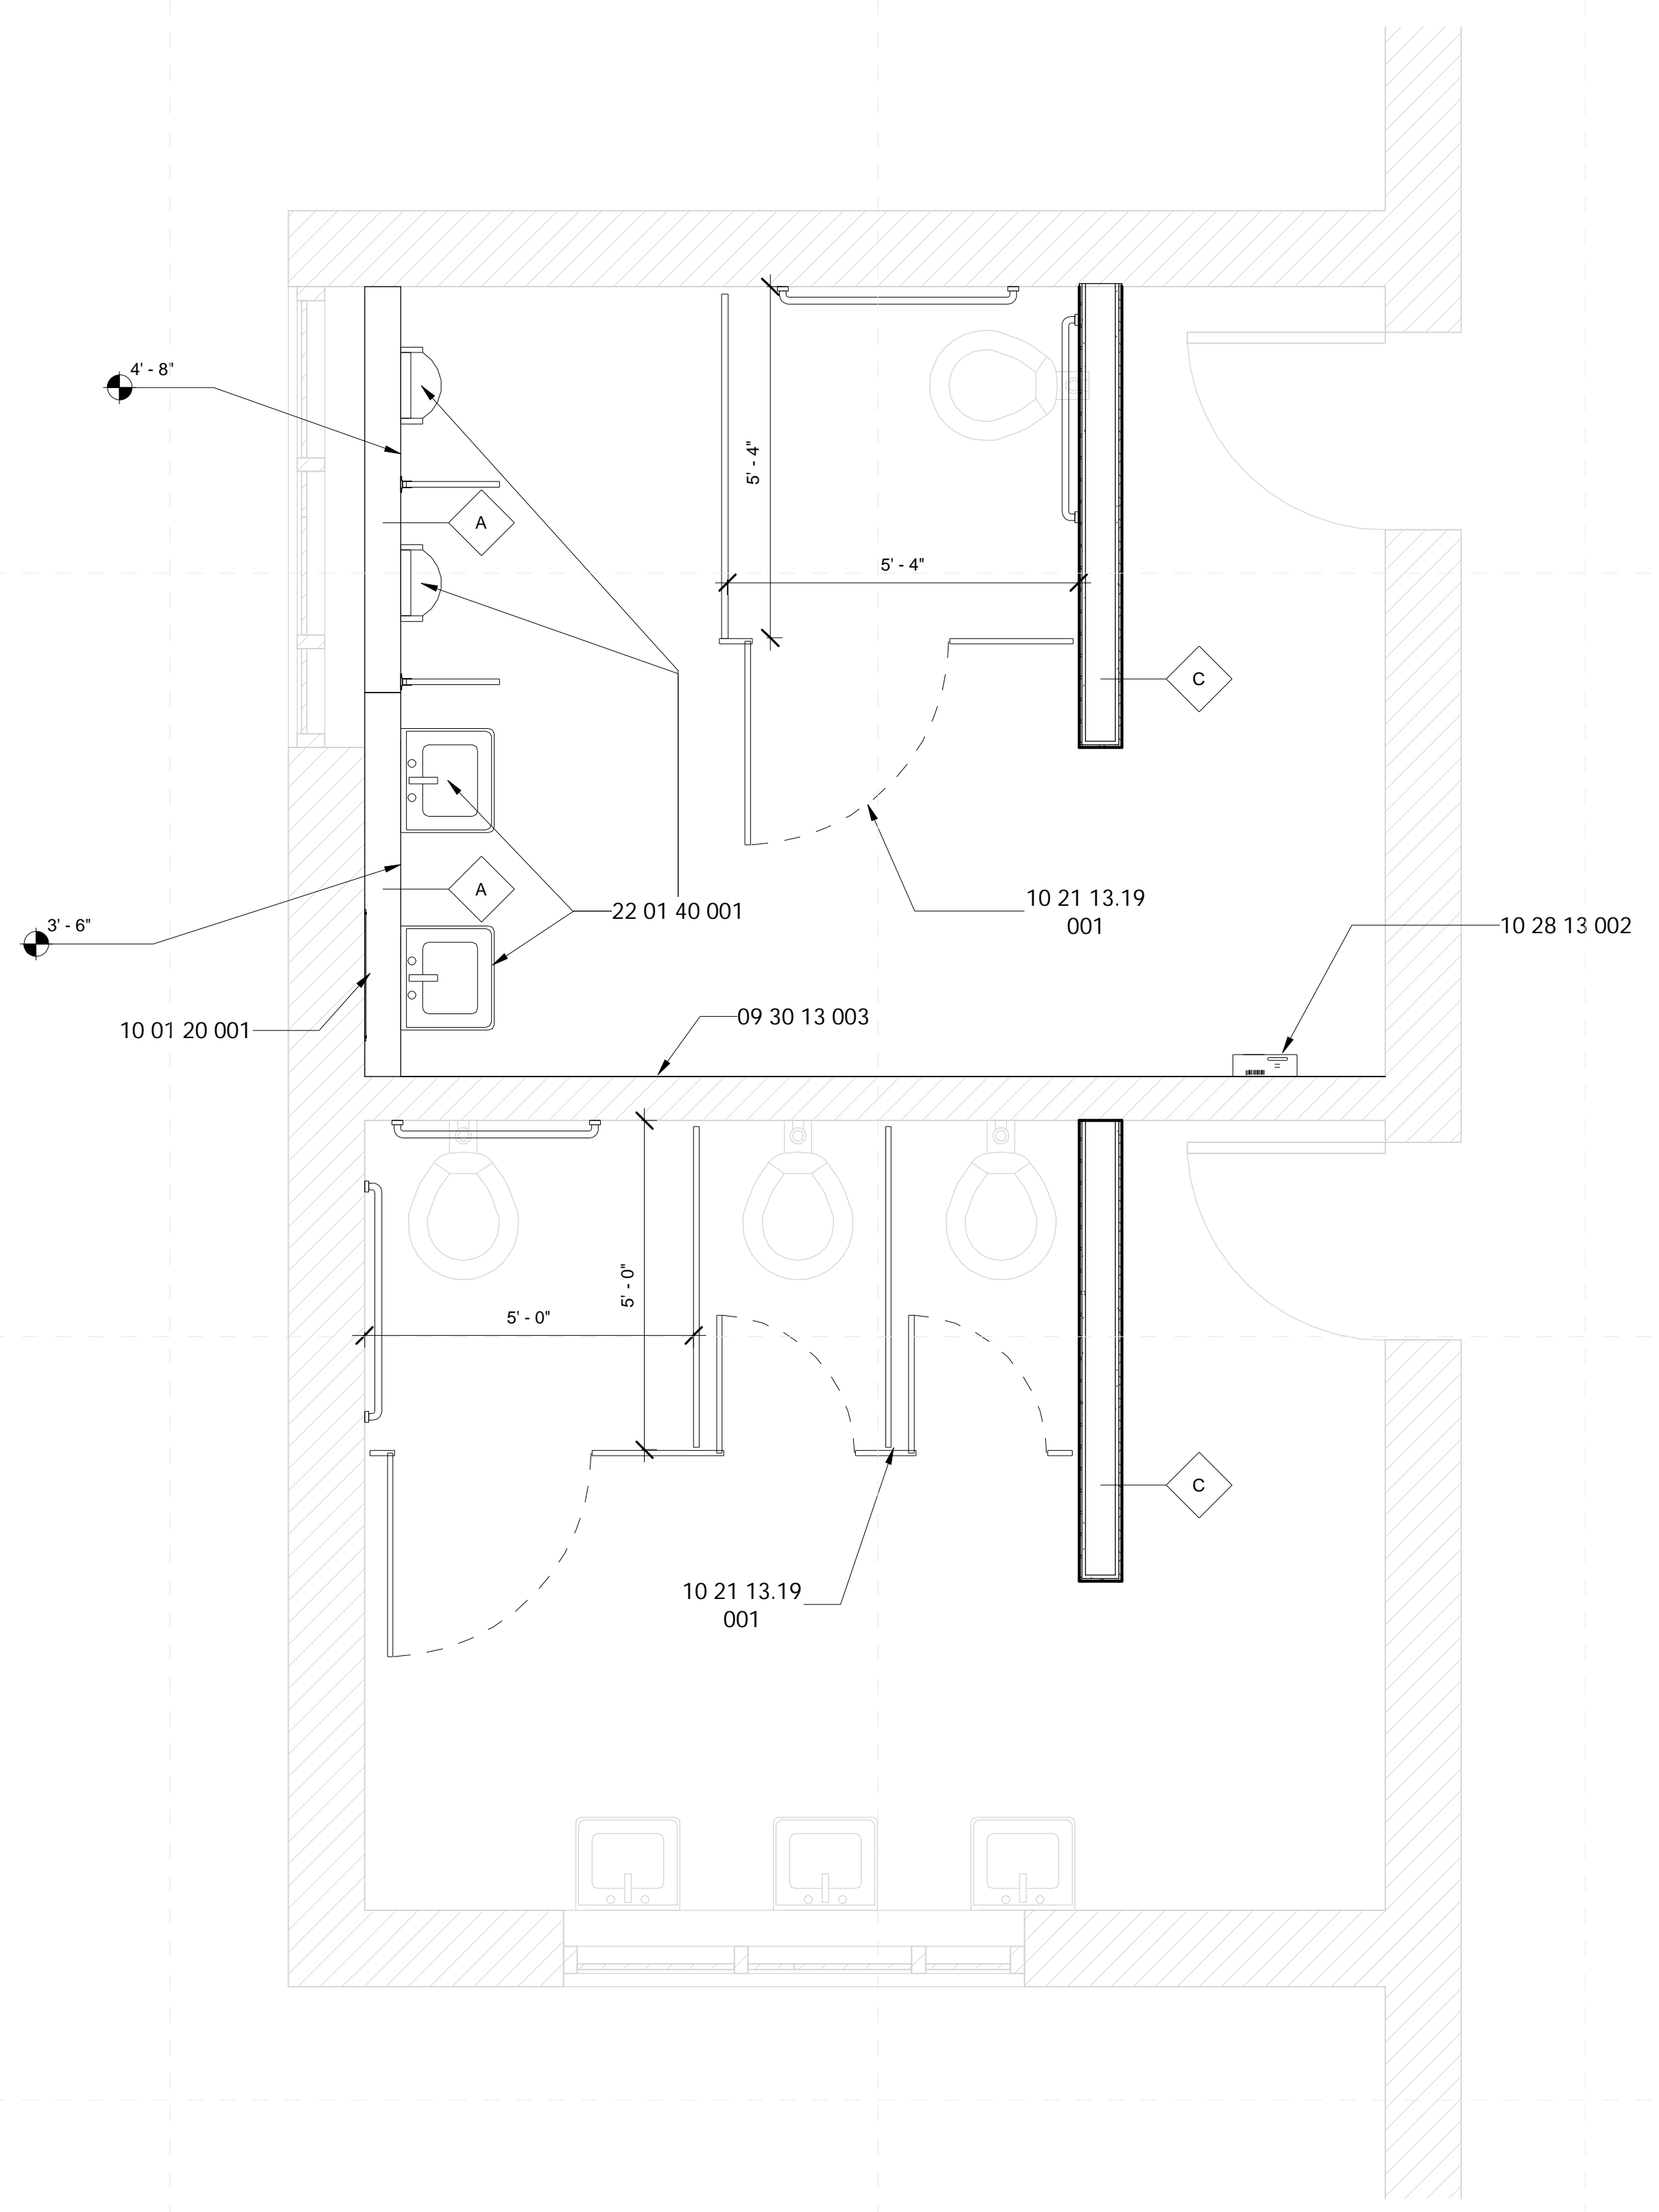

2 Toilets - Central West - New Construction
1/2" = 1'-0"

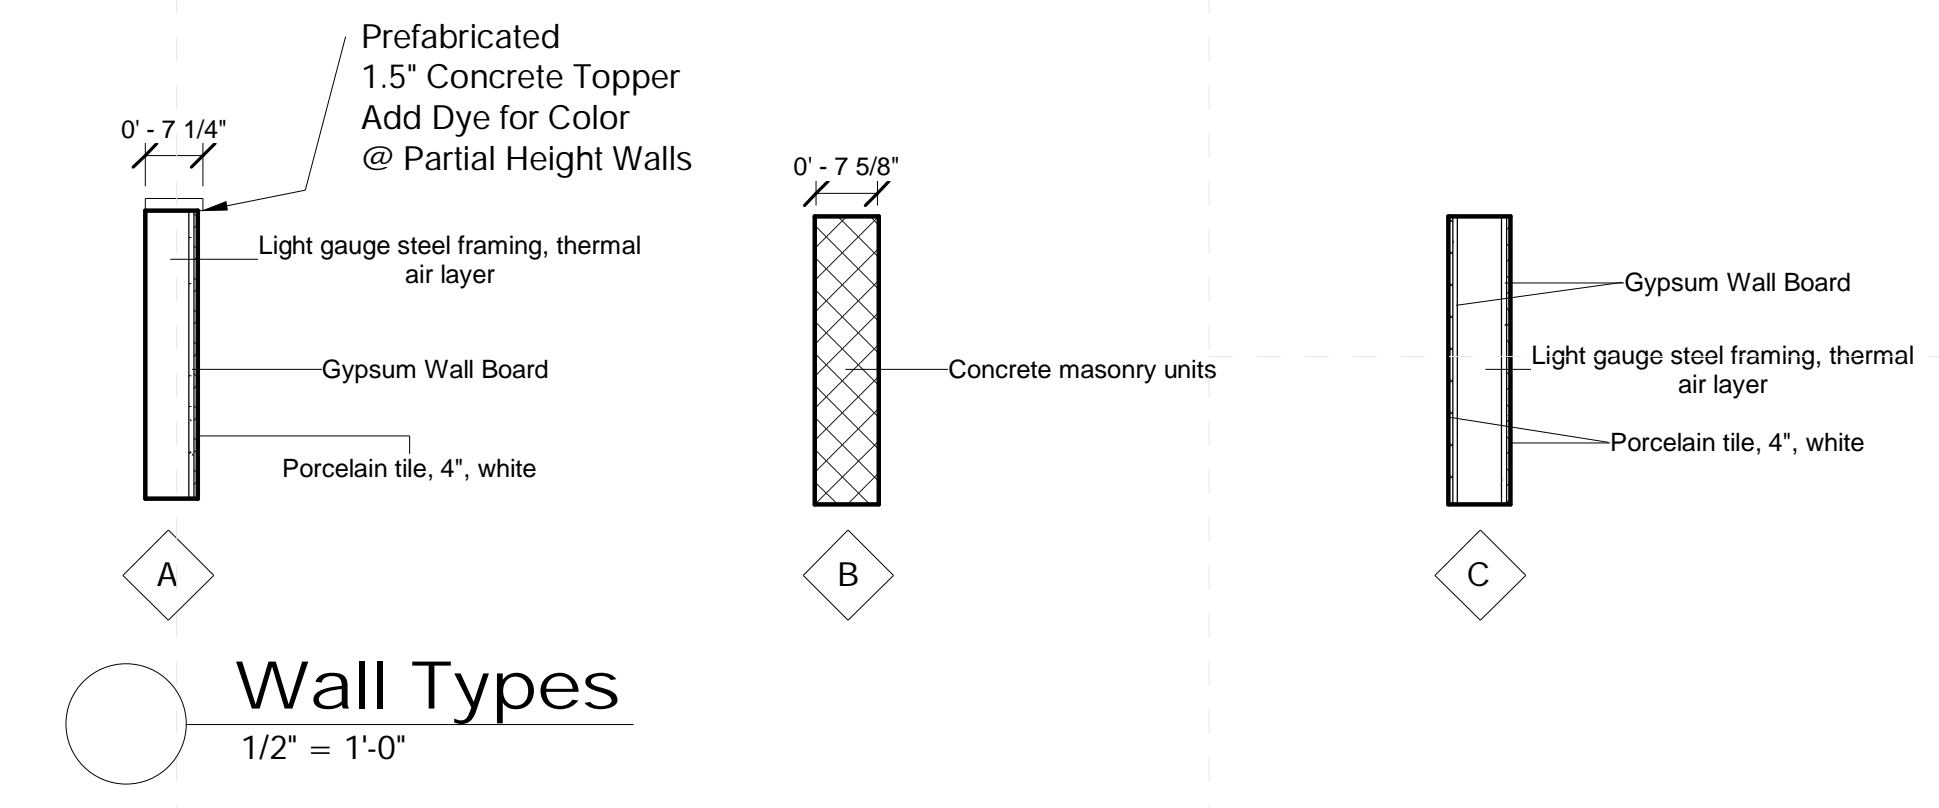

Wall Types
1/2" = 1'-0"



General Finish Plan Notes


- All flooring transitions are to occur at center line of door panel.
- New Fixture locations shall be coordinated with mechanical sheets.
- Secure existing grab bars at all toilets.
- Install moisture resistant back board at all new tile.
- Patch/repair any damaged tile with matching.
- Prep, Prime, & Paint all interior CMU at renovated toilets.
- Remount existing toilet accessories to new partitions.

Specific Notes


02 41 19 002	Dashed lines indicated extent of demoed work
08 11 13 002	Install new 36" HM Door and Frame with new hardware
10 21 13.19 001	Install new toilet partitions (typical)
10 28 13 001	Install wall hung mirror here: center over fixture unless noted otherwise
10 28 13 002	Install hand dryer here: coordinate with electrical & mechanical
22 01 40 001	Relocate existing fixtures here: coordinate location with mechanical drawings
22 42 00 001	Coordinate new fixture installations with mechanical, typical for new

General Demolition Notes


- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule. Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted.
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

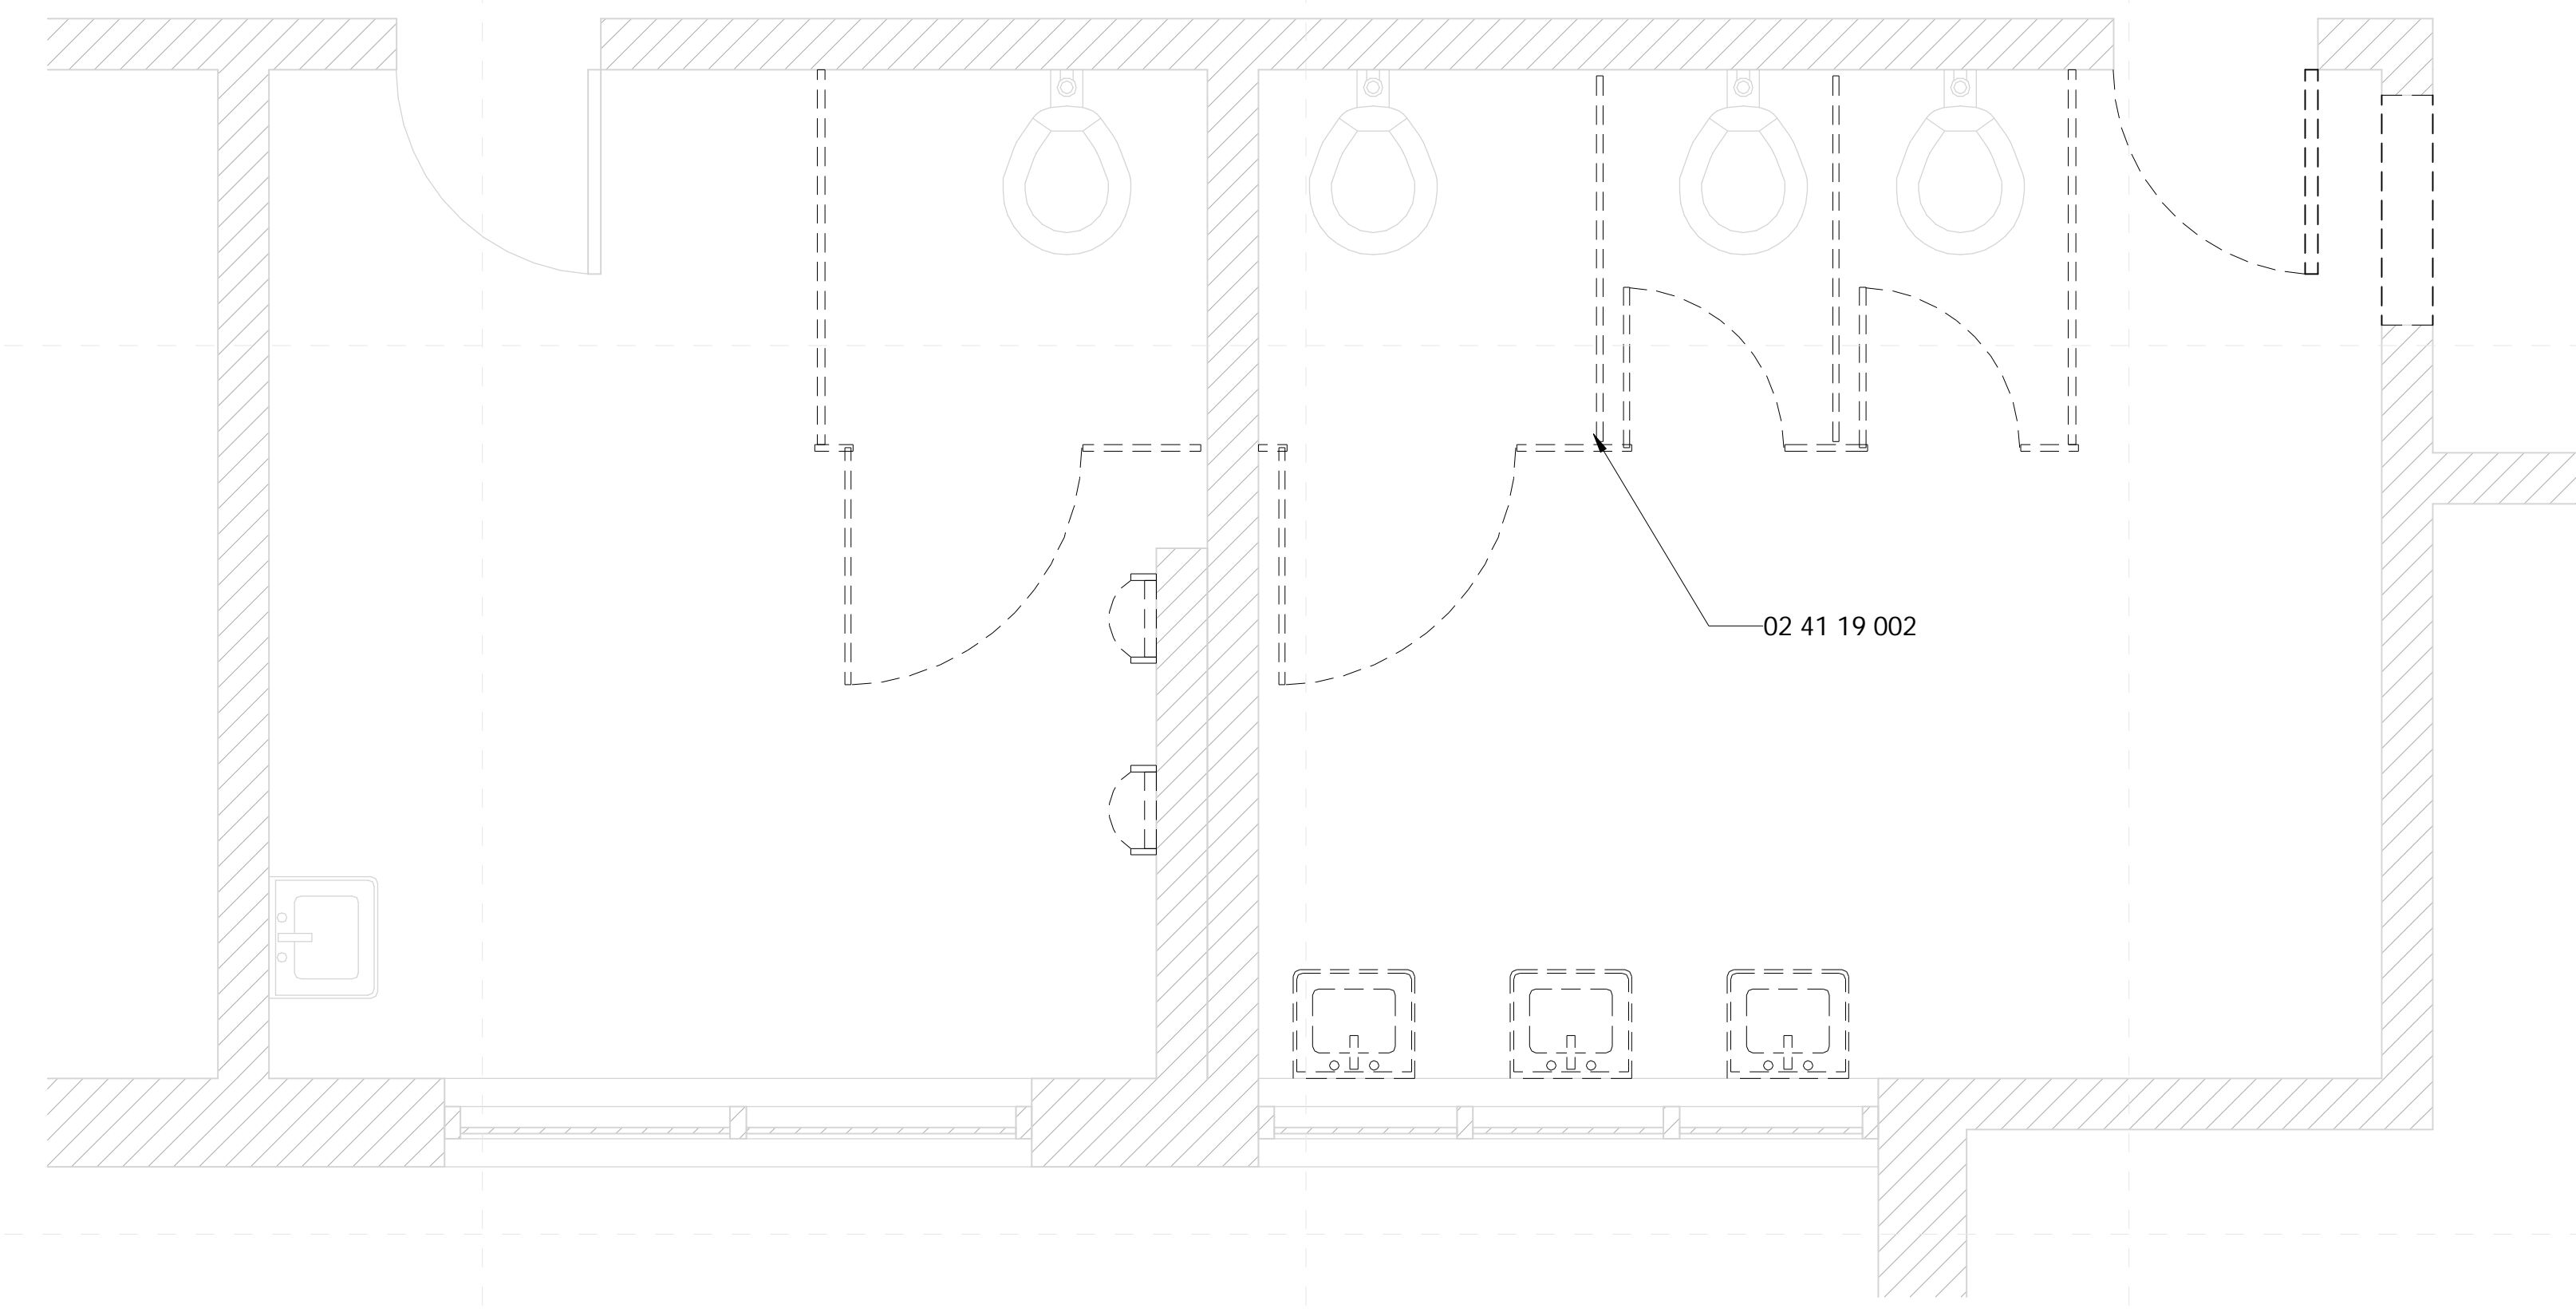


1 Toilets - South - Demolition
1/2" = 1'-0"

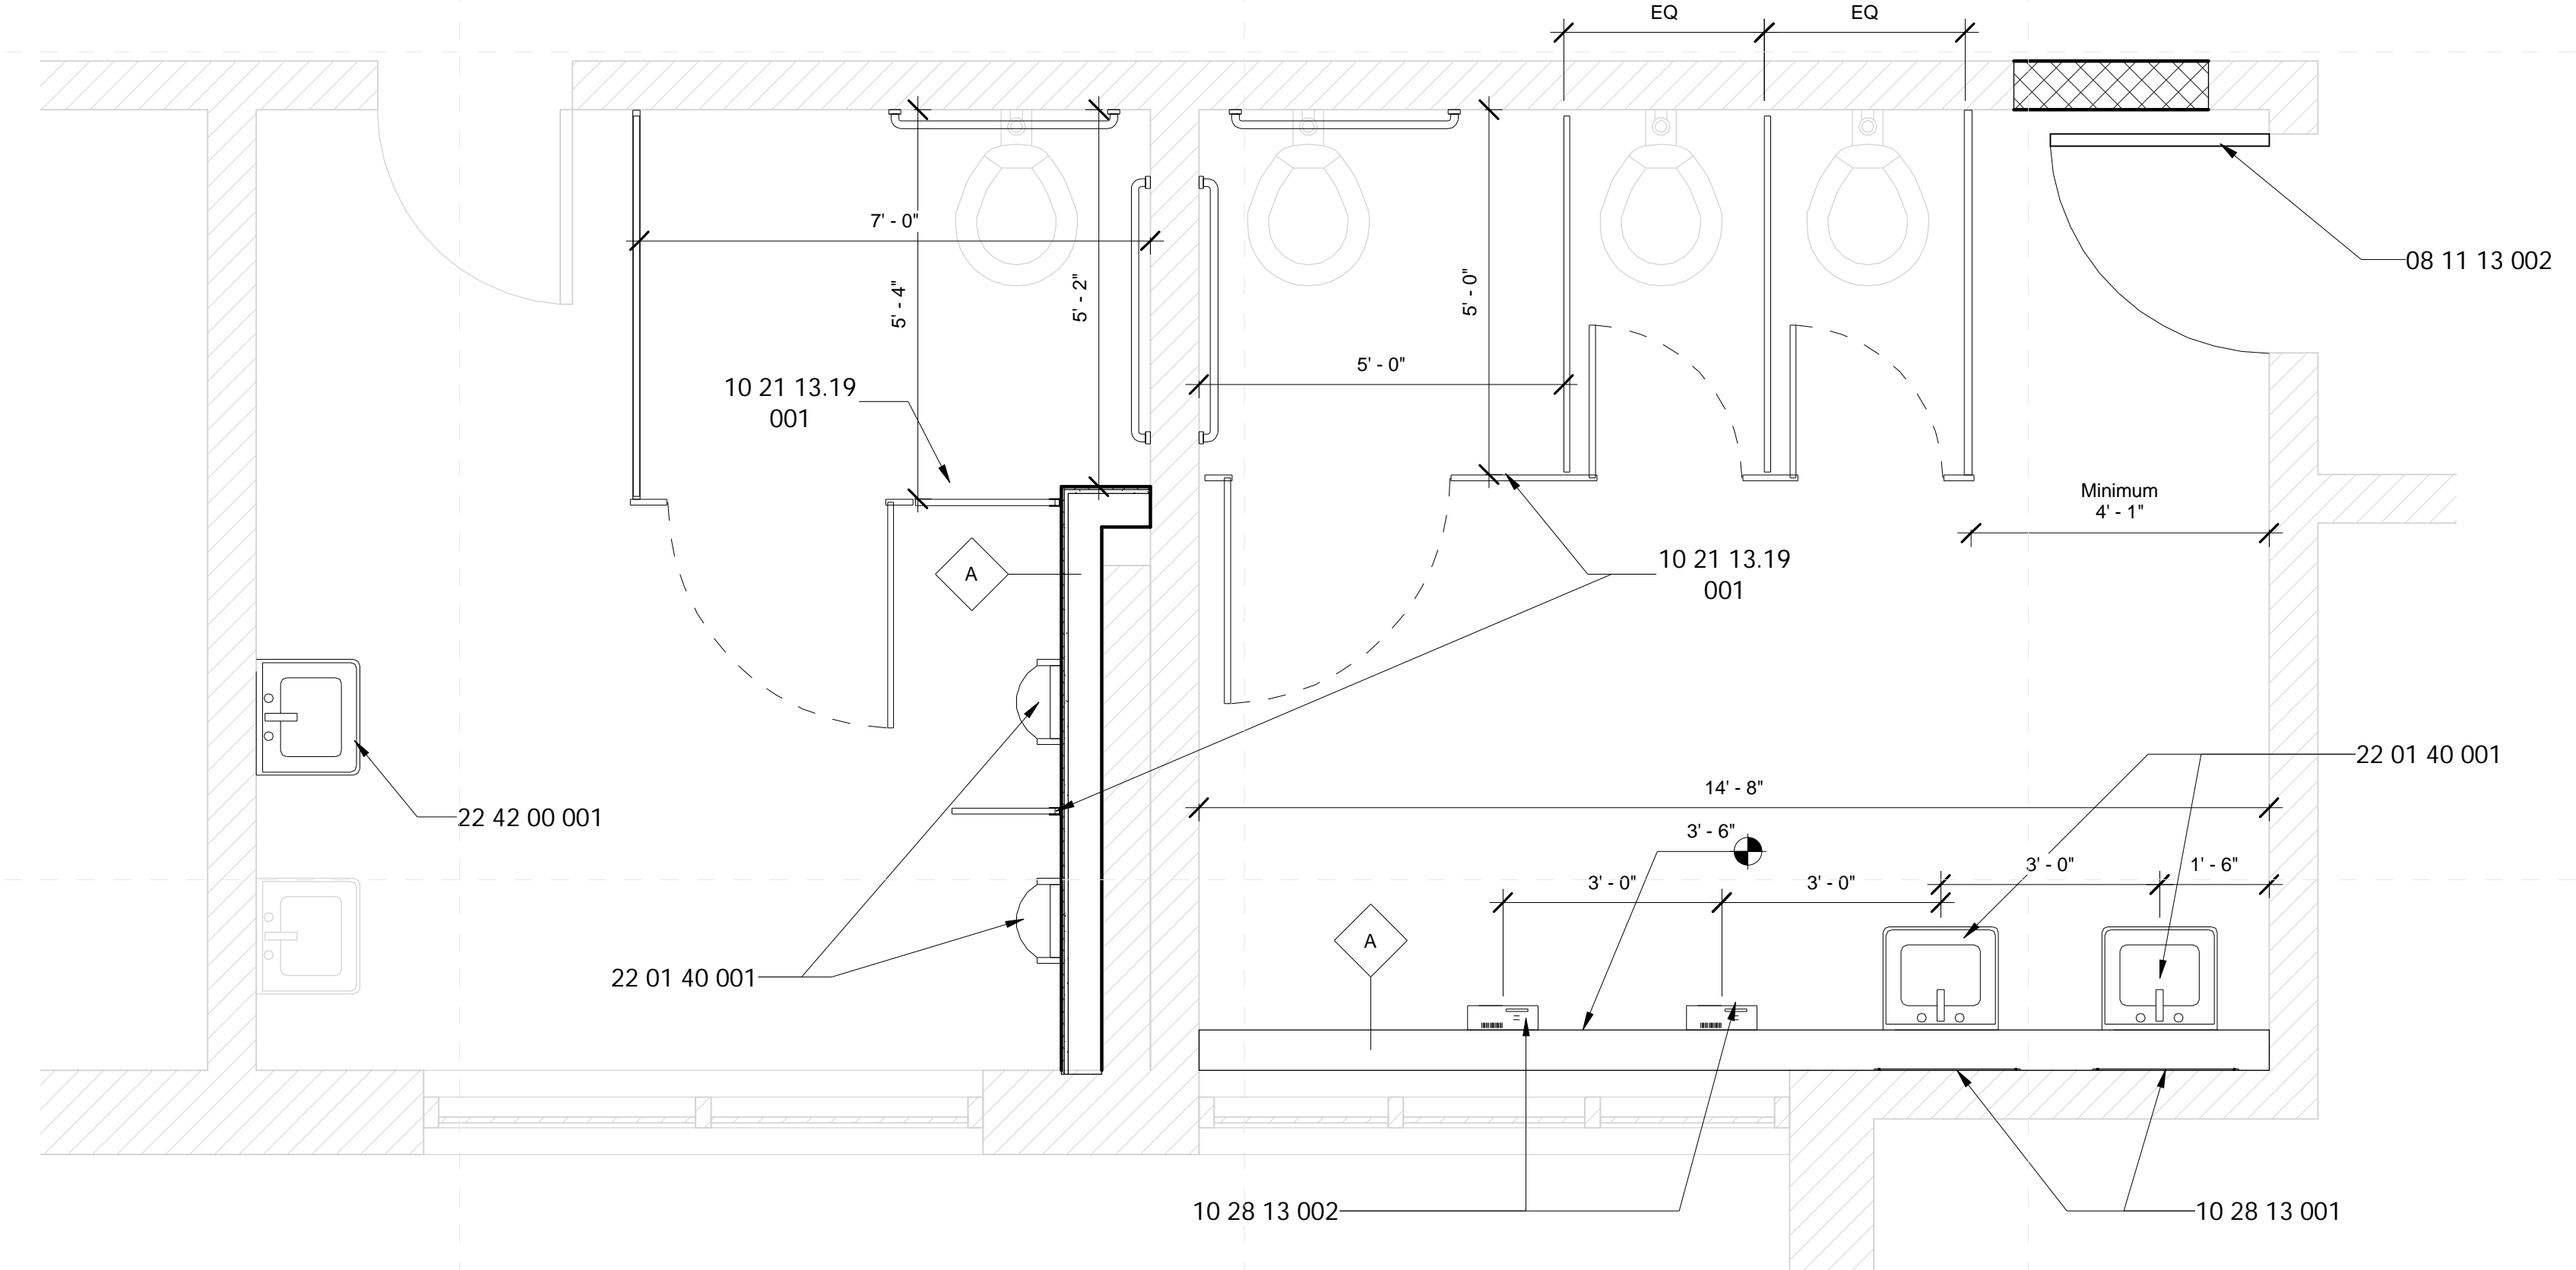


2 Toilets - South - New Construction
1/2" = 1'-0"

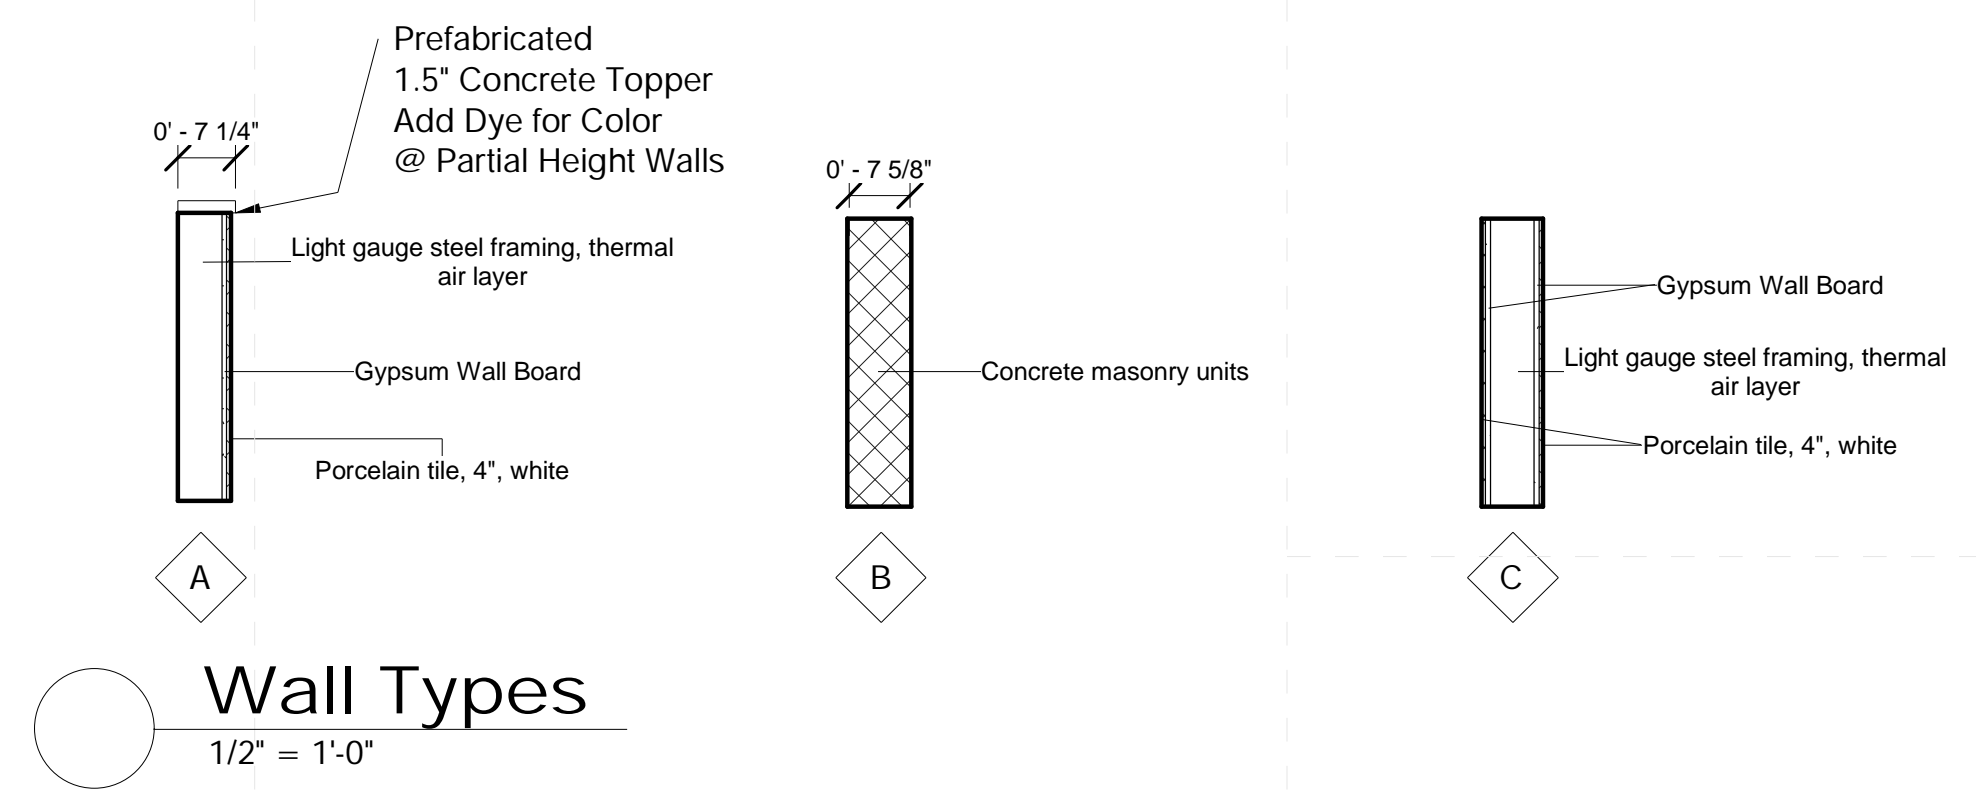

10/5/2021 11:15:32 AM D:\my stuff\BUSINESS\SSwork\2019\dale\Partners\21027-Sunflower County_models\21027 Gentry High School.rvt

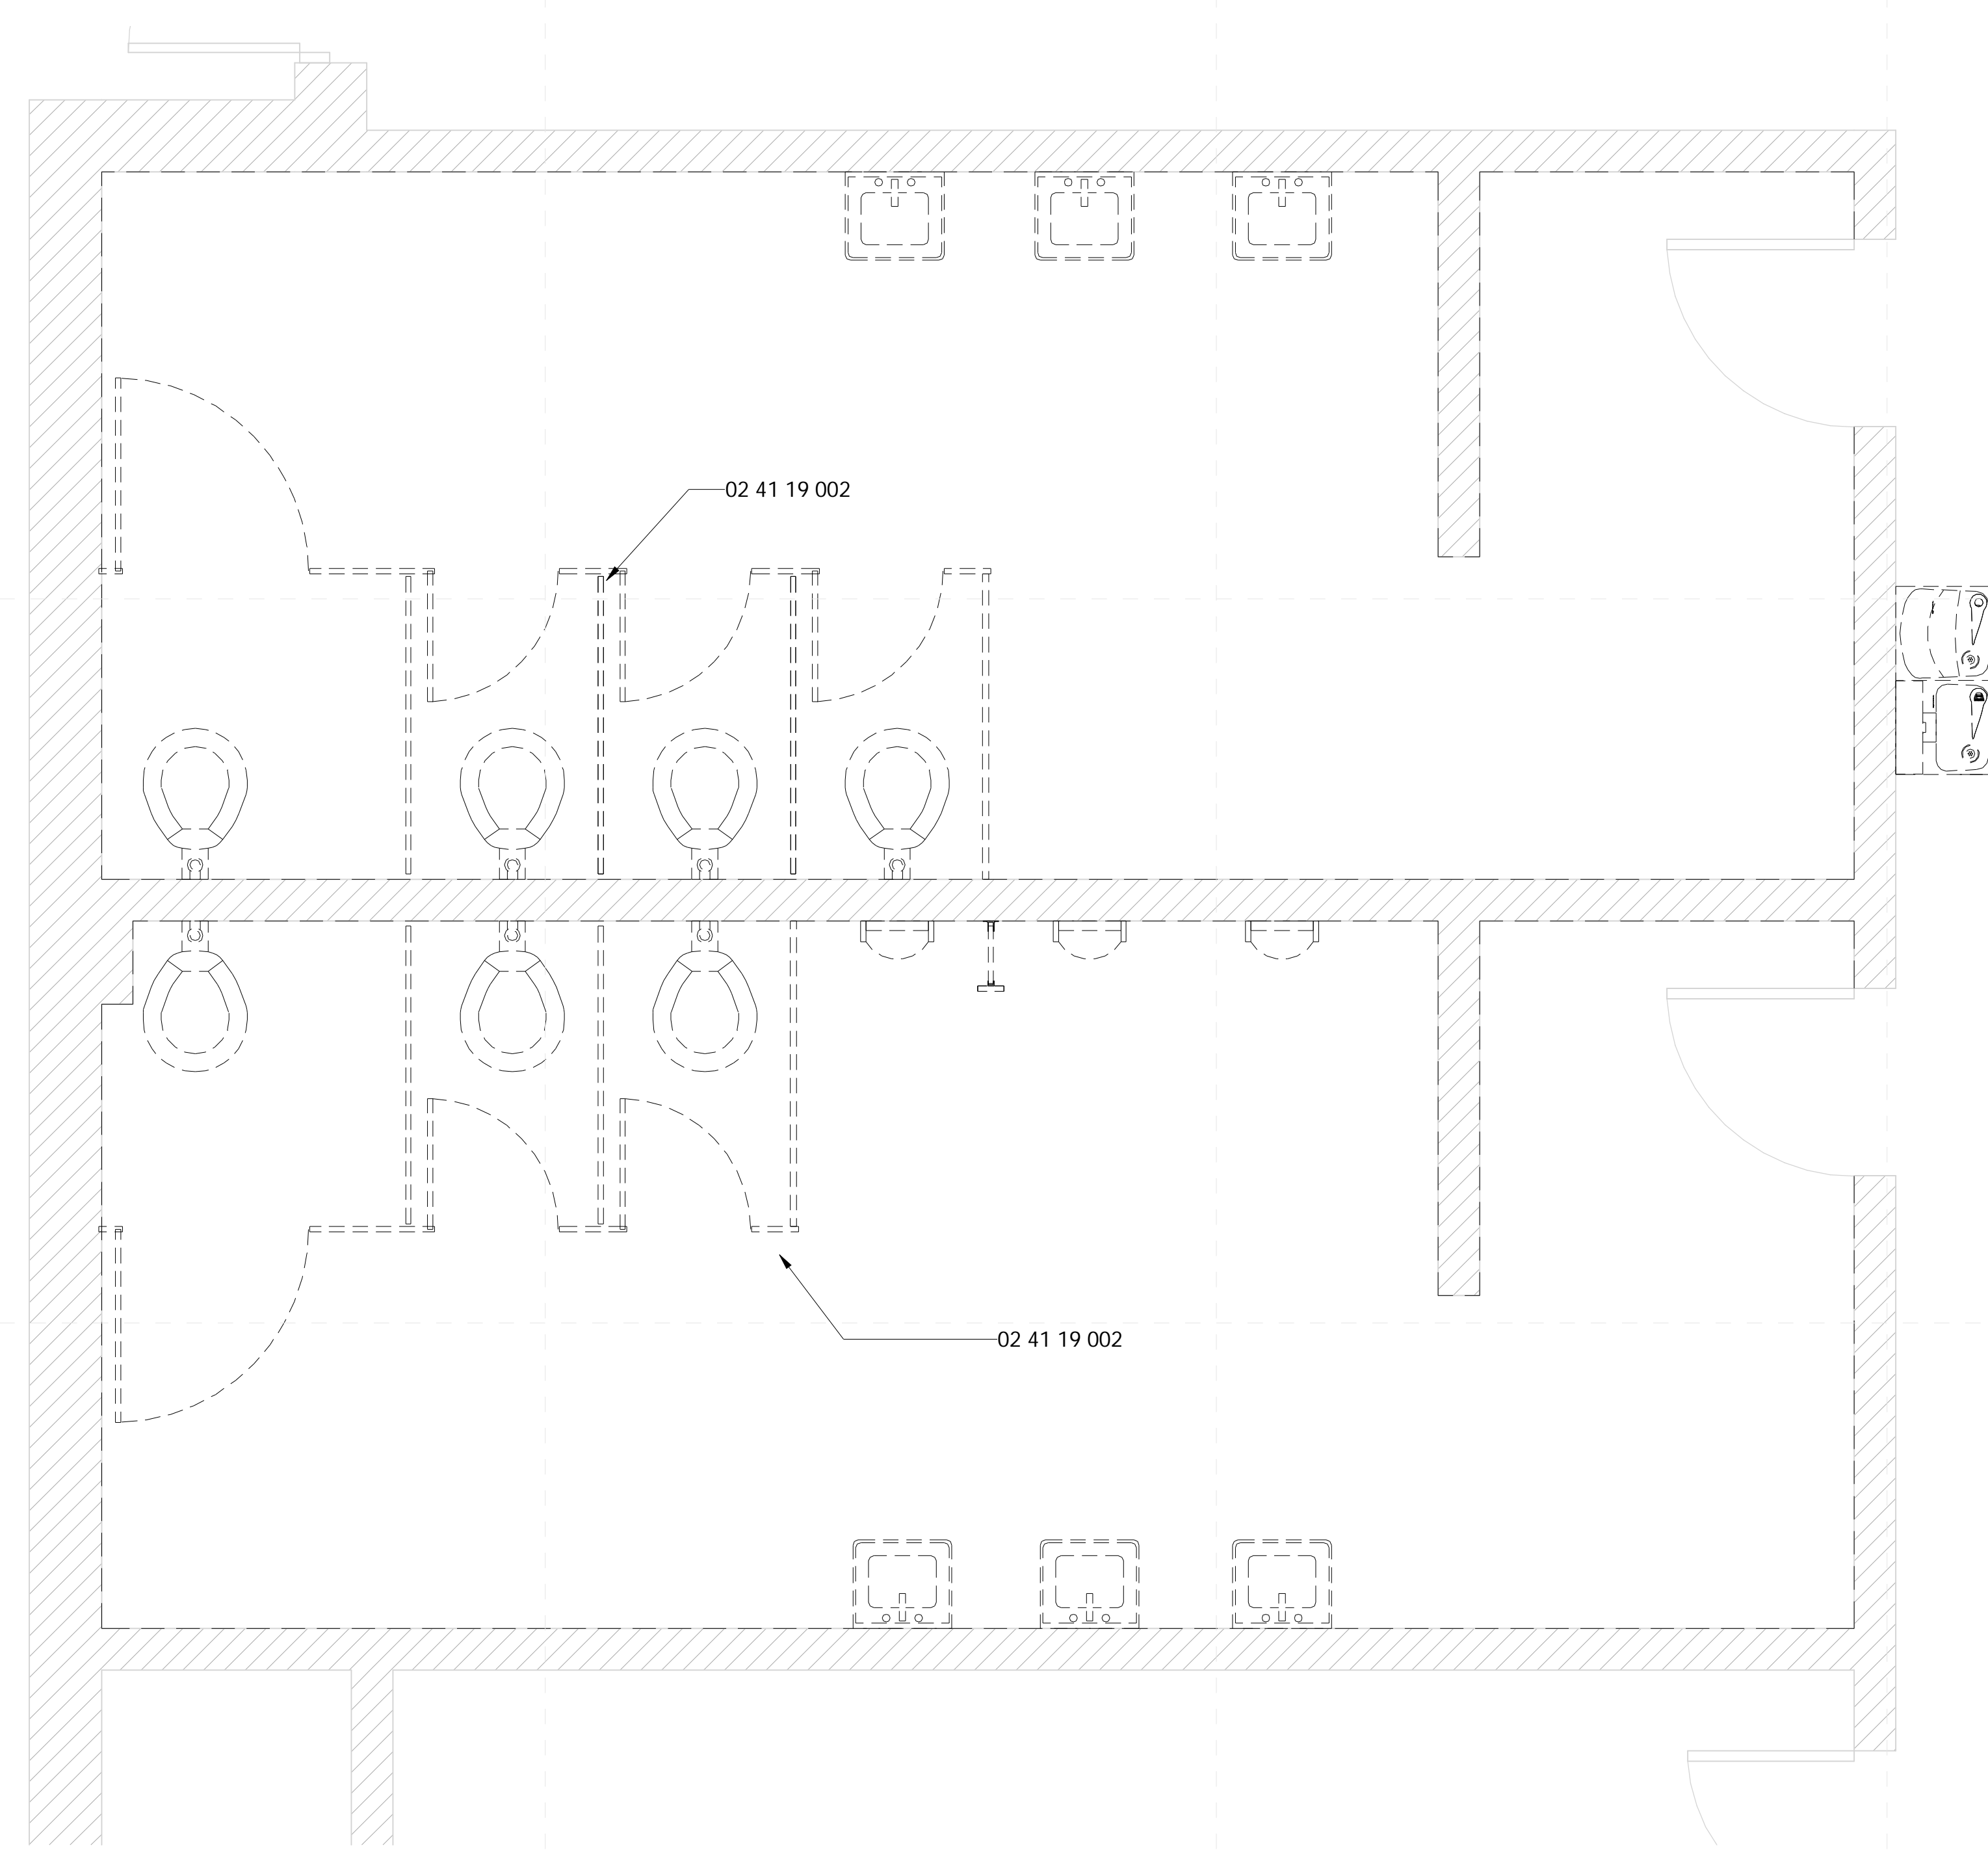

1 Toilets - North East - Demolition
1/2" = 1'-0"

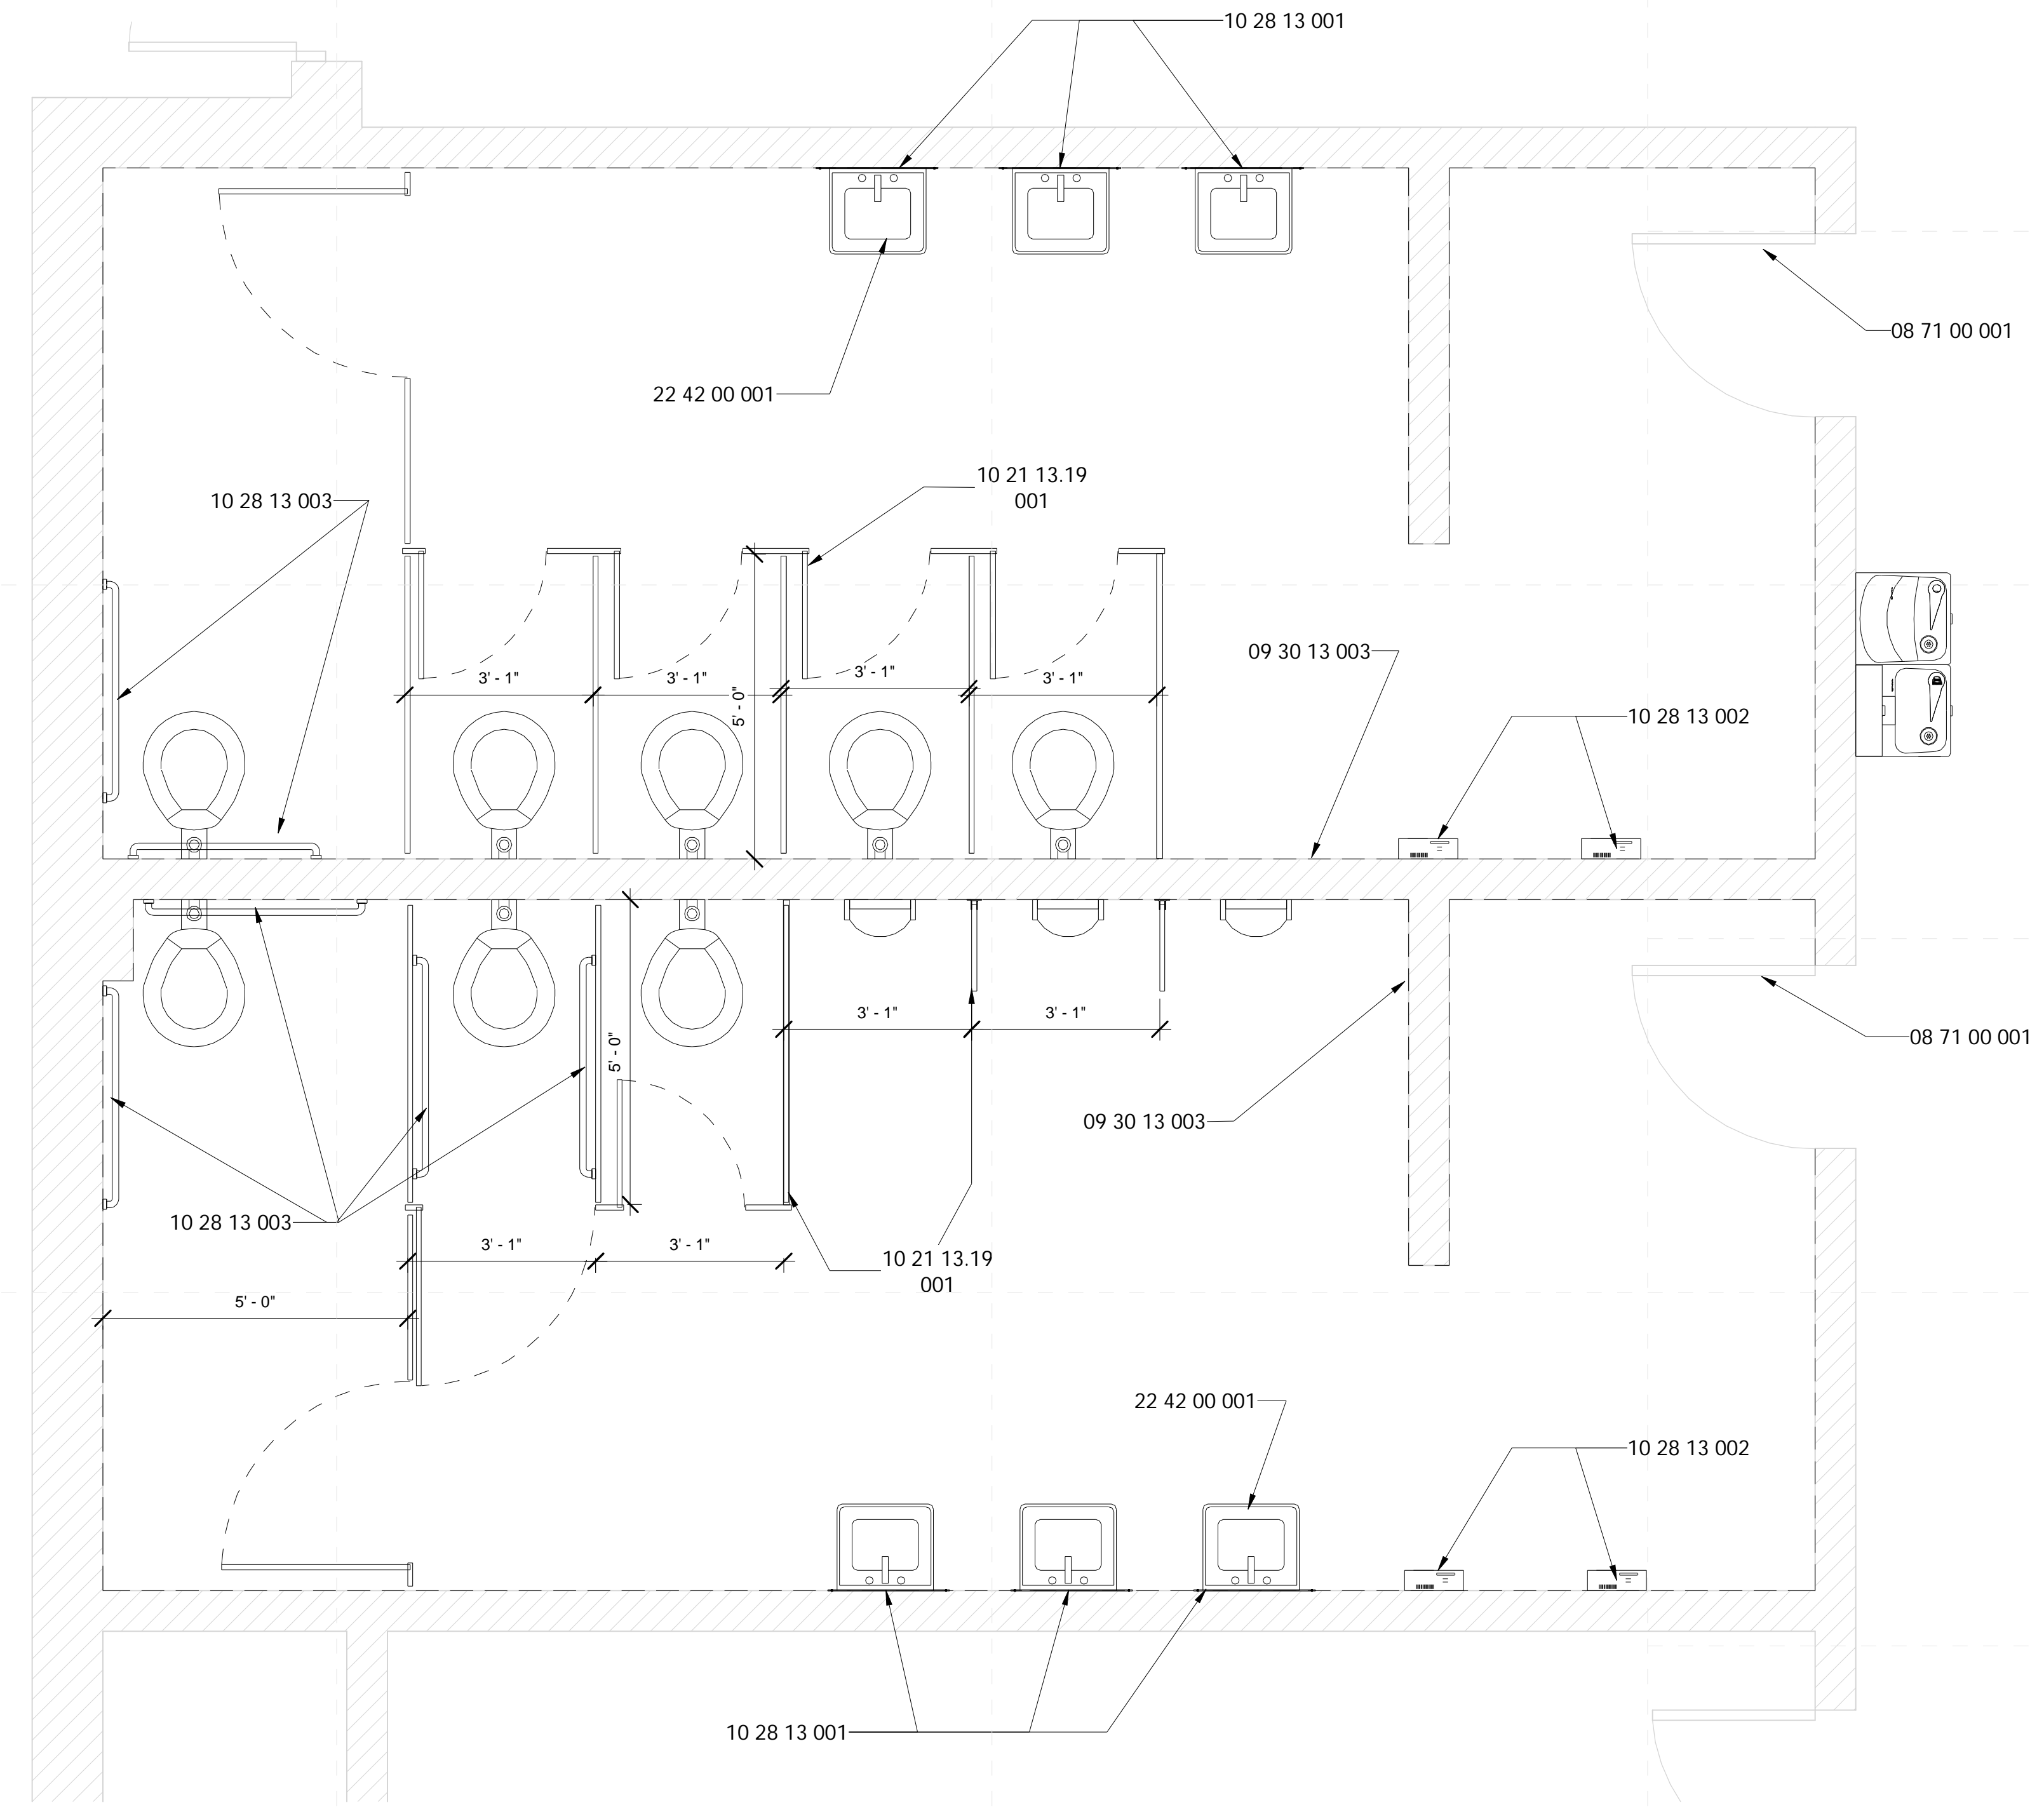

2 Toilets - North East - New Construction
1/2" = 1'-0"

General Finish Plan Notes


- All flooring transitions are to occur at center line of door panel.
- New Fixture locations shall be coordinated with mechanical sheets.
- Secure existing grab bars at all toilets.
- Install moisture resistant back board at all new tile.
- Patch/repair any damaged tile with matching.
- Prep, Prime, & Paint all interior CMU at renovated toilets.
- Remount existing toilet accessories to new partitions.

General Demolition Notes

- Where floor transitions from new floor to existing floor, a floor transition strip is to be provided. A knock-down frame is to be provided in place of the existing frame where the opening is a part of corridor.
- Remove all existing flooring, ceiling tile, rubber base, etc., where shown to be replaced by new materials in the finish schedule. RE: Floors plans, RCP, and Finish Schedule
- Owner has right of refusal for all demo work. If not retained, GC to be responsible for disposal.
- Verify all existing conditions. Notify architect of any discrepancies between the existing conditions and these documents. The Contractor is to consider the additional work required by any discrepancies to be included in this Contract.
- Burying or Burning of materials will not be permitted on site.
- Repair any damage caused to building construction identified to remain.
- Refer to other discipline drawings for additional demolition information as noted
- Schedule with the Owner any demolition that involves exposing to the weather the interior portions of building to remain. This work is to be performed during good, dry weather or temporary waterproof barrier walls shall be constructed at all occurrences where the demolition exposes weather to the interior of portions of buildings to remain.
- Existing loose school property to be the responsibility of the school district, removal of property by owner to be coordinated between the contractor and school district.
- Where areas are removed or altered, patch, repair, & paint to match adjacent surface material and finish.

Specific Notes

02 41 19 002	Dashed lines indicated extent of demoed work
08 71 00 001	Replace all door hardware with new at existing leaf
09 30 13 003	Install new wall tile flush and straight with accent top piece, floor to partial wall/window sill height; typical at bathroom interior unless noted otherwise
10 21 13.19 001	Install new toilet partitions (typical)
10 28 13 001	Install wall hung mirror here; center over fixture unless noted otherwise
10 28 13 002	Install hand dryer here; coordinate with electrical & mechanical
10 28 13 003	Install new ADA/AMD Grab bars here
22 42 00 001	Coordinate new fixture installations with mechanical, typical for new

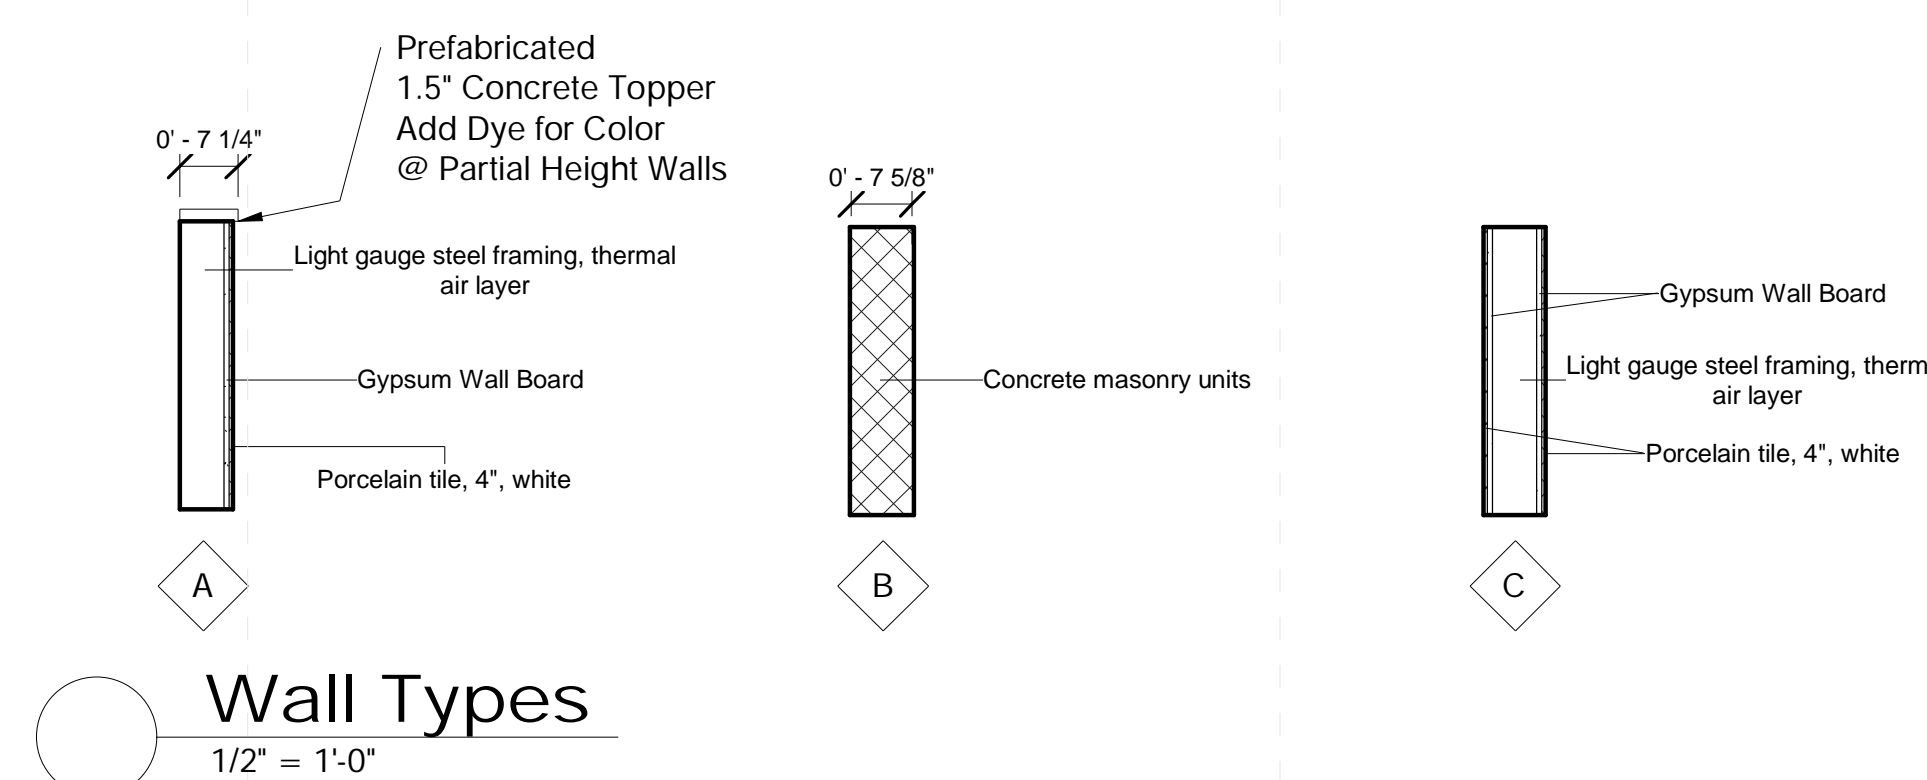
















Wall Types
1/2" = 1'-0"


General RCP Notes

- All ceiling heights shall be same as existing or lower, unless noted otherwise.
- Contractor shall paint all surfaces above 8'-4" at wall, roof, and ceiling, as well as anything attached therein at all rooms labeled OTS, unless noted otherwise.
- Repair/replace any and all ceiling damaged due to construction activities.
- Bent ceiling grid damaged due to construction activities shall be replaced or bent to appear as new in shape.

Not For Construction

Ceiling Legend

-  Moisture Resistant Acoustical Lay In Ceiling
-  Colored Acoustical Lay In Ceiling
-  Vinyl Faced Acoustical Lay In Ceiling
-  Gypsum Board Ceiling
-  2x2 Acoustical Lay In Ceiling
-  Plaster/Stucco
-  Concealed Fastener Painted Metal Soffit
-  2x2 Fluorescent Fixture
-  Surface-Mounted Fluorescent Light Fixture
-  Recessed Can Light Fixture
-  HVAC Supply Grille
-  HVAC Return Grille
-  Exterior Wall Light
-  Interior Wall Light
-  Open to Structure (OTS)

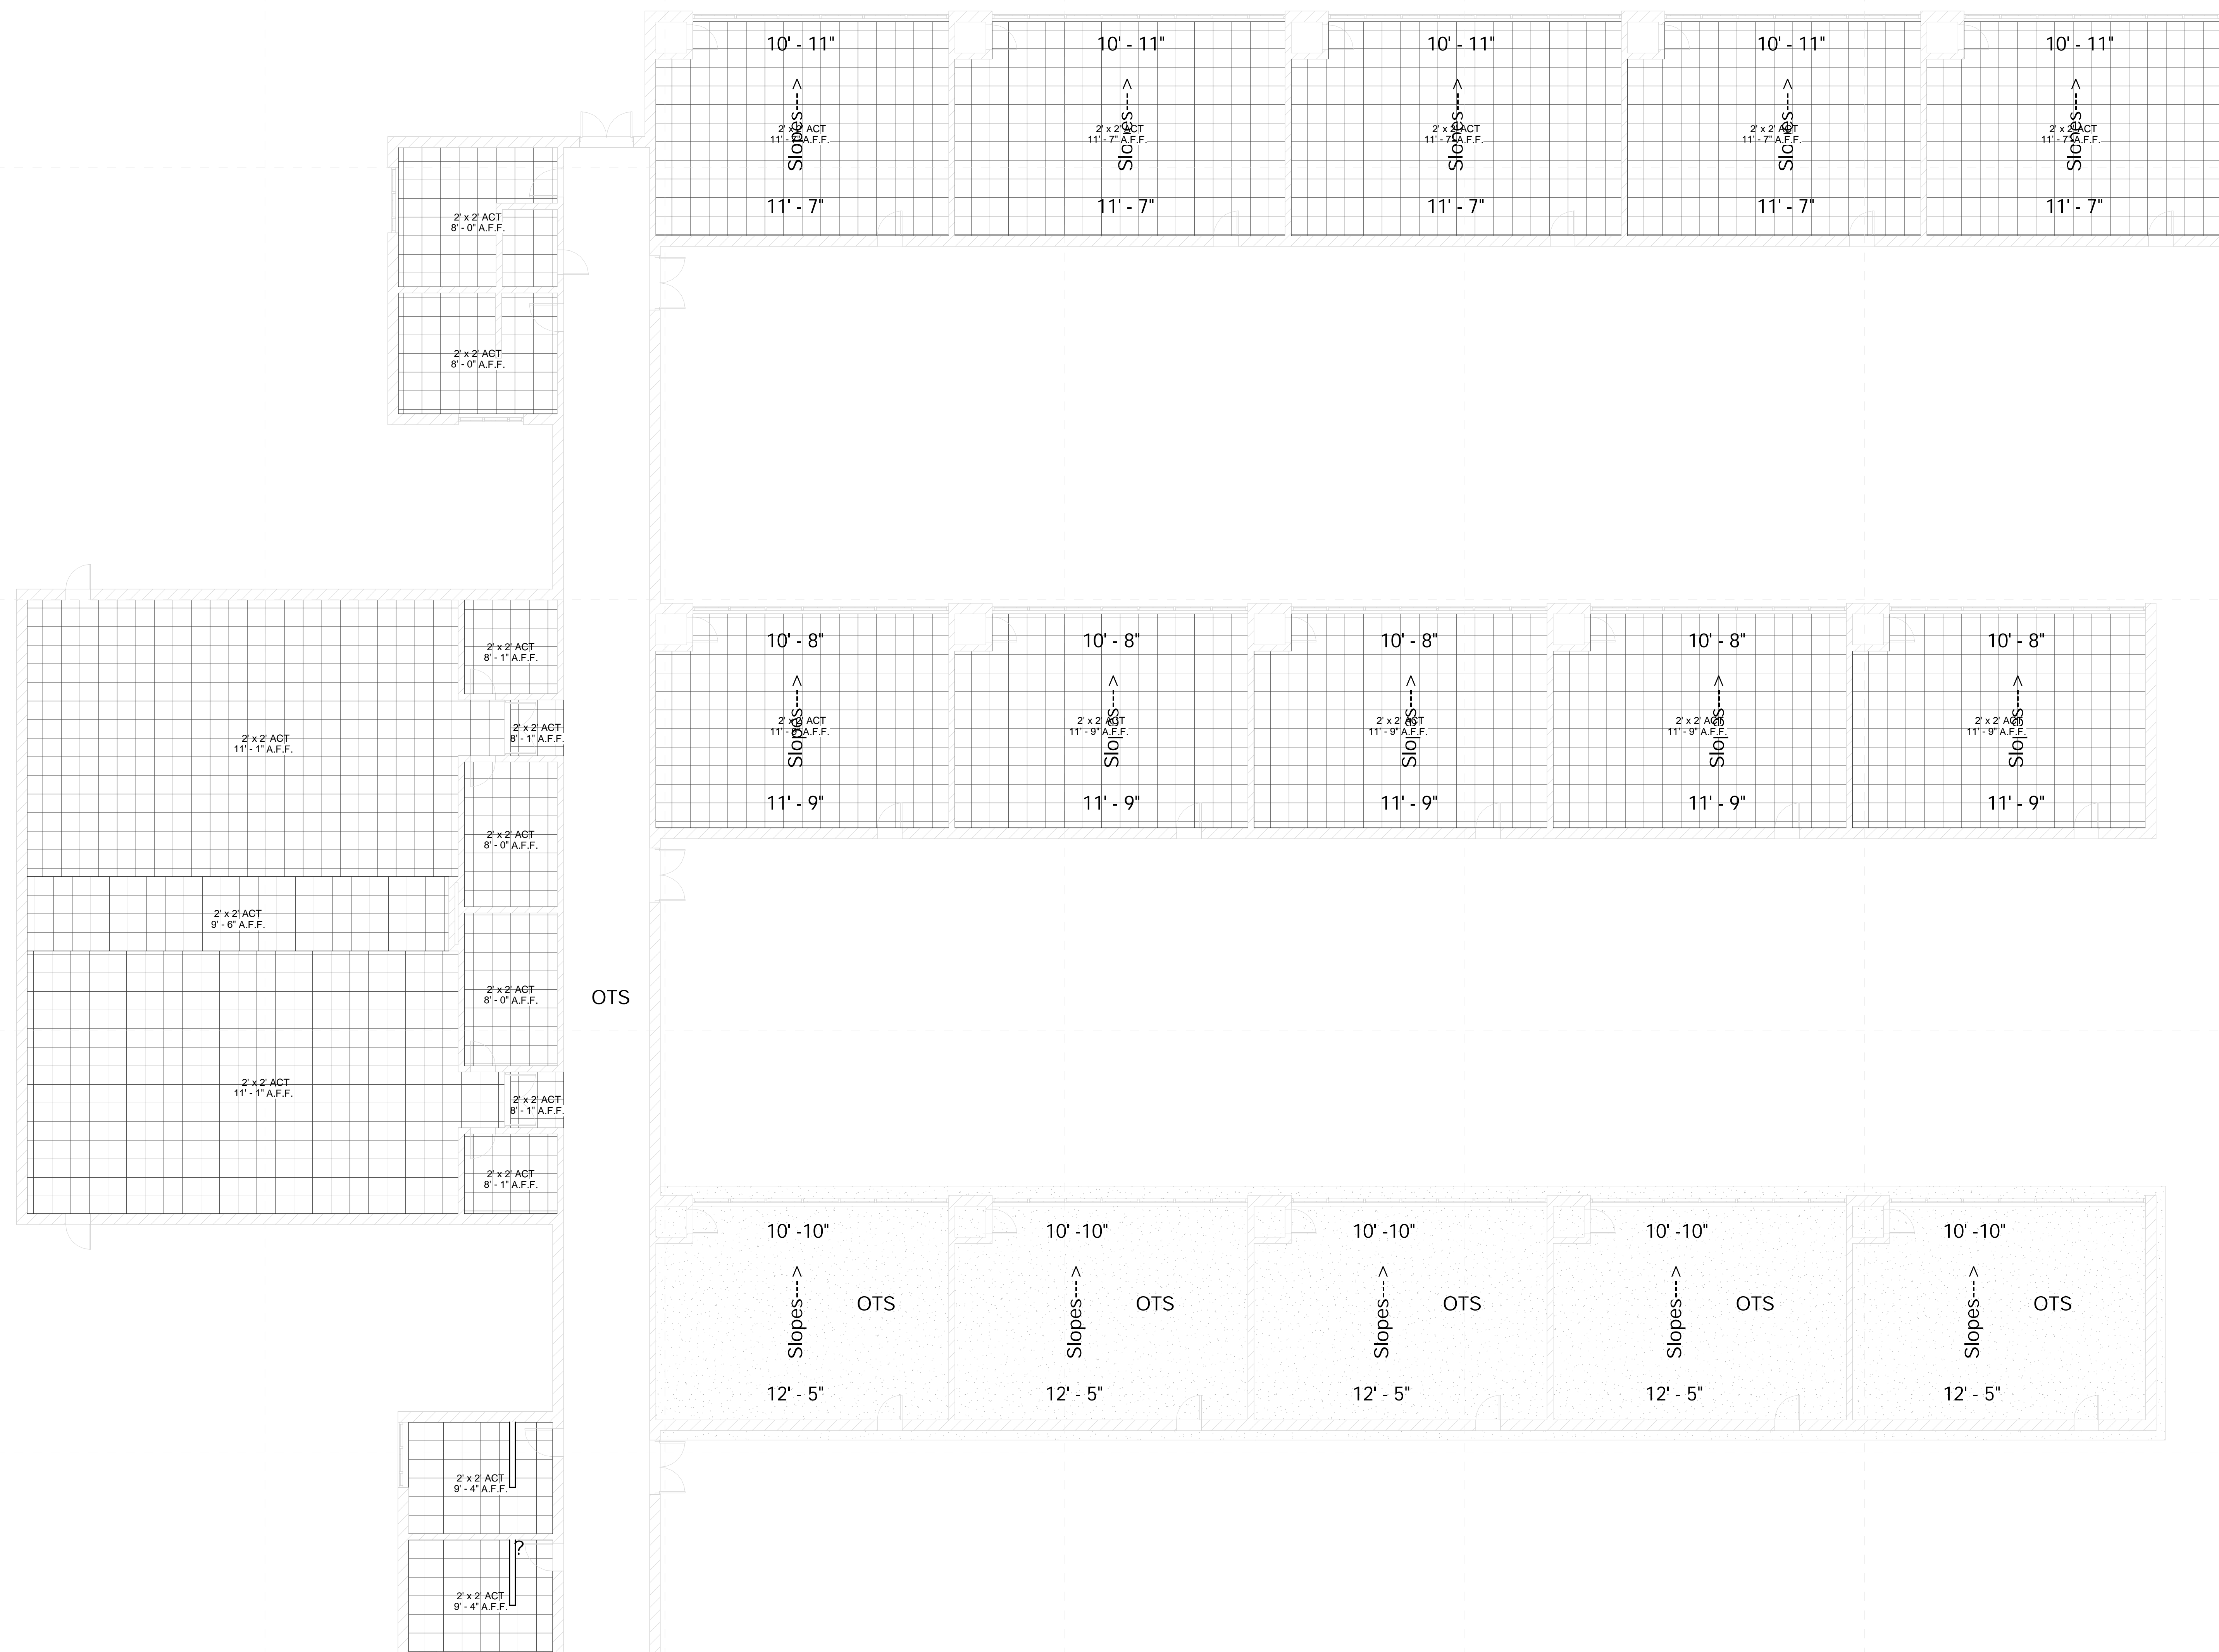

1 Main Floor - New - NW
1/8" = 1'-0"

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

A-441

RCP NW

Not For Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic Design

Project No 00000
Date Issue Date
Revisions Rev Date

A-442


RCP SW

General RCP Notes

- All ceiling heights shall be same as existing or lower, unless noted otherwise.
- Contractor shall paint all surfaces above 8'-4" at wall, roof, and ceiling, as well as anything attached therein at all rooms labeled OTS, unless noted otherwise.
- Repair/replace any and all ceiling damaged due to construction activities.
- Bent ceiling grid damaged due to construction activities shall be replaced or bent to appear as new in shape.

Ceiling Legend

- Moisture Resistant Acoustical Lay In Ceiling
- Colored Acoustical Lay In Ceiling
- Vinyl Faced Acoustical Lay In Ceiling
- Gypsum Board Ceiling
- 2x2 Acoustical Lay In Ceiling
- Plaster/Stucco
- Concealed Fastender Painted Metal Soffit
- 2x2 Fluorescent Fixture
- Surface-Mounted Fluorescent Light Fixture
- Recessed Can Light Fixture
- HVAC Supply Grille
- HVAC Return Grille
- Exterior Wall Light
- Interior Wall Light
- Open to Structure (OTS)

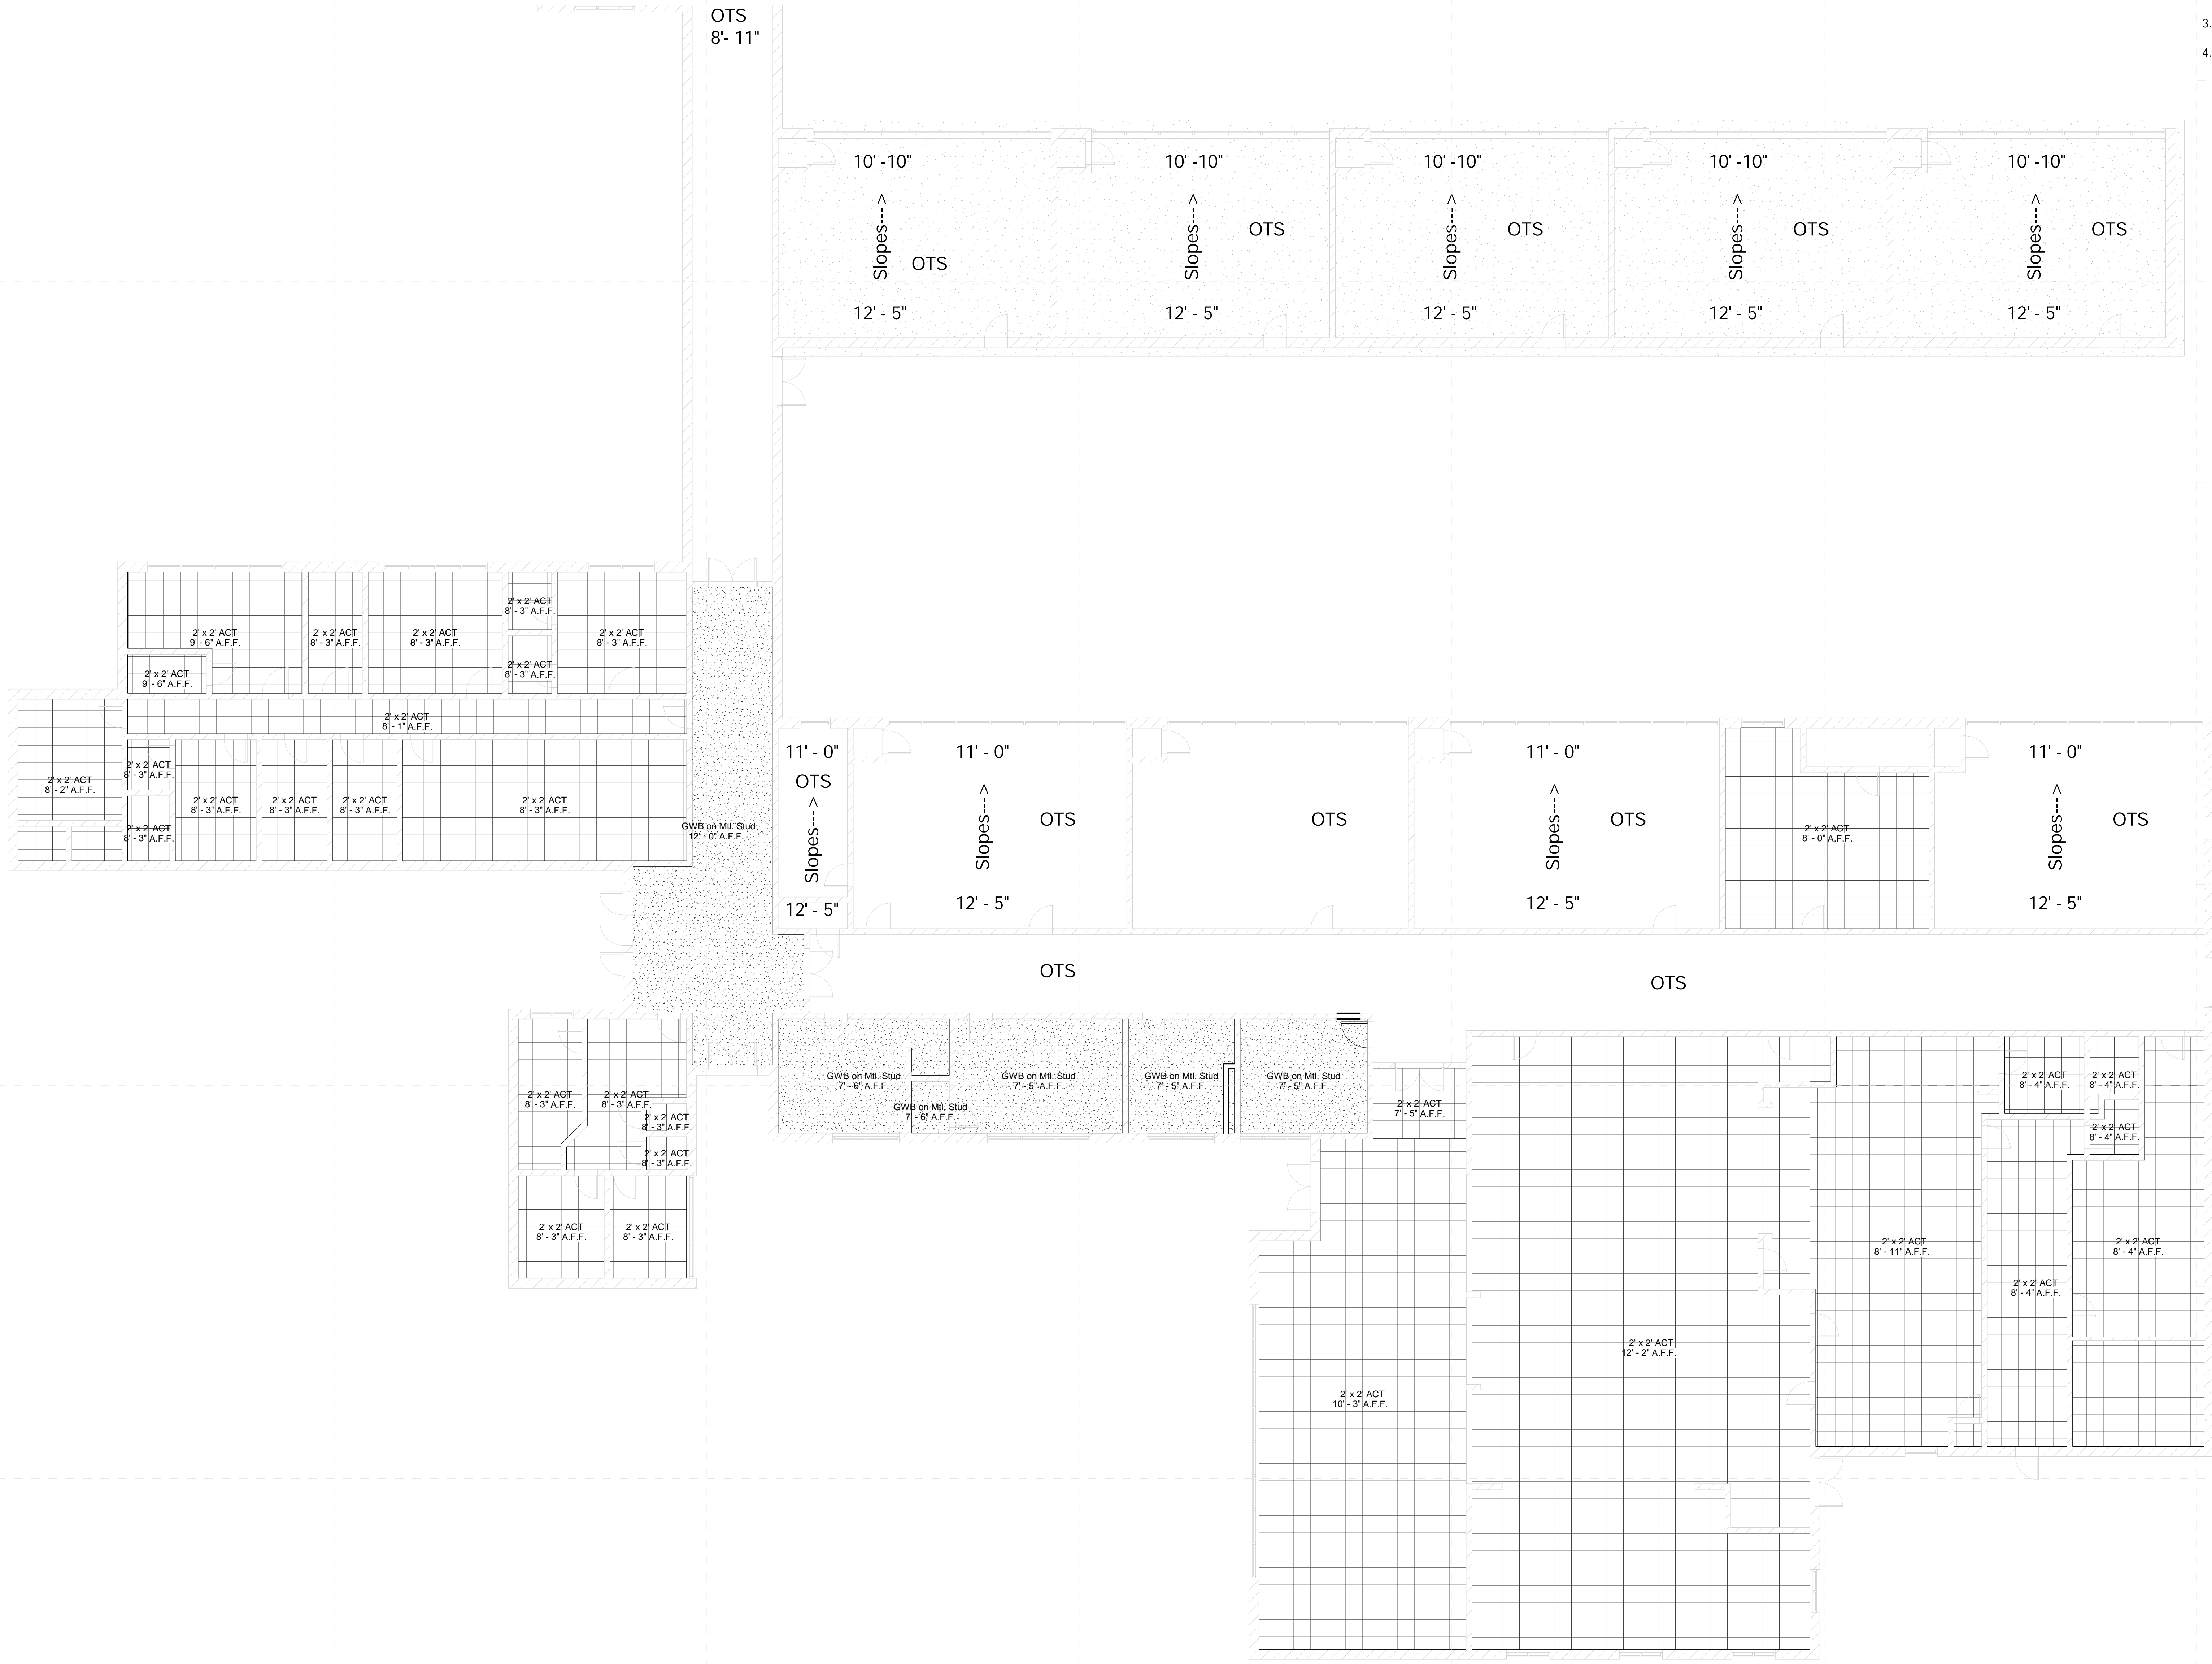

1 Main Floor - New - SW
1/8" = 1'-0"

10/5/2021 11:15:35 AM D:\my stuff\BUSINESS\work\2019\dale\Partners\21027-Sunflower County\models\21027 Gentry High School.rvt

Not For
Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751

Schematic
Design

Project No	00000
Date	Issue Date
Revisions	Rev Date

A-443




RCP NE

General RCP Notes

- All ceiling heights shall be same as existing or lower, unless noted otherwise.
- Contractor shall paint all surfaces above 8'-4" at wall, roof, and ceiling, as well as anything attached therein at all rooms labeled OTS, unless noted otherwise.
- Repair/replace any and all ceiling damaged due to construction activities.
- Bent ceiling grid damaged due to construction activities shall be replaced or bent to appear as new in shape.

Ceiling Legend

- Moisture Resistant Acoustical Lay In Ceiling
- Colored Acoustical Lay In Ceiling
- Vinyl Faced Acoustical Lay In Ceiling
- Gypsum Board Ceiling
- 2x2 Acoustical Lay In Ceiling
- Plaster/Stucco
- Concealed Fastener Painted Metal Soffit
- 2x2 Fluorescent Fixture
- Surface-Mounted Fluorescent Light Fixture
- Recessed Can Light Fixture
- HVAC Supply Grille
- HVAC Return Grille
- Exterior Wall Light
- Interior Wall Light
- Open to Structure (OTS)

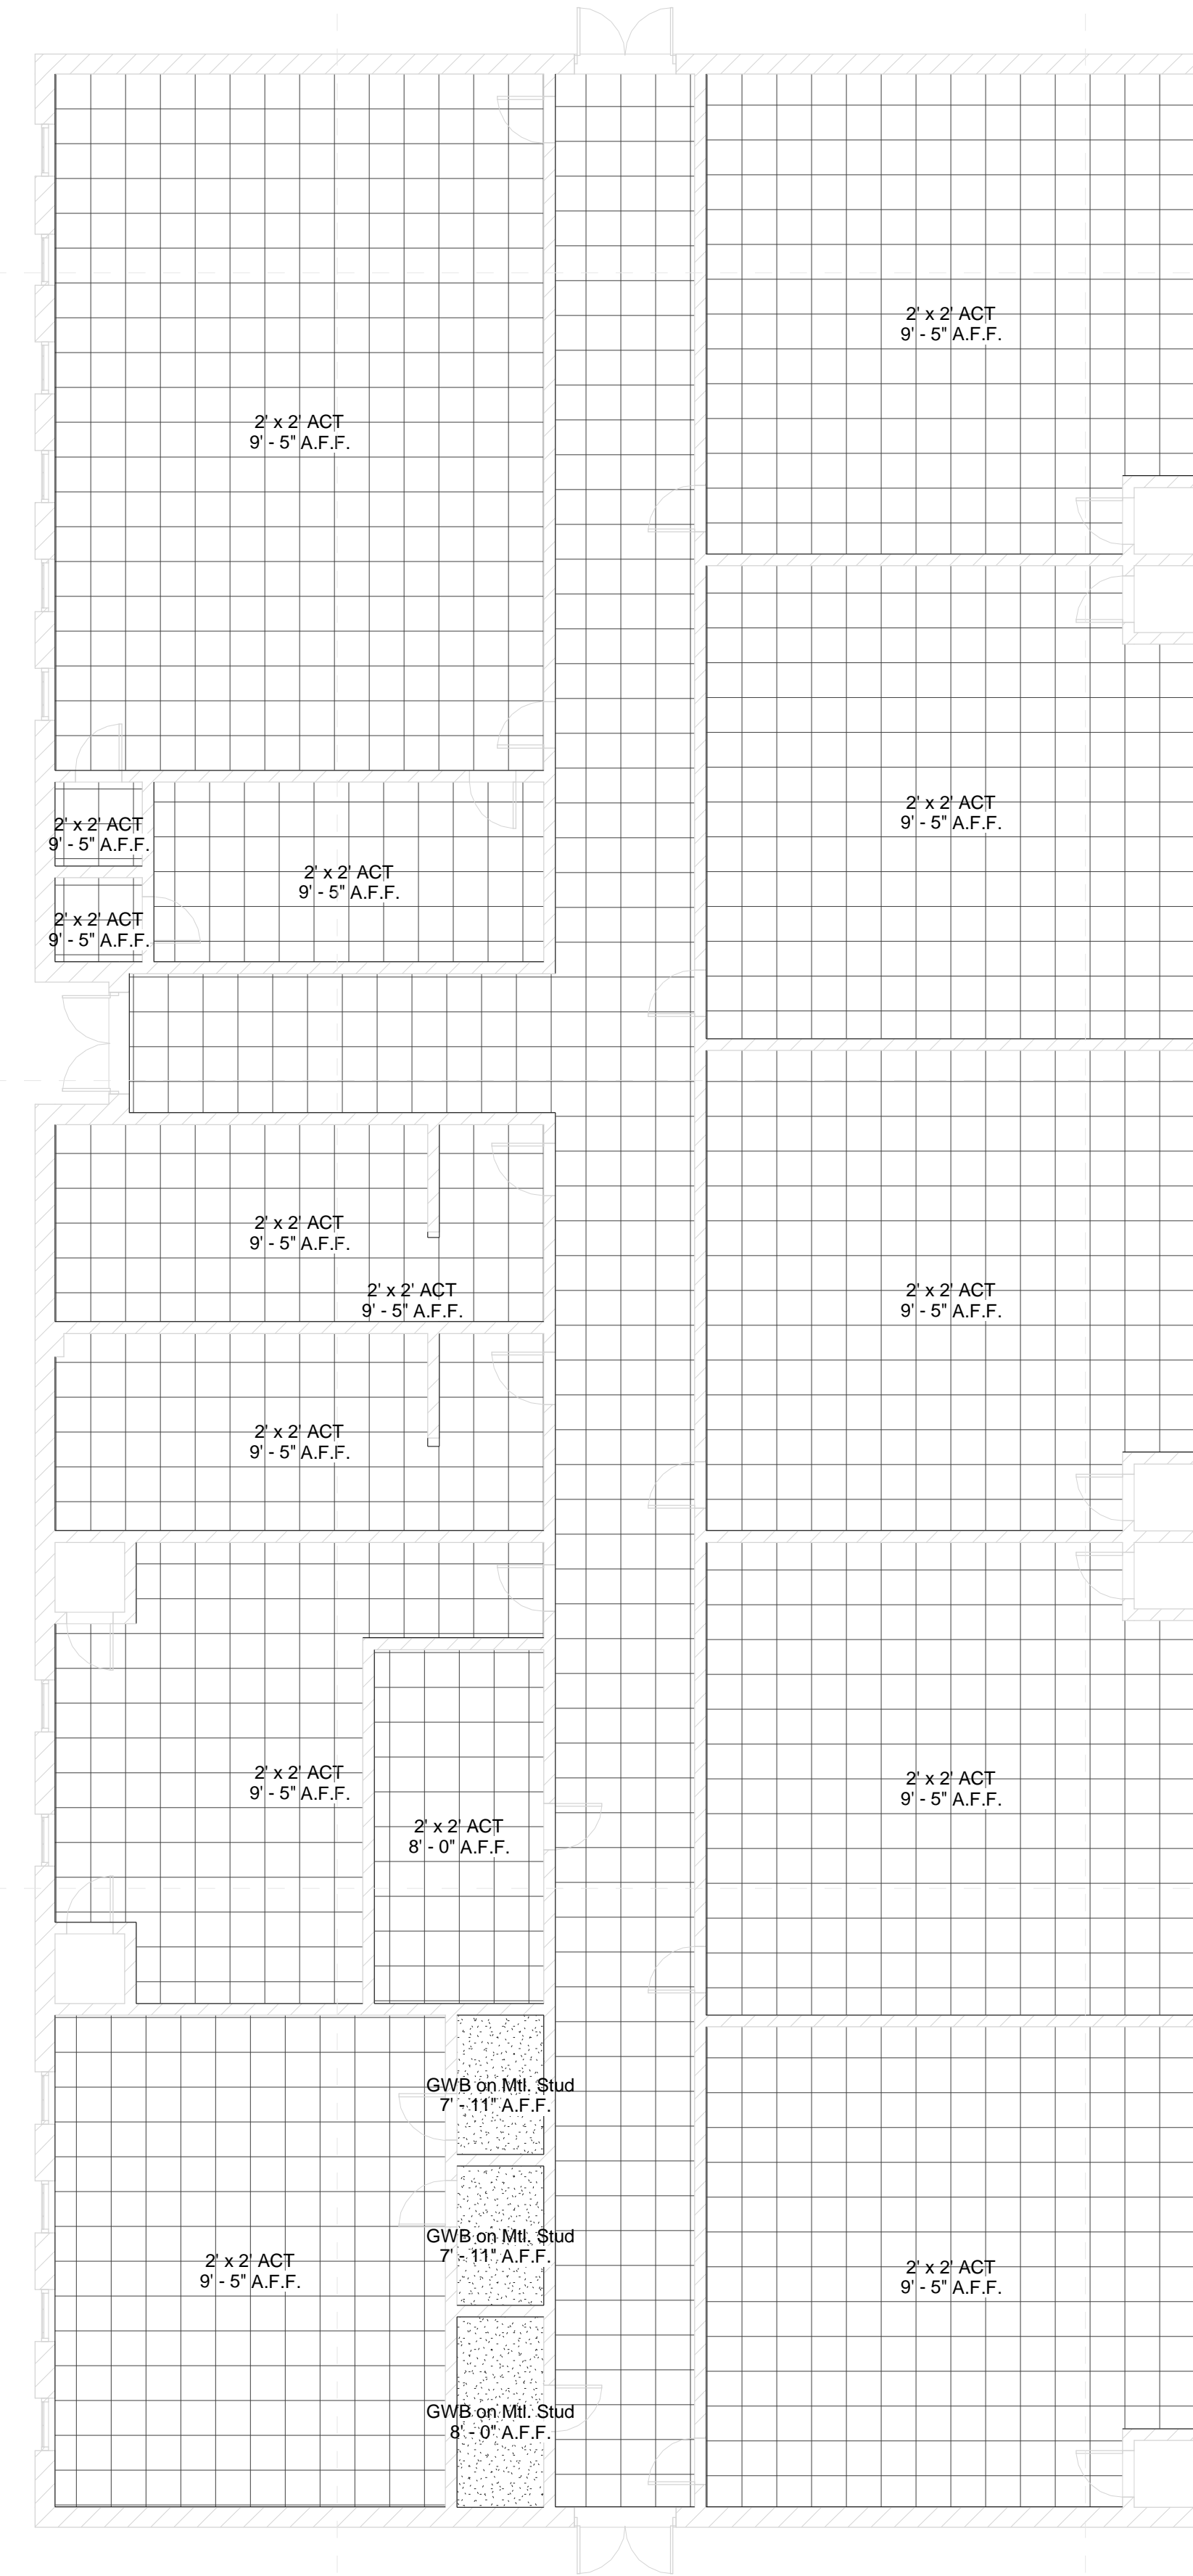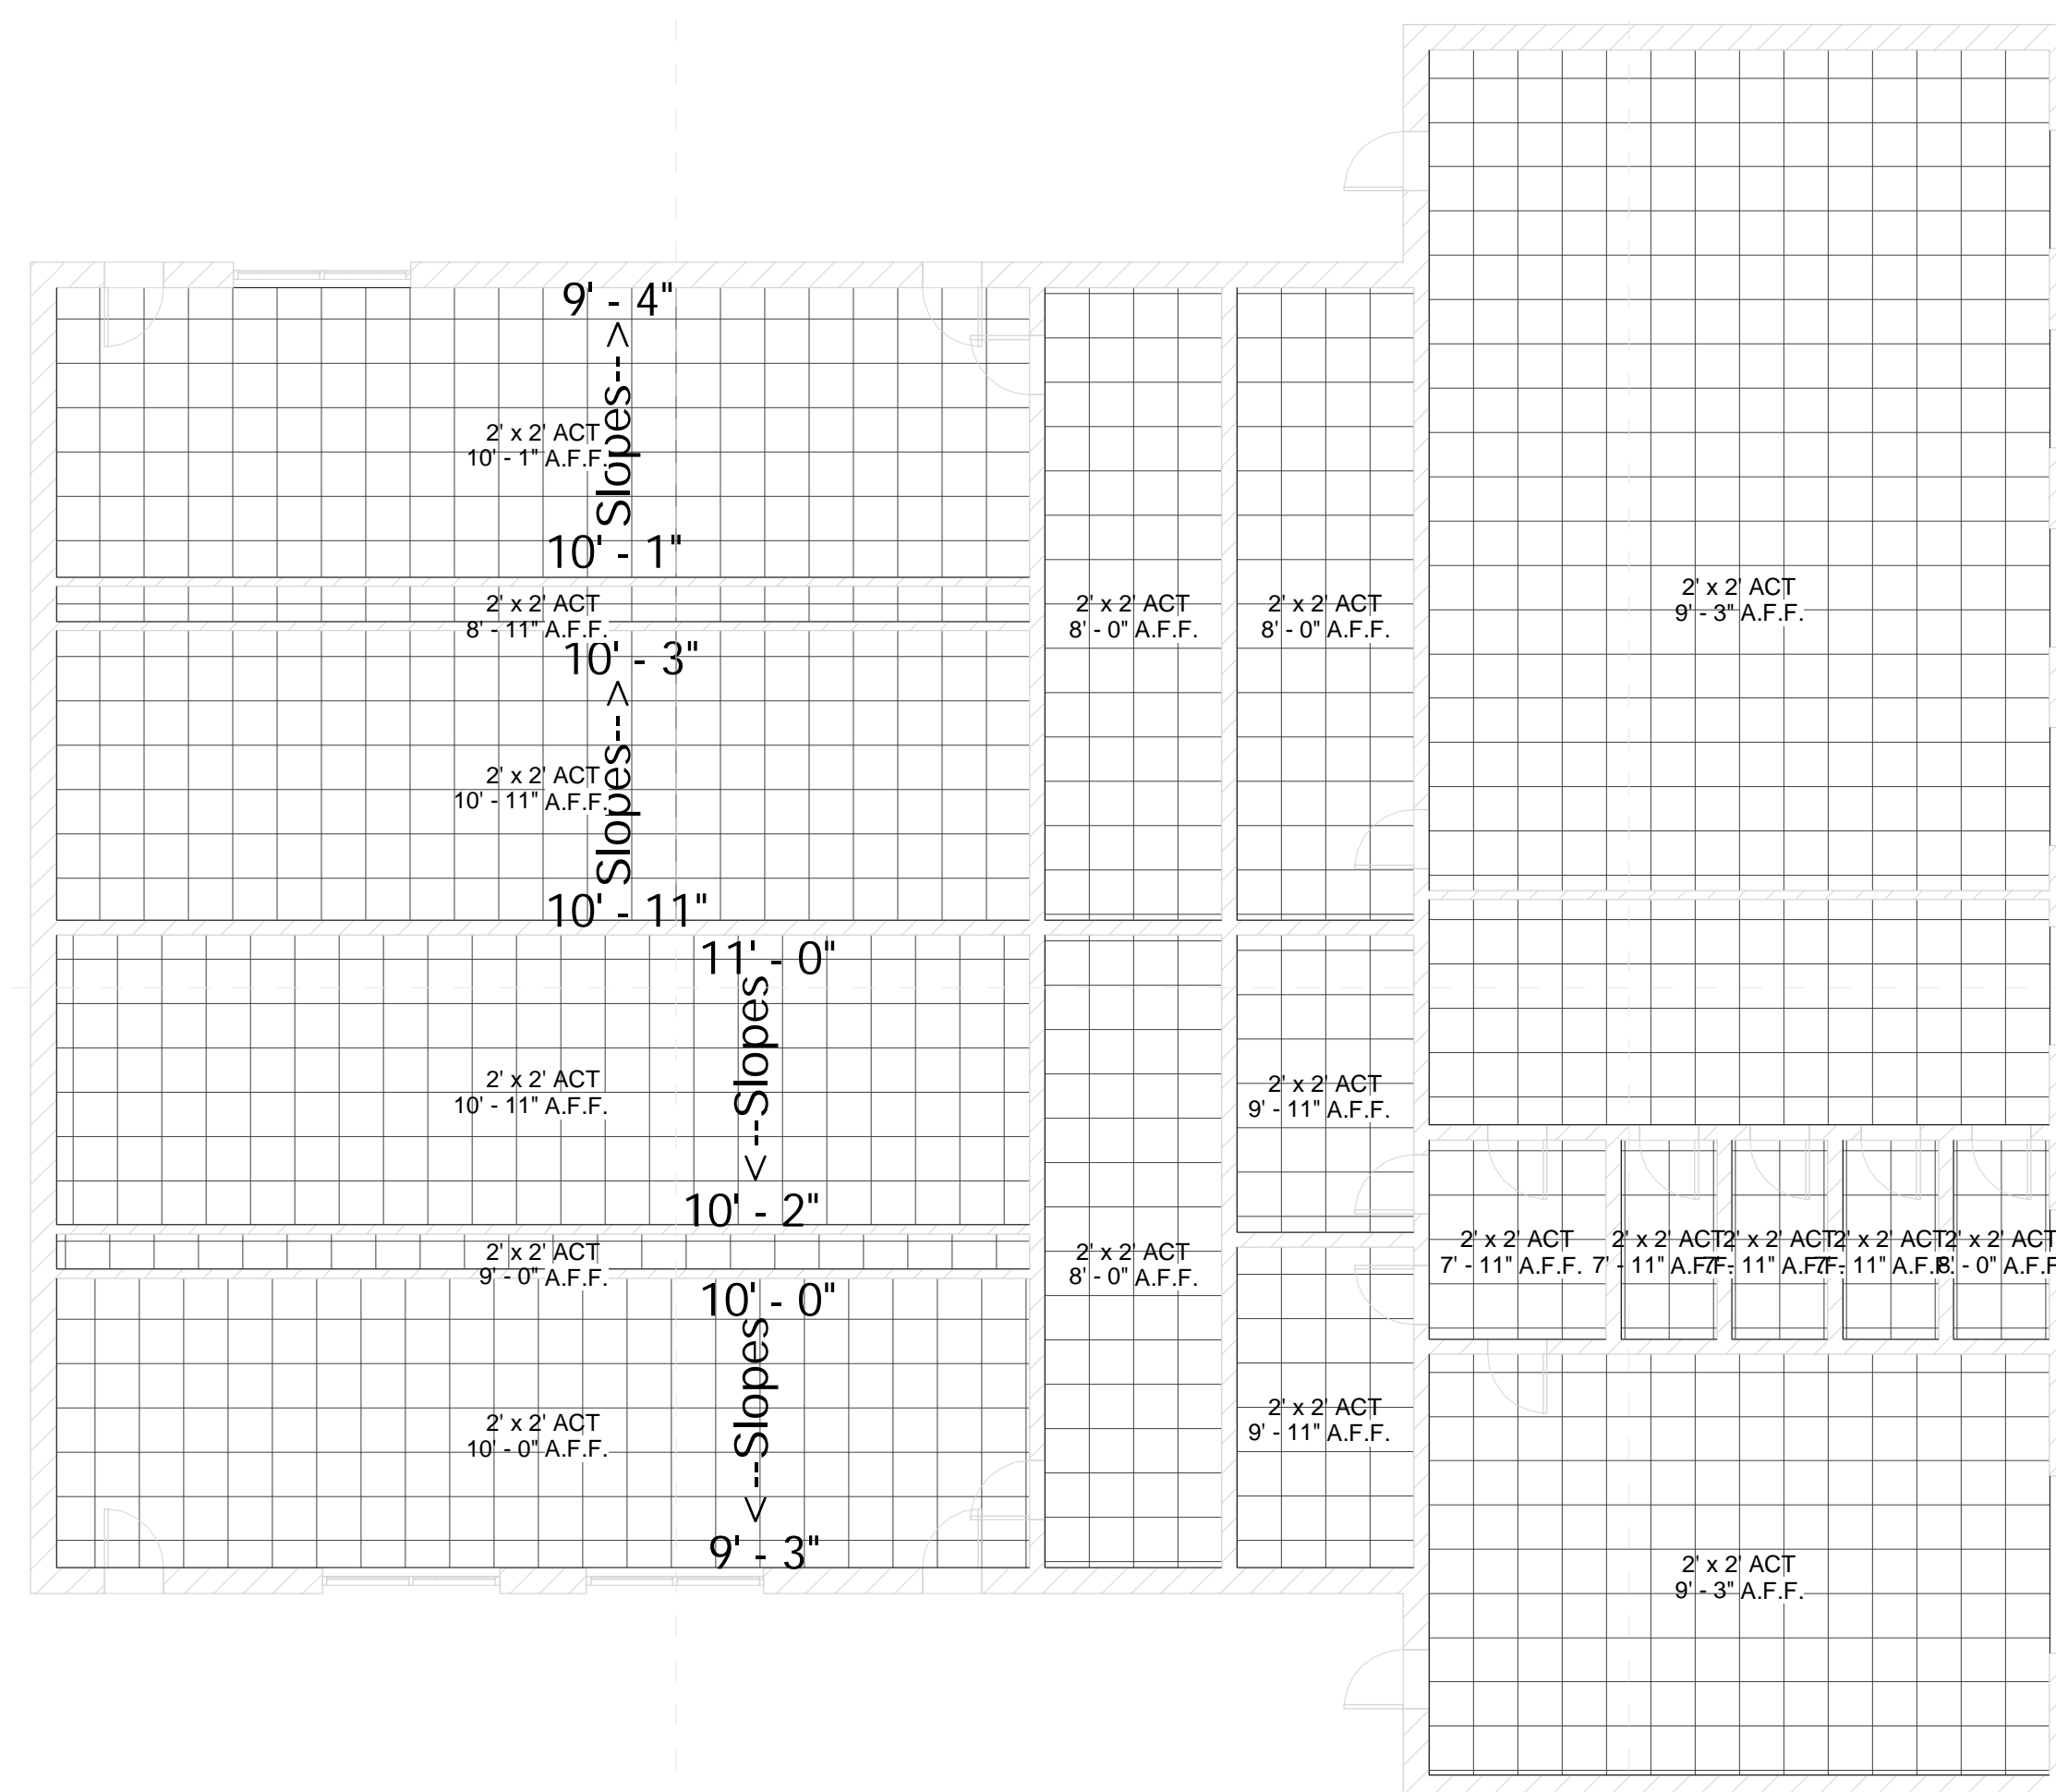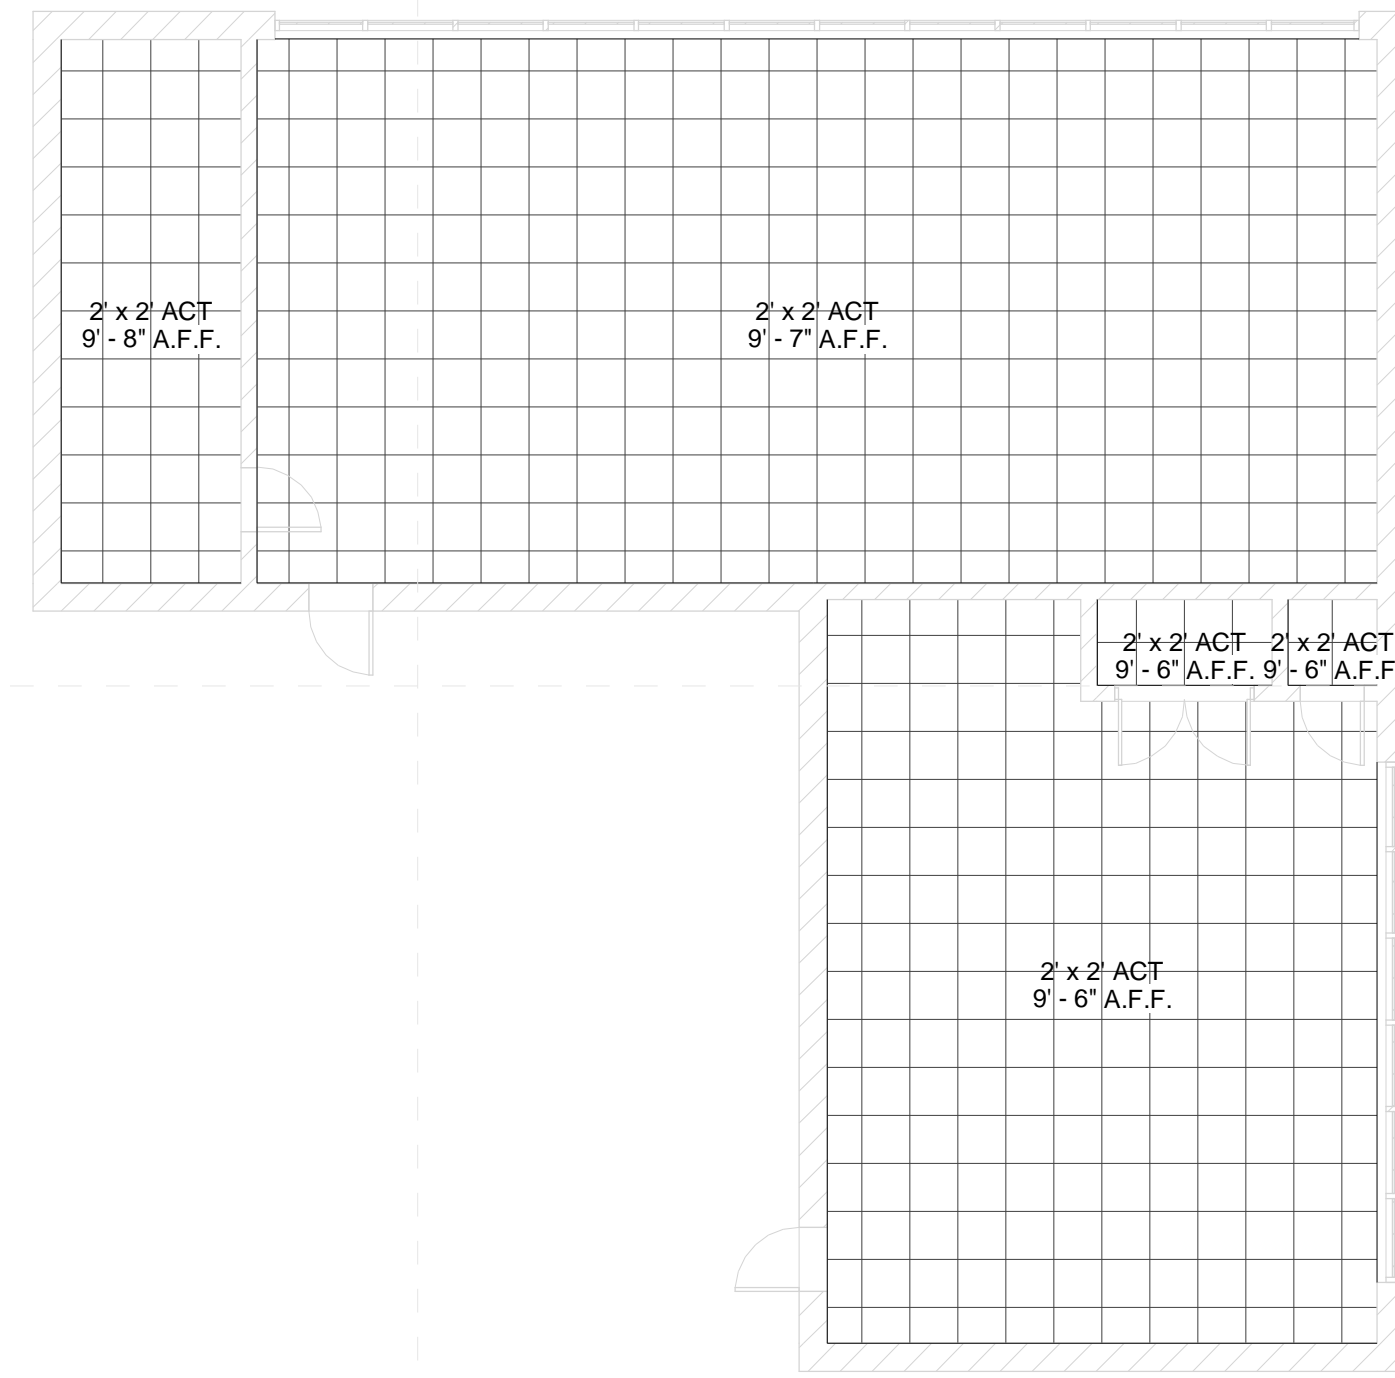

1 Main Floor - New - NE
1/8" = 1'-0"

Not For Construction

Gentry High School Renovations
801 B King Rd. Indianola, MS 38751
















Schematic Design


Project No	00000
Date	Issue Date
Revisions	Rev Date

General RCP Notes

- All ceiling heights shall be same as existing or lower, unless noted otherwise.
- Contractor shall paint all surfaces above 8'-4" at wall, roof, and ceiling, as well as anything attached therein at all rooms labeled OTS, unless noted otherwise
- Repair/replace any and all ceiling damaged due to construction activities.
- Bent ceiling grid damaged due to construction activities shall be replaced or bent to appear as new in shape.

Ceiling Legend

-  Moisture Resistant Acoustical Lay In Ceiling
-  Colored Acoustical Lay In Ceiling
-  Vinyl Faced Acoustical Lay In Ceiling
-  Gypsum Board Ceiling
-  2x2 Acoustical Lay In Ceiling
-  Plaster/Stucco
-  Concealed Fastender Painted Metal Soffit
-  2x2 Fluorescent Fixture
-  Surface-Mounted Fluorescent Light Fixture
-  Recessed Can Light Fixture
-  HVAC Supply Grille
-  HVAC Return Grille
-  Exterior Wall Light
-  Interior Wall Light
-  Open to Structure (OTS)

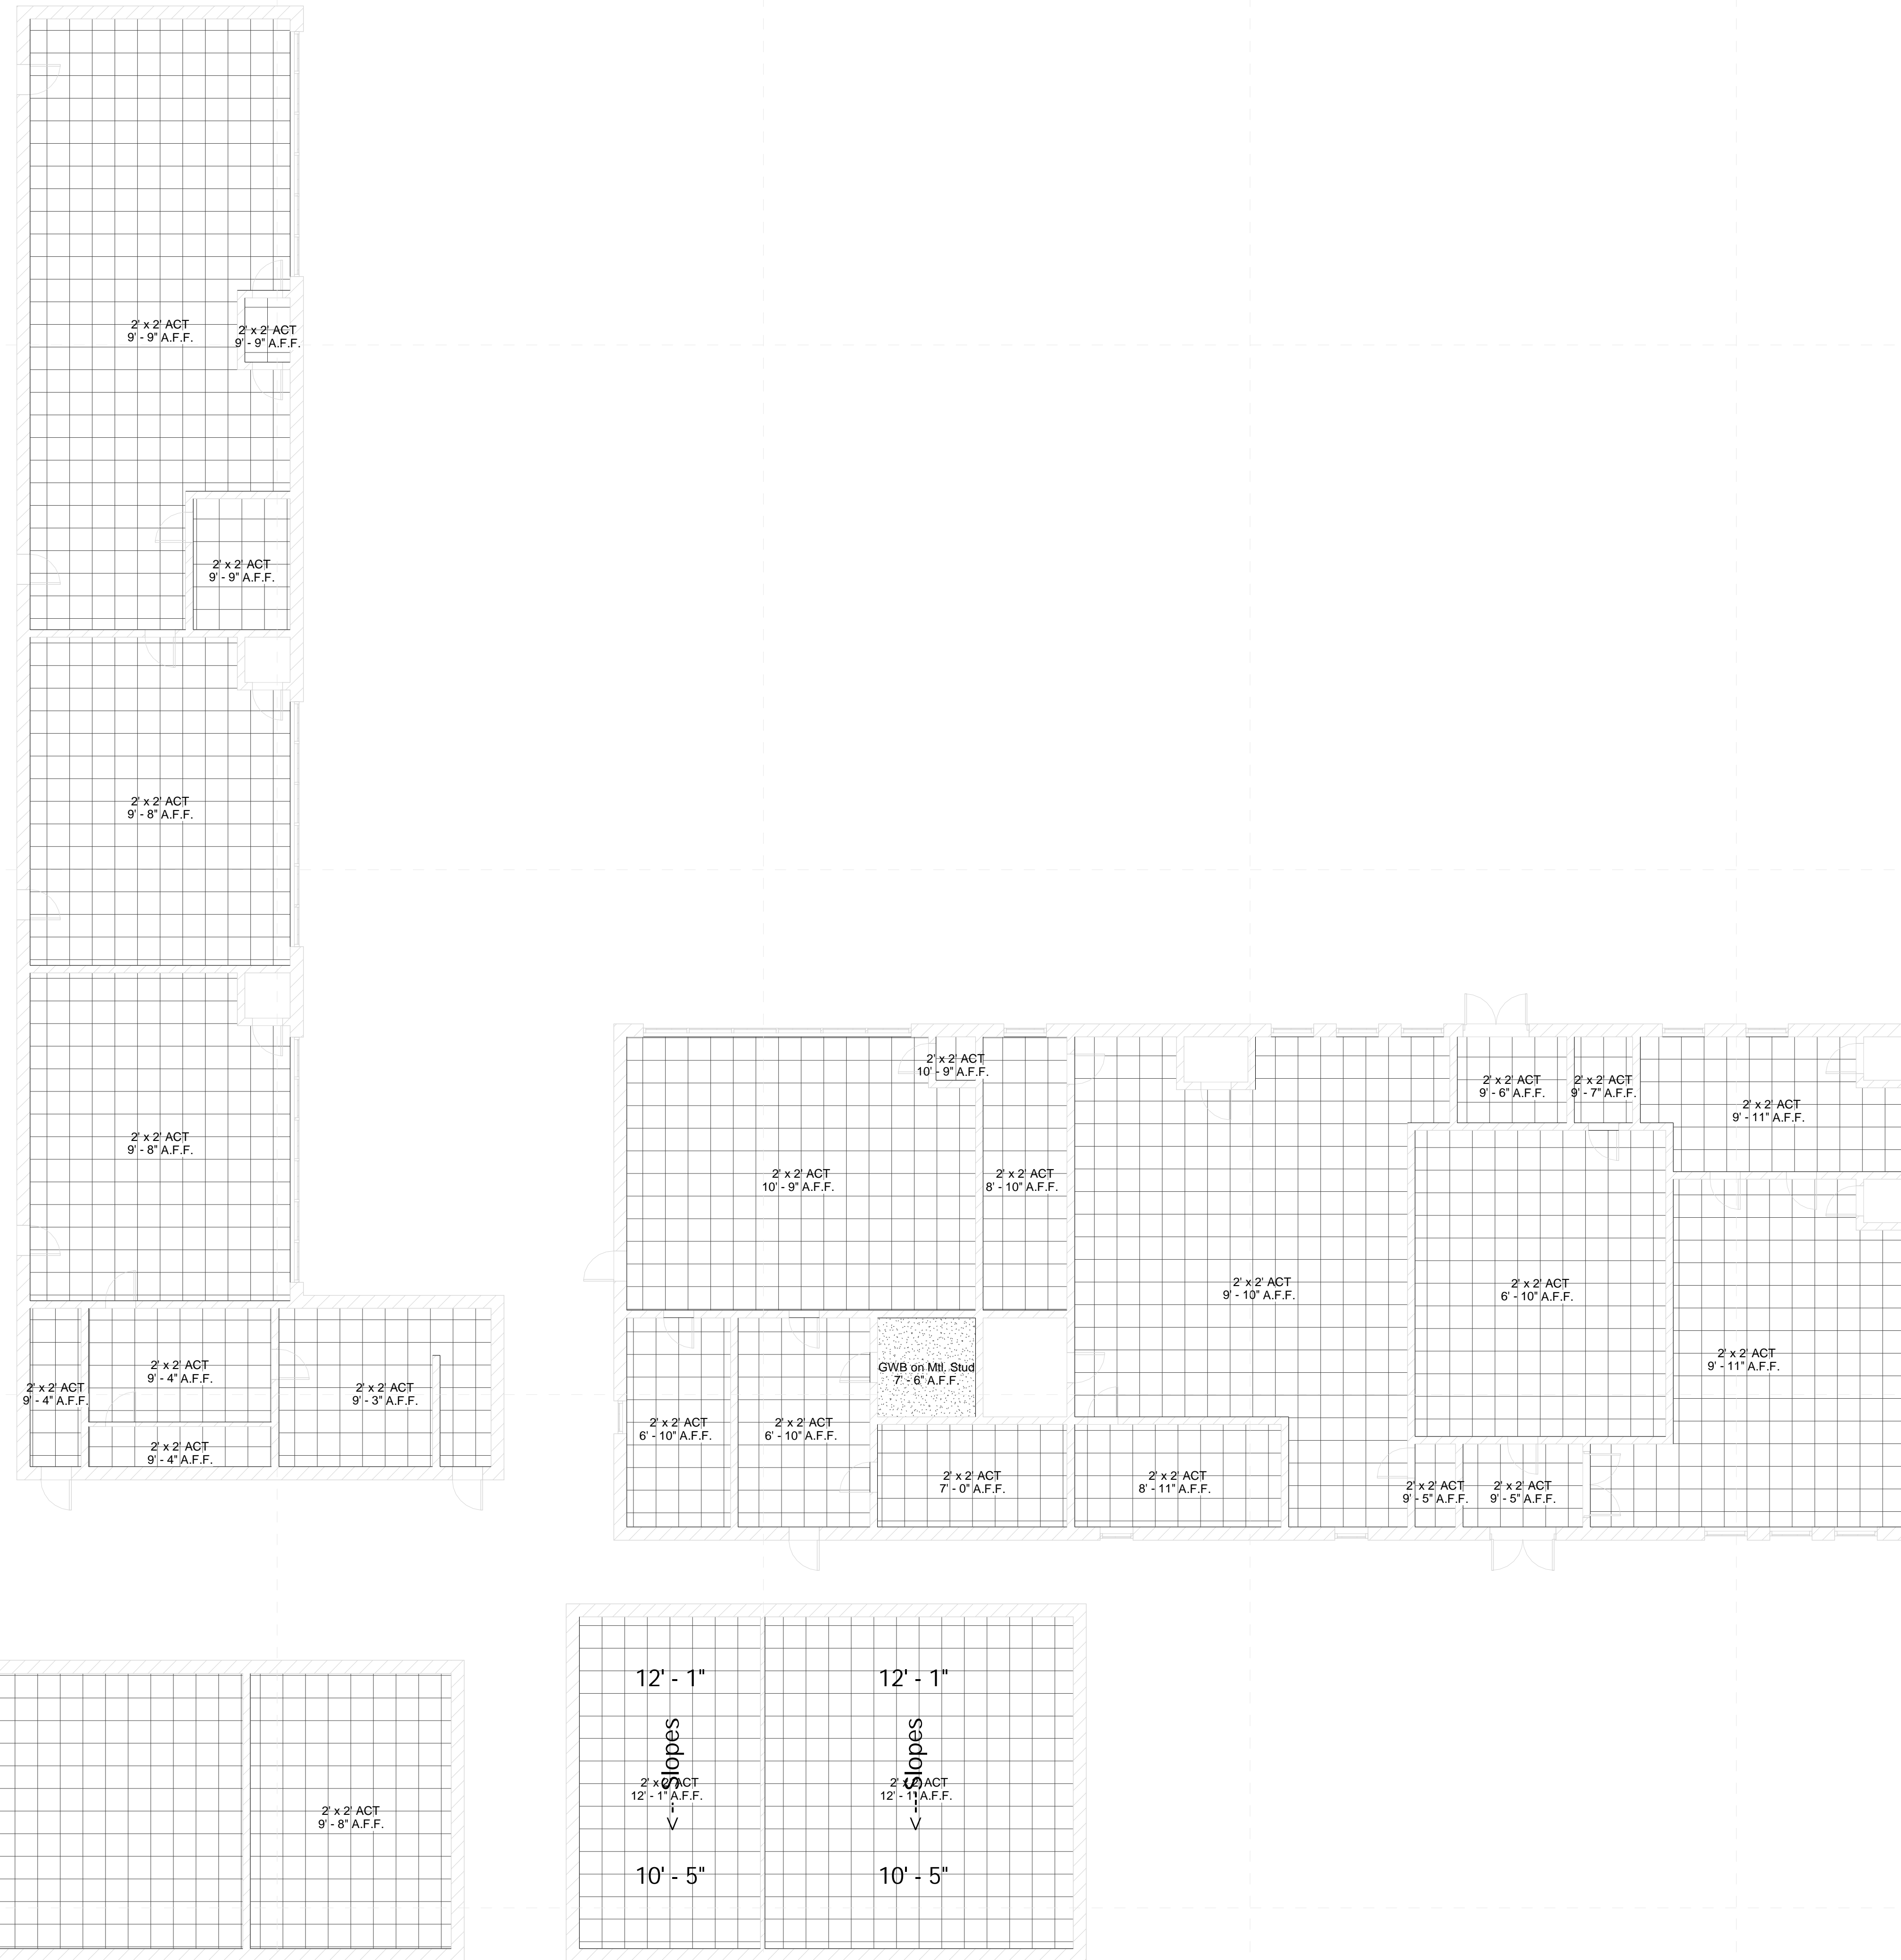

1 Main Floor - New - SE
1/8" = 1'-0"

10/5/2021 11:15:38 AM D:\my stuff\BUSINESS\work\2019\dalePartners\21027 - Sunflower County\models\21027 Gentry High School.rvt