


**General Plan Notes**

- All new interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All flooring is to extend underneath casework.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior control joint locations.
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- See AF series sheets for floor finish patterns.
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to interior finish face U.N.O.
- See Mechanical, Electrical, and Structural for full scope of Elementary Cafeteria.
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

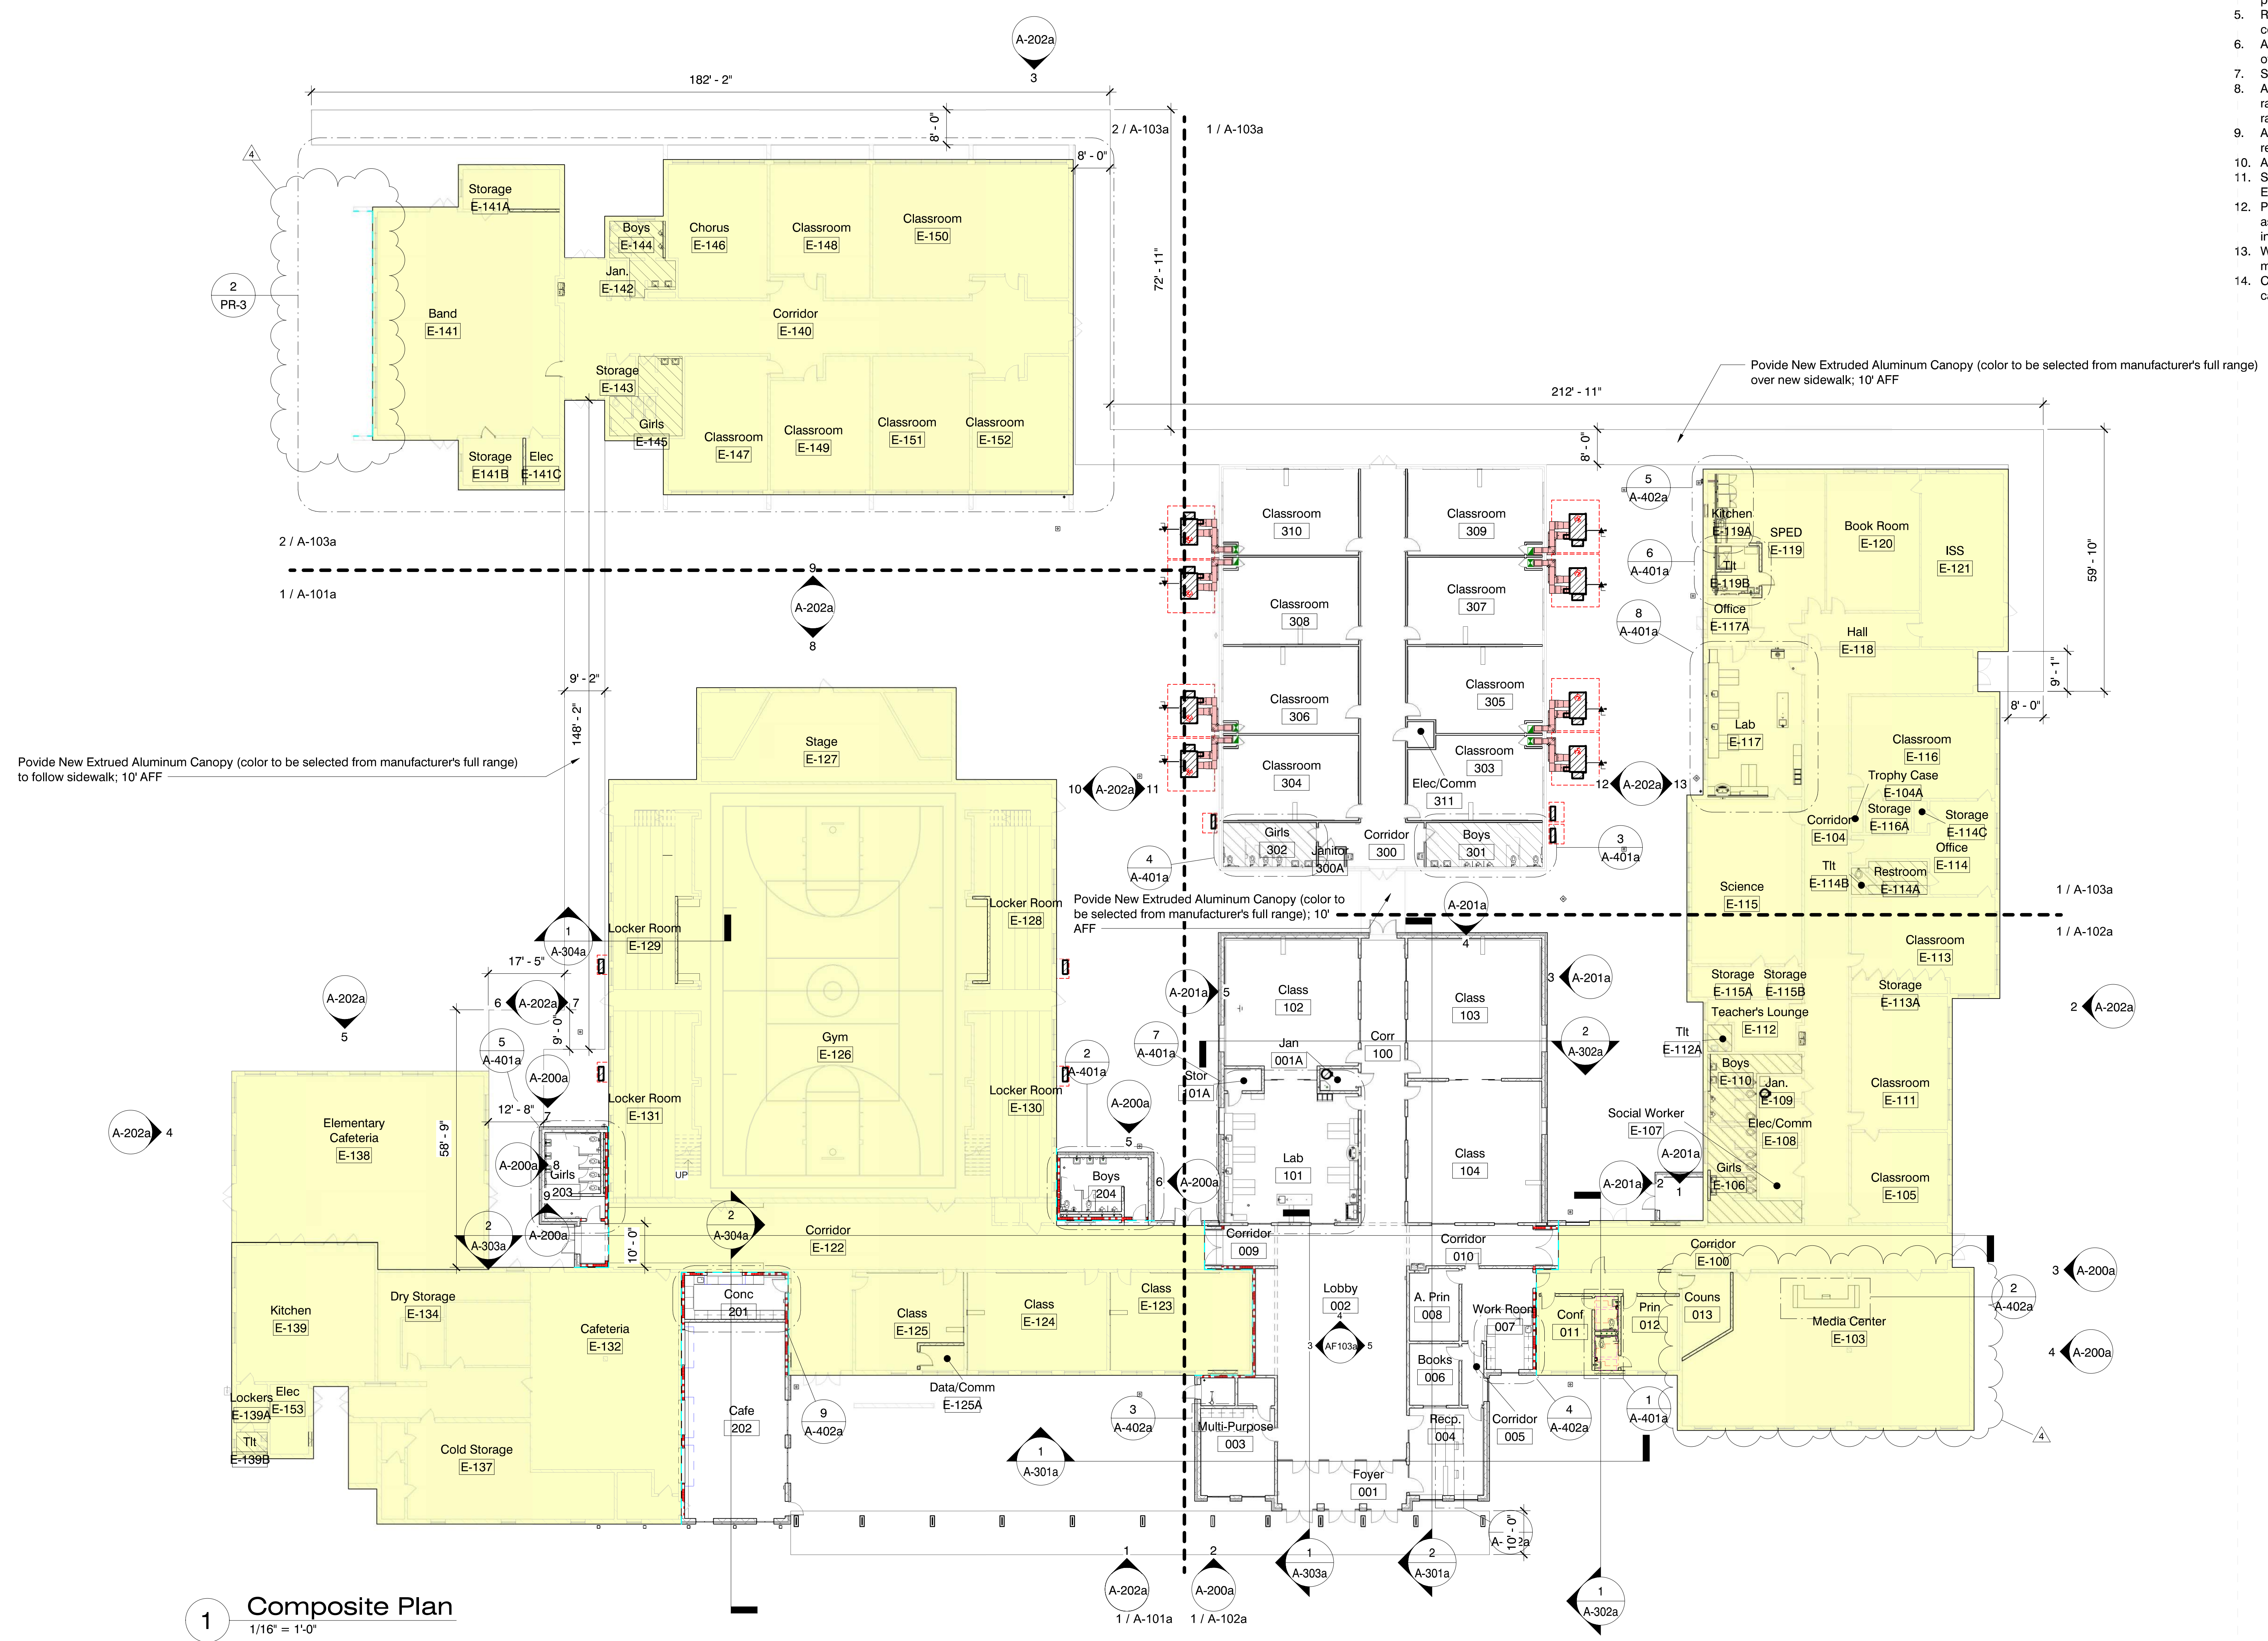

**1 Composite Plan**  
1/16" = 1'-0"

**Existing vs New Legend**

Existing to be renovated.

New construction.



100% CD's

Project No	21081.01
Date	May 24, 2022
Revisions	Rev Date
4	08/04/2022


8/25/2022 9:27:29 AM C:\Users\chancestokes\Documents\21081.01 Thomas Edwards High School\_ChanceStokes.rvt

**General Plan Notes**

- All new interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All flooring is to extend underneath casework.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior control joint locations.
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- See AF series sheets for floor finish patterns.
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to interior finish face U.N.O.
- See Mechanical, Electrical, and Structural for full scope of Elementary Cafeteria.
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**Specific Notes**

13 34 16.53 Bleachers

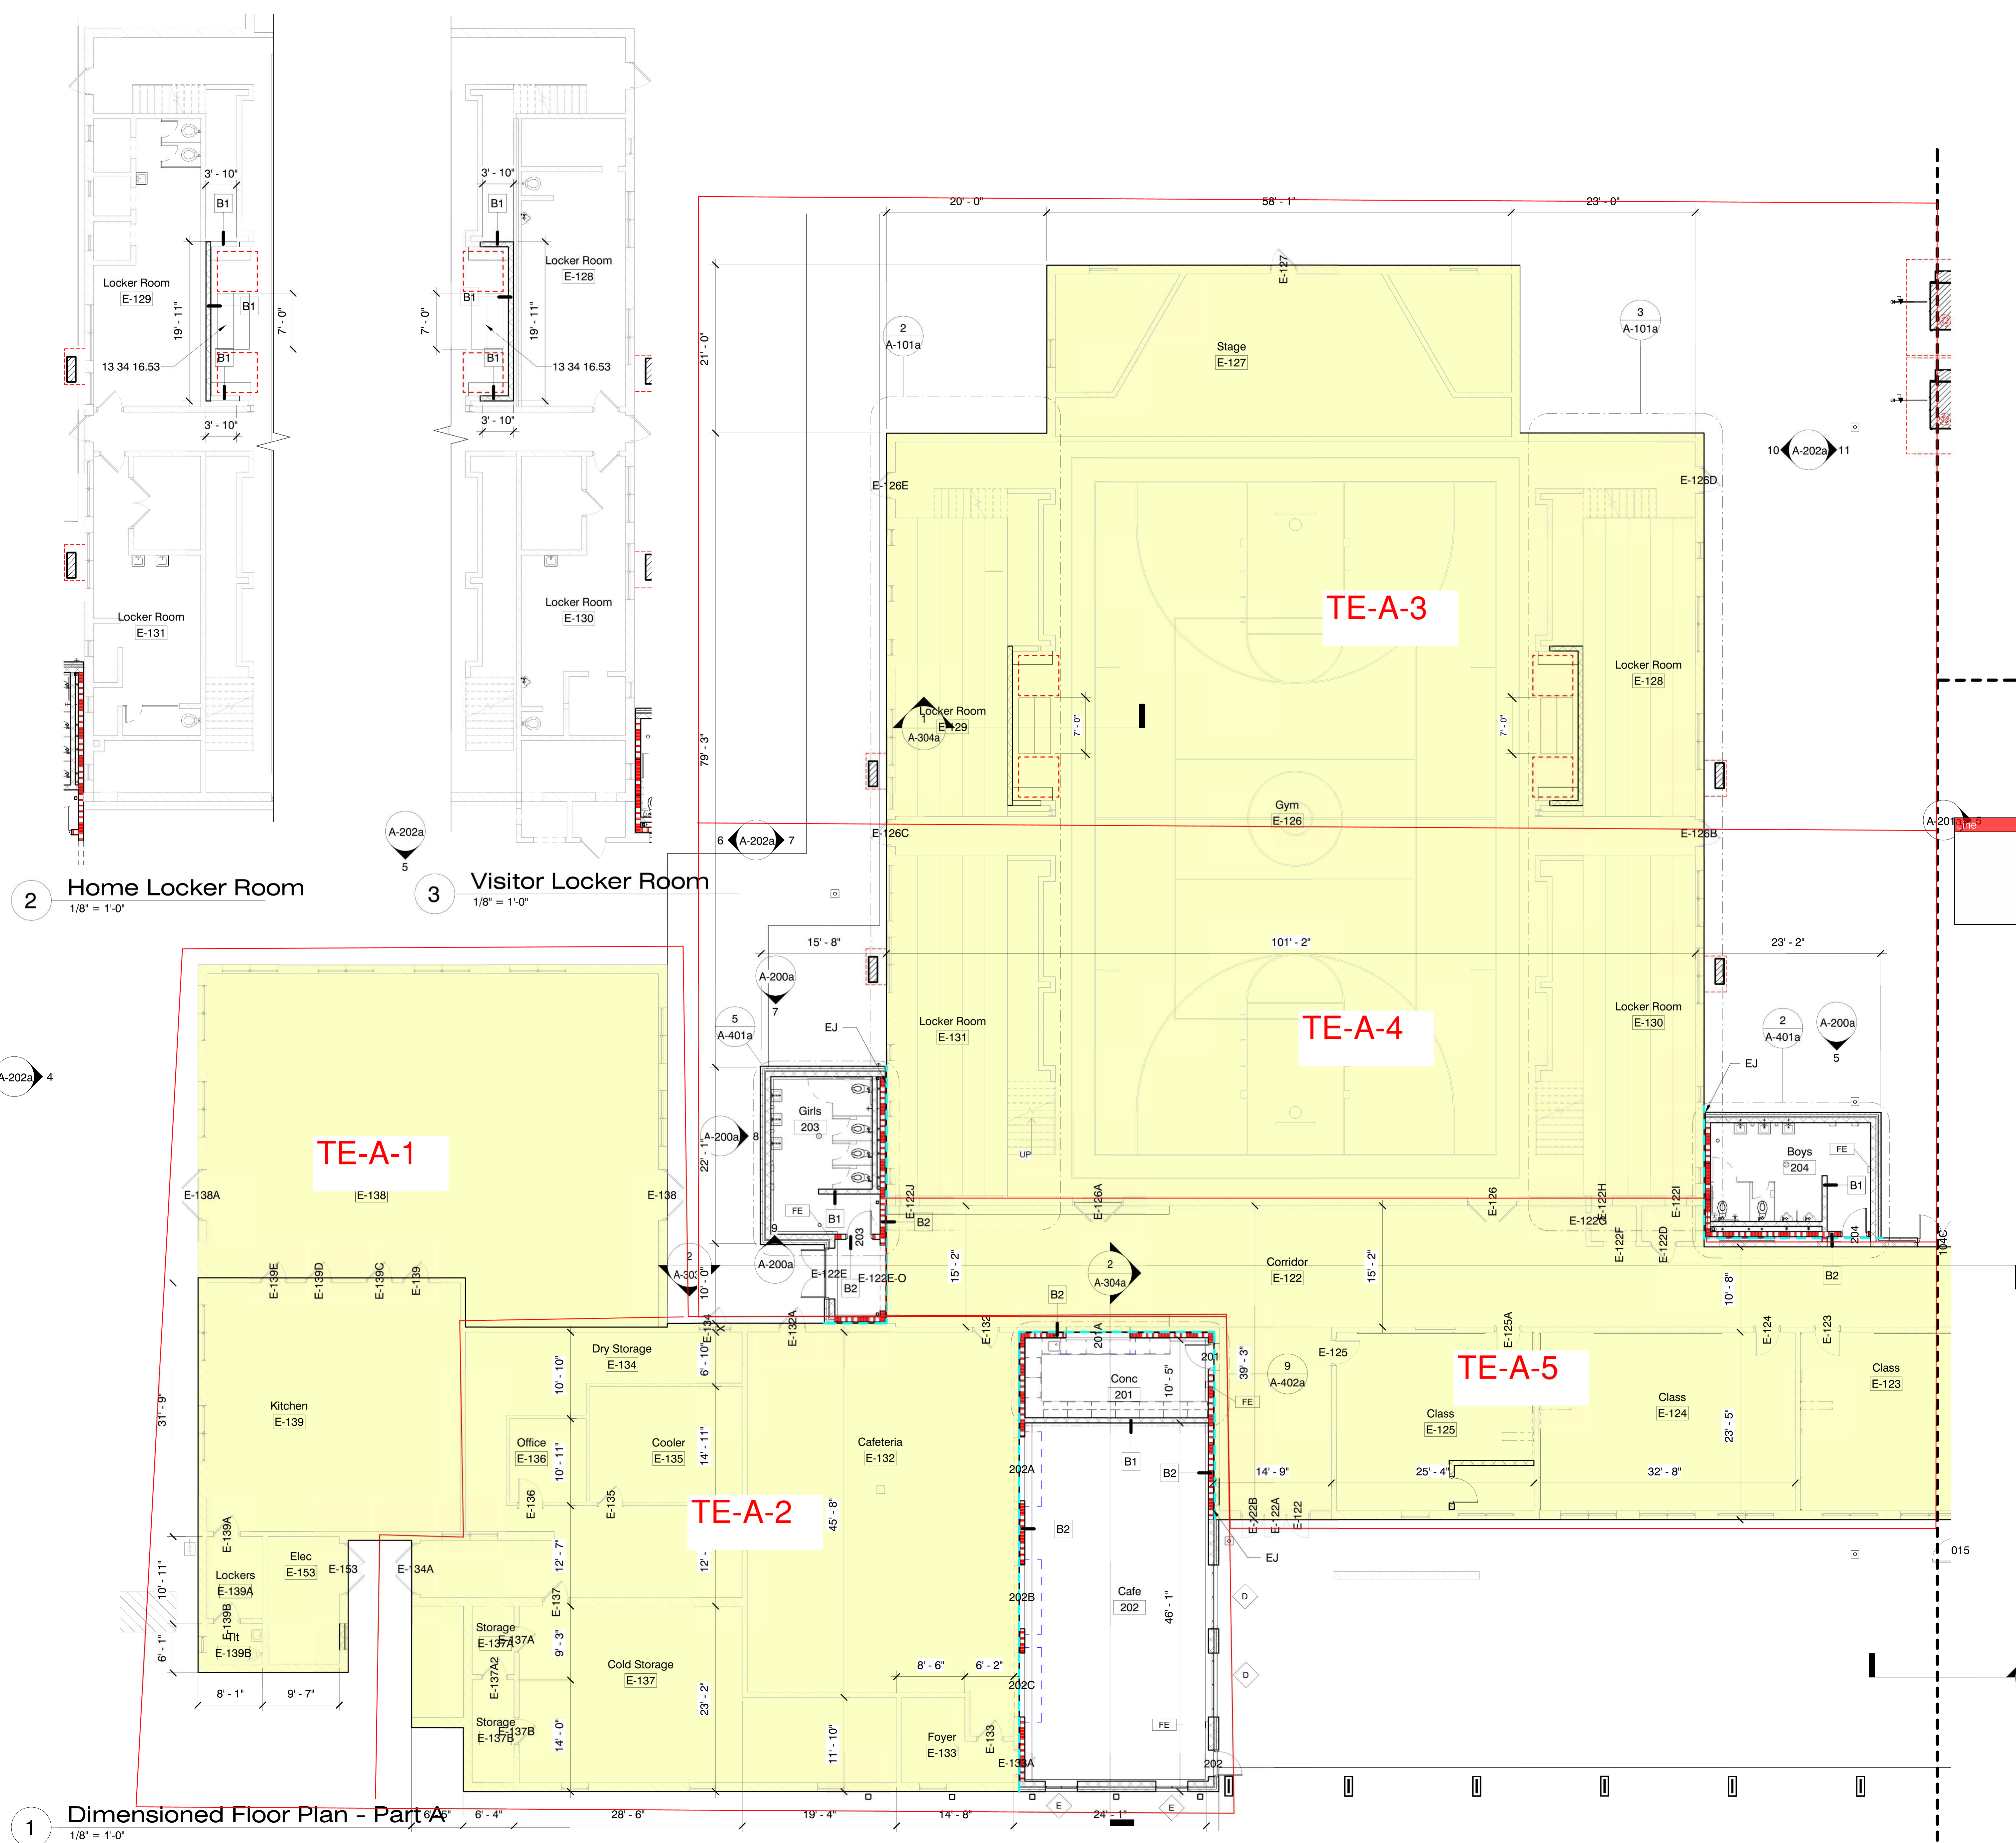

**2 Home Locker Room**  
1/8" = 1'-0"

**3 Visitor Locker Room**  
1/8" = 1'-0"

**1 Dimensioned Floor Plan - Part A**  
1/8" = 1'-0"

**Existing vs New Legend**


- Existing to be renovated.
- New construction.



100% CD's

Project No	21081.01
Date	May 24, 2022
Revisions	Rev Date

8/25/2022 9:27:45 AM C:\Users\chancestokes\Documents\21081.01 Thomas Edwards High School\_ChancesStokes.rvt

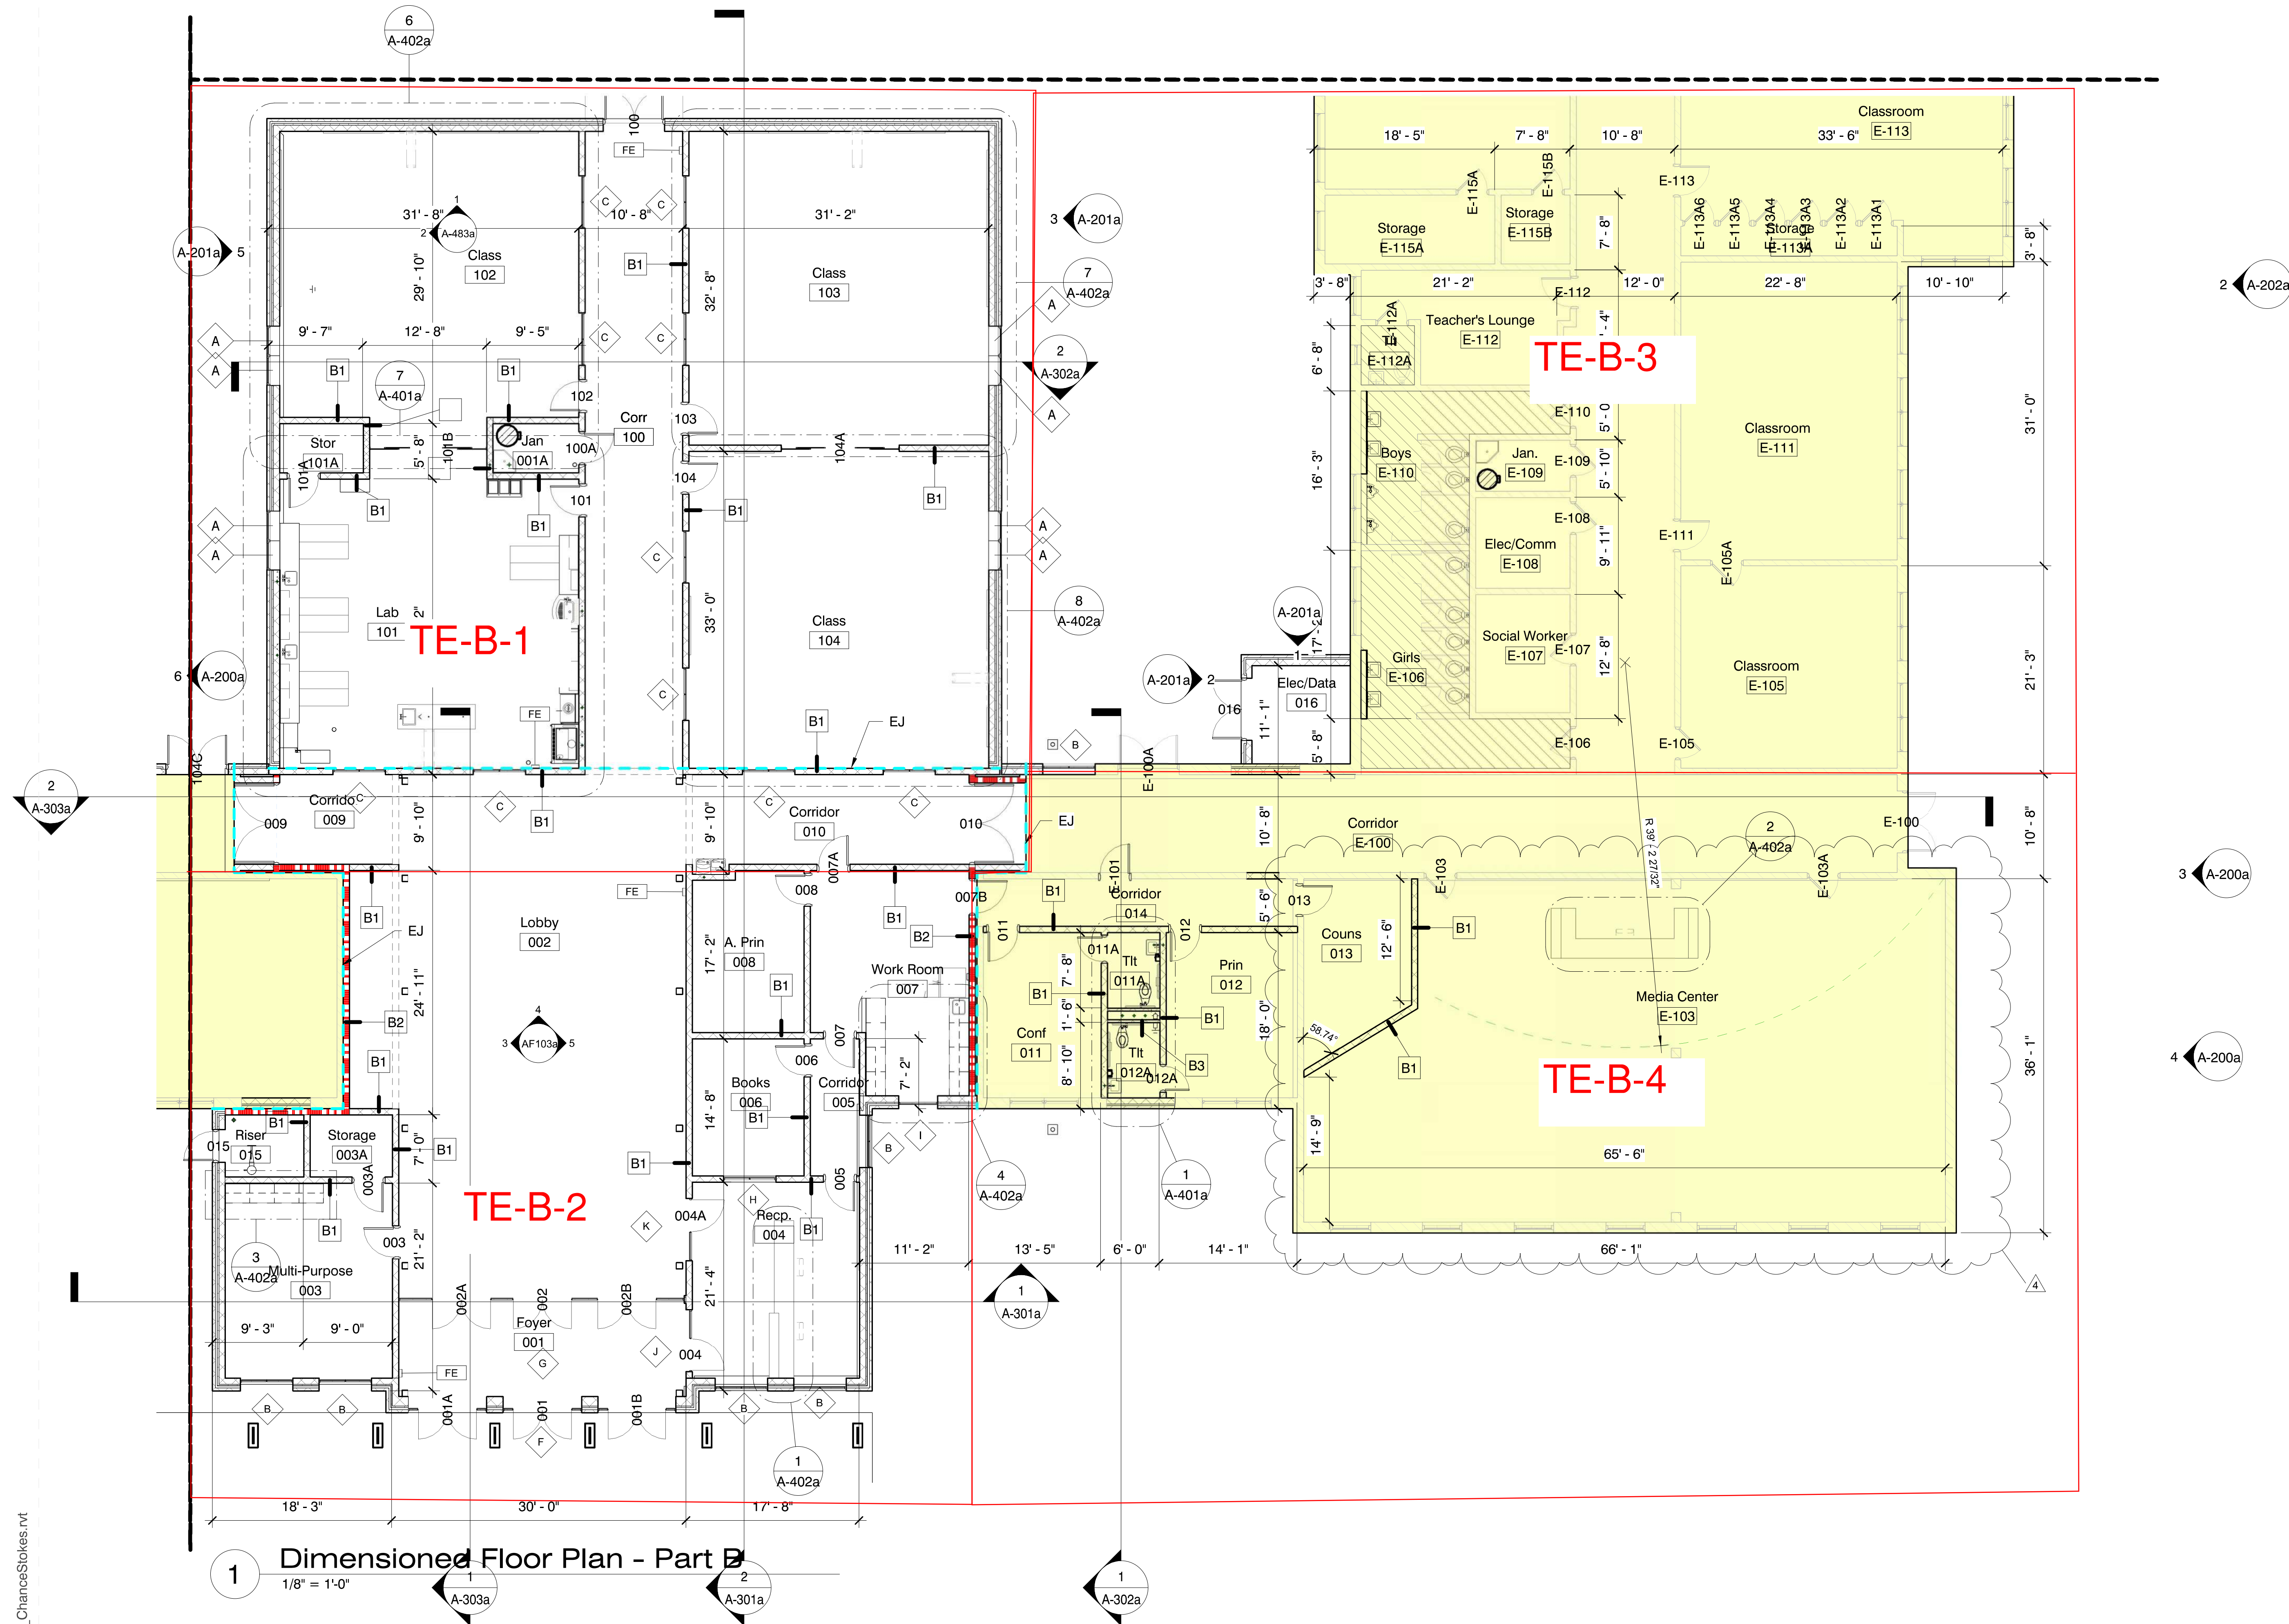


1 Dimensioned Floor Plan - Part B  
 1/8" = 1'-0"

General Plan Notes

- All new interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All flooring is to extend underneath casework.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior control joint locations.
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- See AF series sheets for floor finish patterns.
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to interior finish face U.N.O.
- See Mechanical, Electrical, and Structural for full scope of Elementary Cafeteria.
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.



Architects  
 One Jackson Place 250  
 188 East Capitol Street  
 Jackson, MS 39201  
 p 601.352.5411  
 201 Park Court Suite B  
 Ridgeland, MS 39157  
 p 601.790.9432  
 161 Lameuse St. Suite 201  
 Biloxi, MS 39530  
 p 228.374.1409  
 dalebaileyplans.com

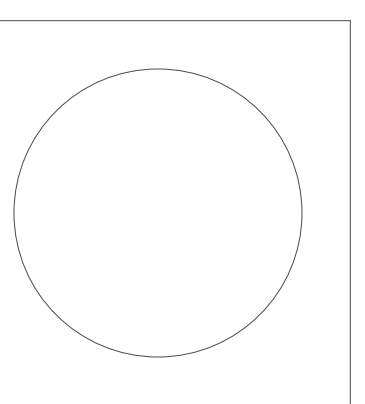

Sunflower County Consolidated School District Bond Issue  
**21081.01 Thomas Edwards High School**  
 Ruleville, MS





100% CD's

Project No	21081.01
Date	May 24, 2022
Revisions	Rev Date
4	08/04/2022


Existing vs New Legend

- Existing to be renovated.
- New construction.




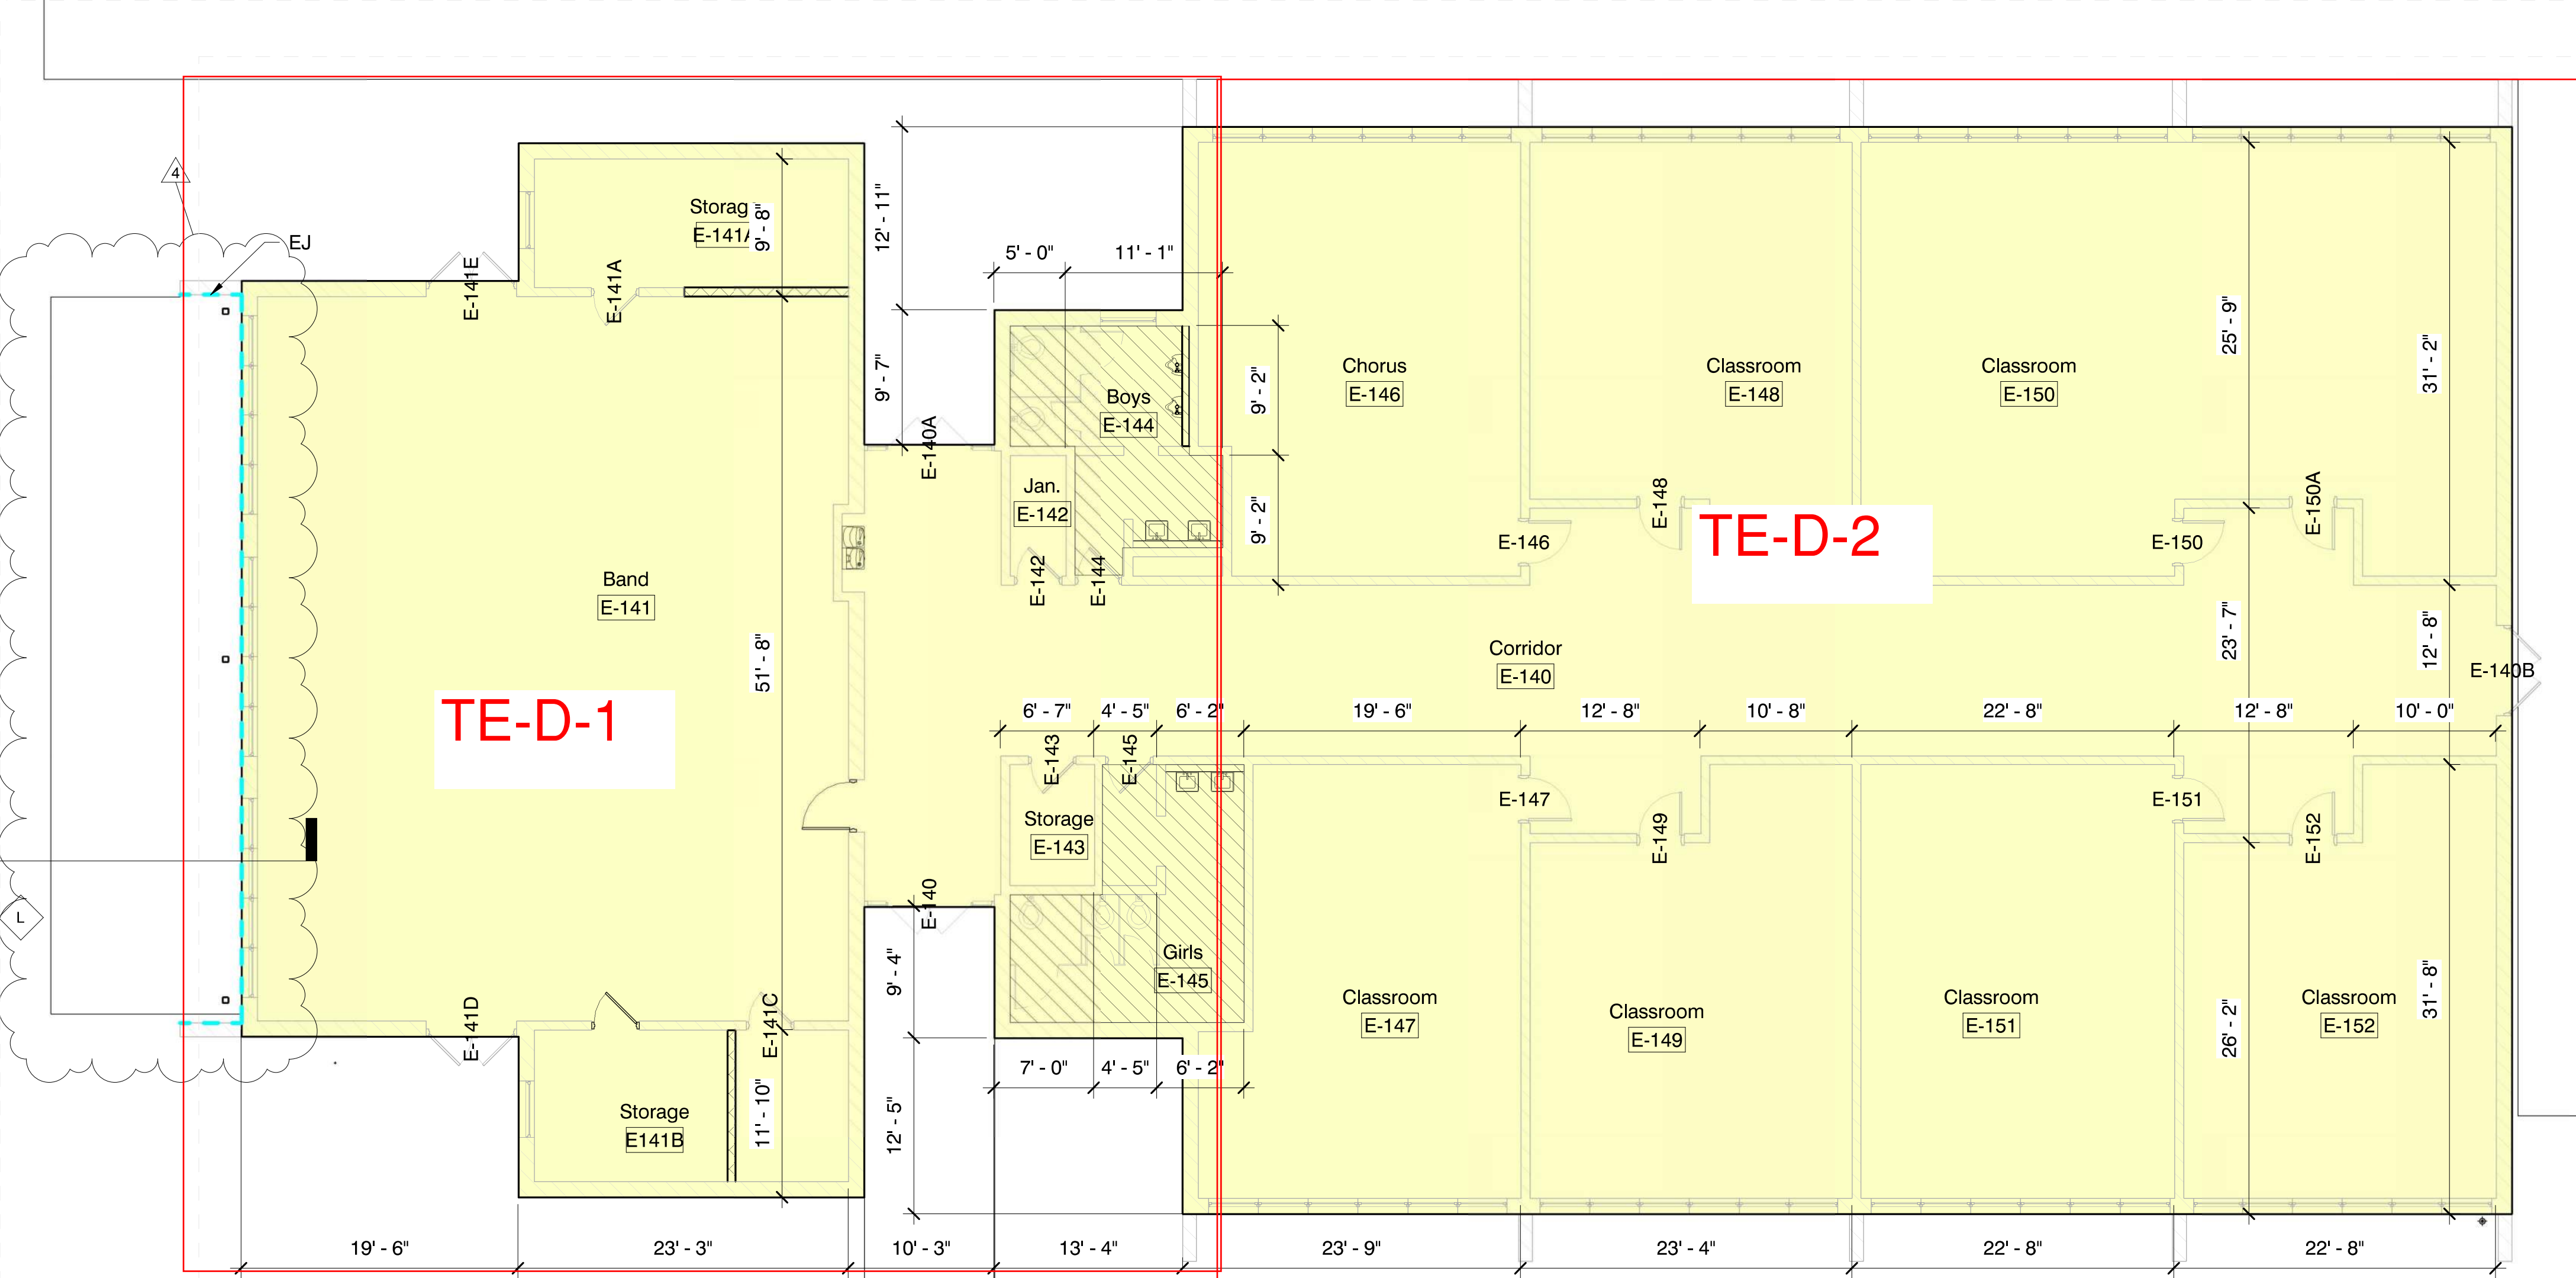

2 Dimensioned Floor Plan - Part D  
1/8" = 1'-0"

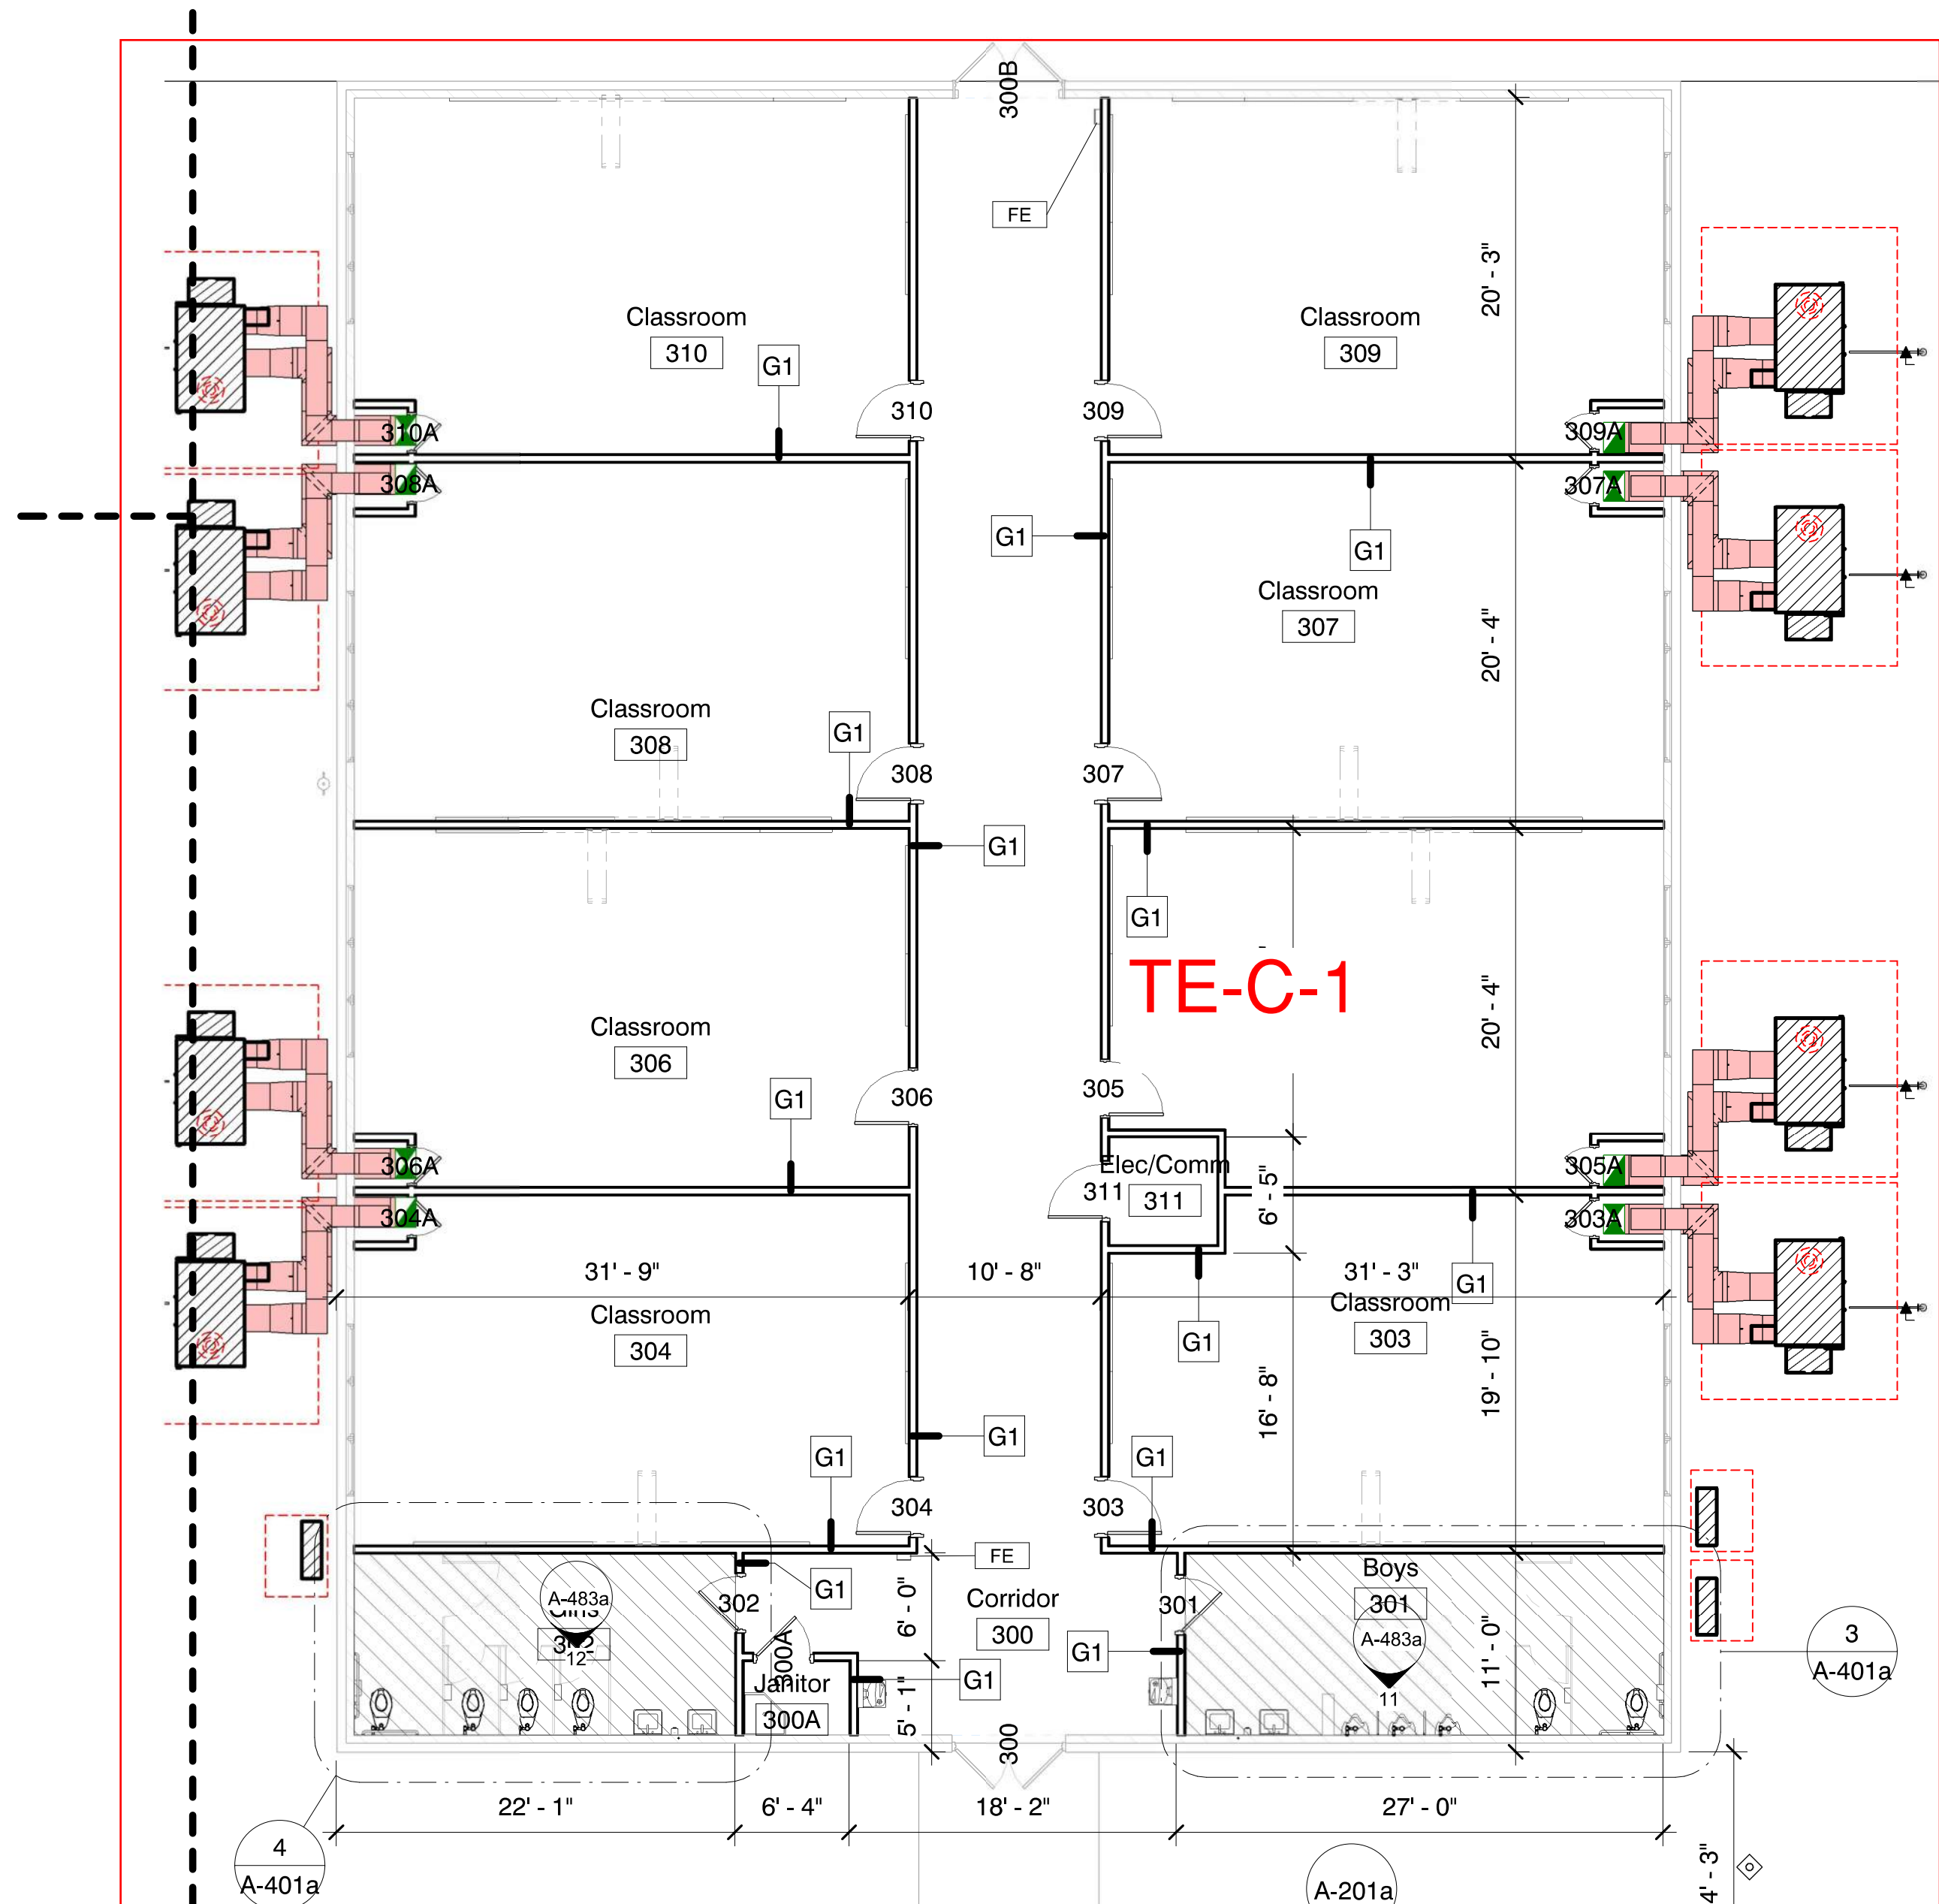

1 Dimensioned Floor Plan - Part C  
1/8" = 1'-0"

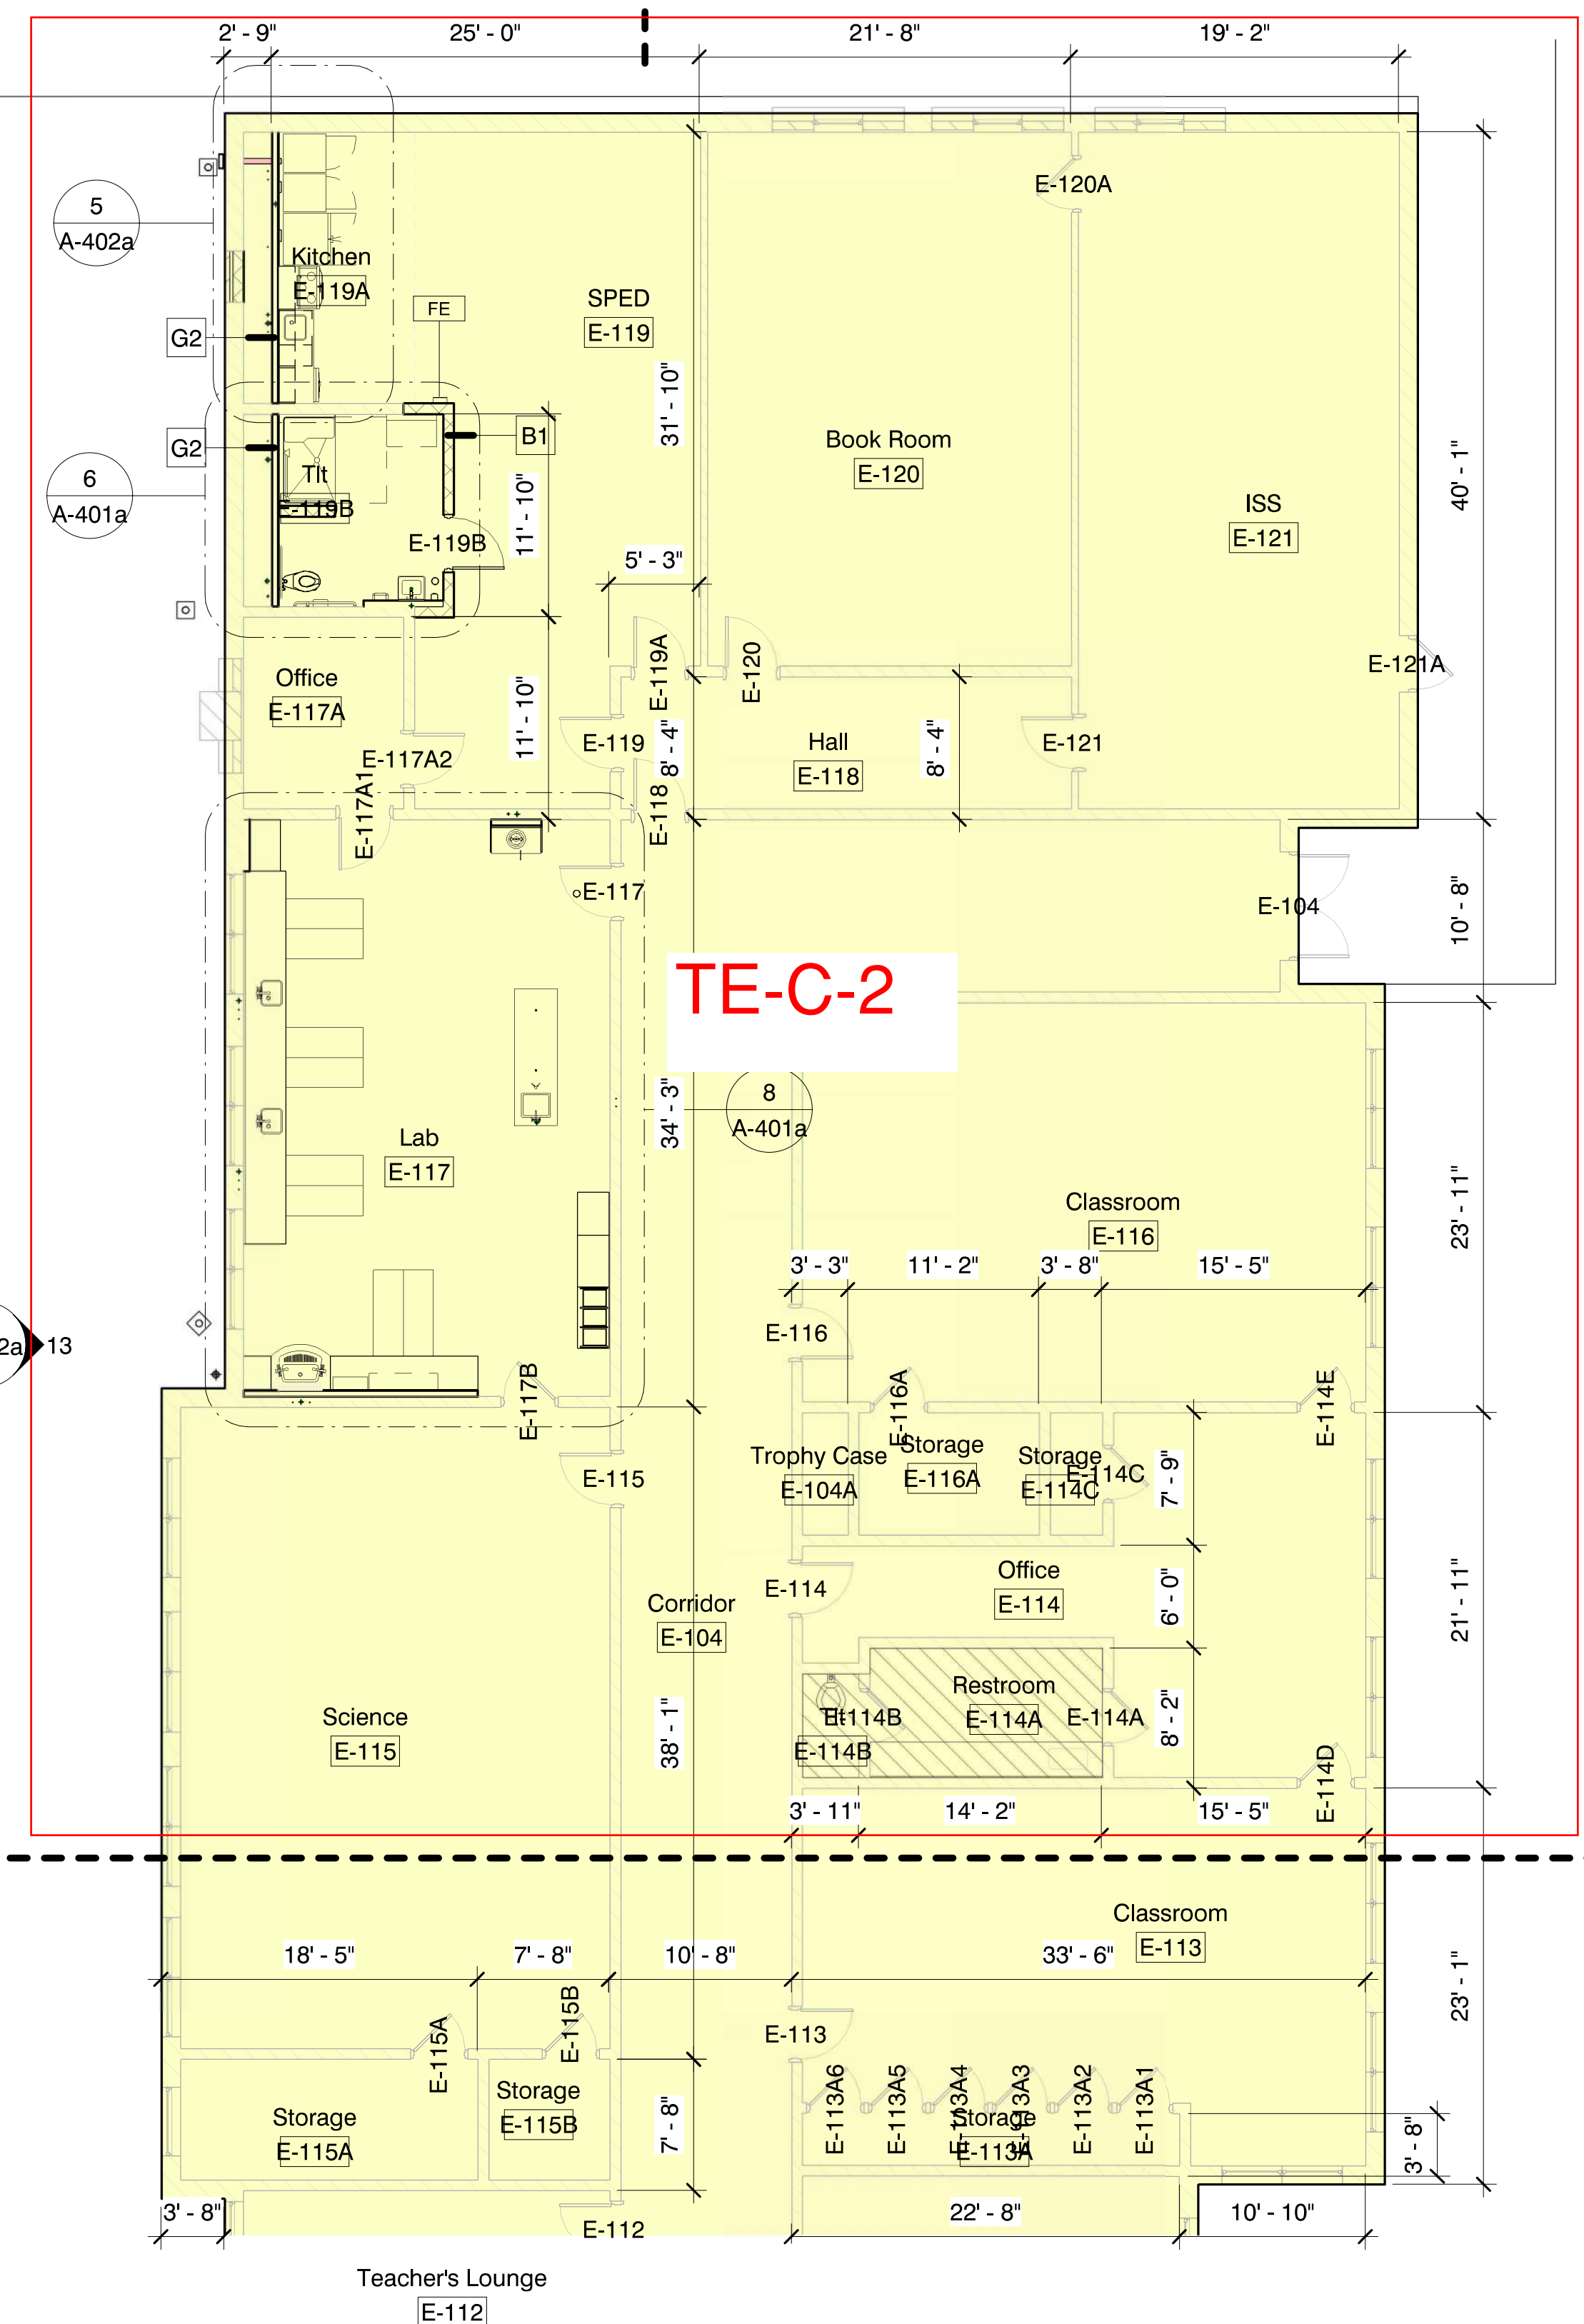

2 A-202a

General Plan Notes


- All new interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All flooring is to extend underneath casework.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior control joint locations.
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- See AF series sheets for floor finish patterns.
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to interior finish face U.N.O.
- See Mechanical, Electrical, and Structural for full scope of Elementary Cafeteria.
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

Existing vs New Legend

- Existing to be renovated.
- New construction.



8/25/2022 9:27:57 AM C:\Users\chancestokes\Documents\21081.01 Thomas Edwards High School\_ChancesStokes.rvt






**General Plan Notes**


- All interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to the face of masonry
- Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
- Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
- Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
- Typ. Earth Grade Shall be 6" min. Below FFE
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**Plan Legend**

- New Building
- Existing Building to be Renovated
- Lighting, Ceiling, Plumbing, and Mechanical Work Not in Contract. (ESSER) All other architectural work, such as new flooring, painting, etc. falls under this bond issue.

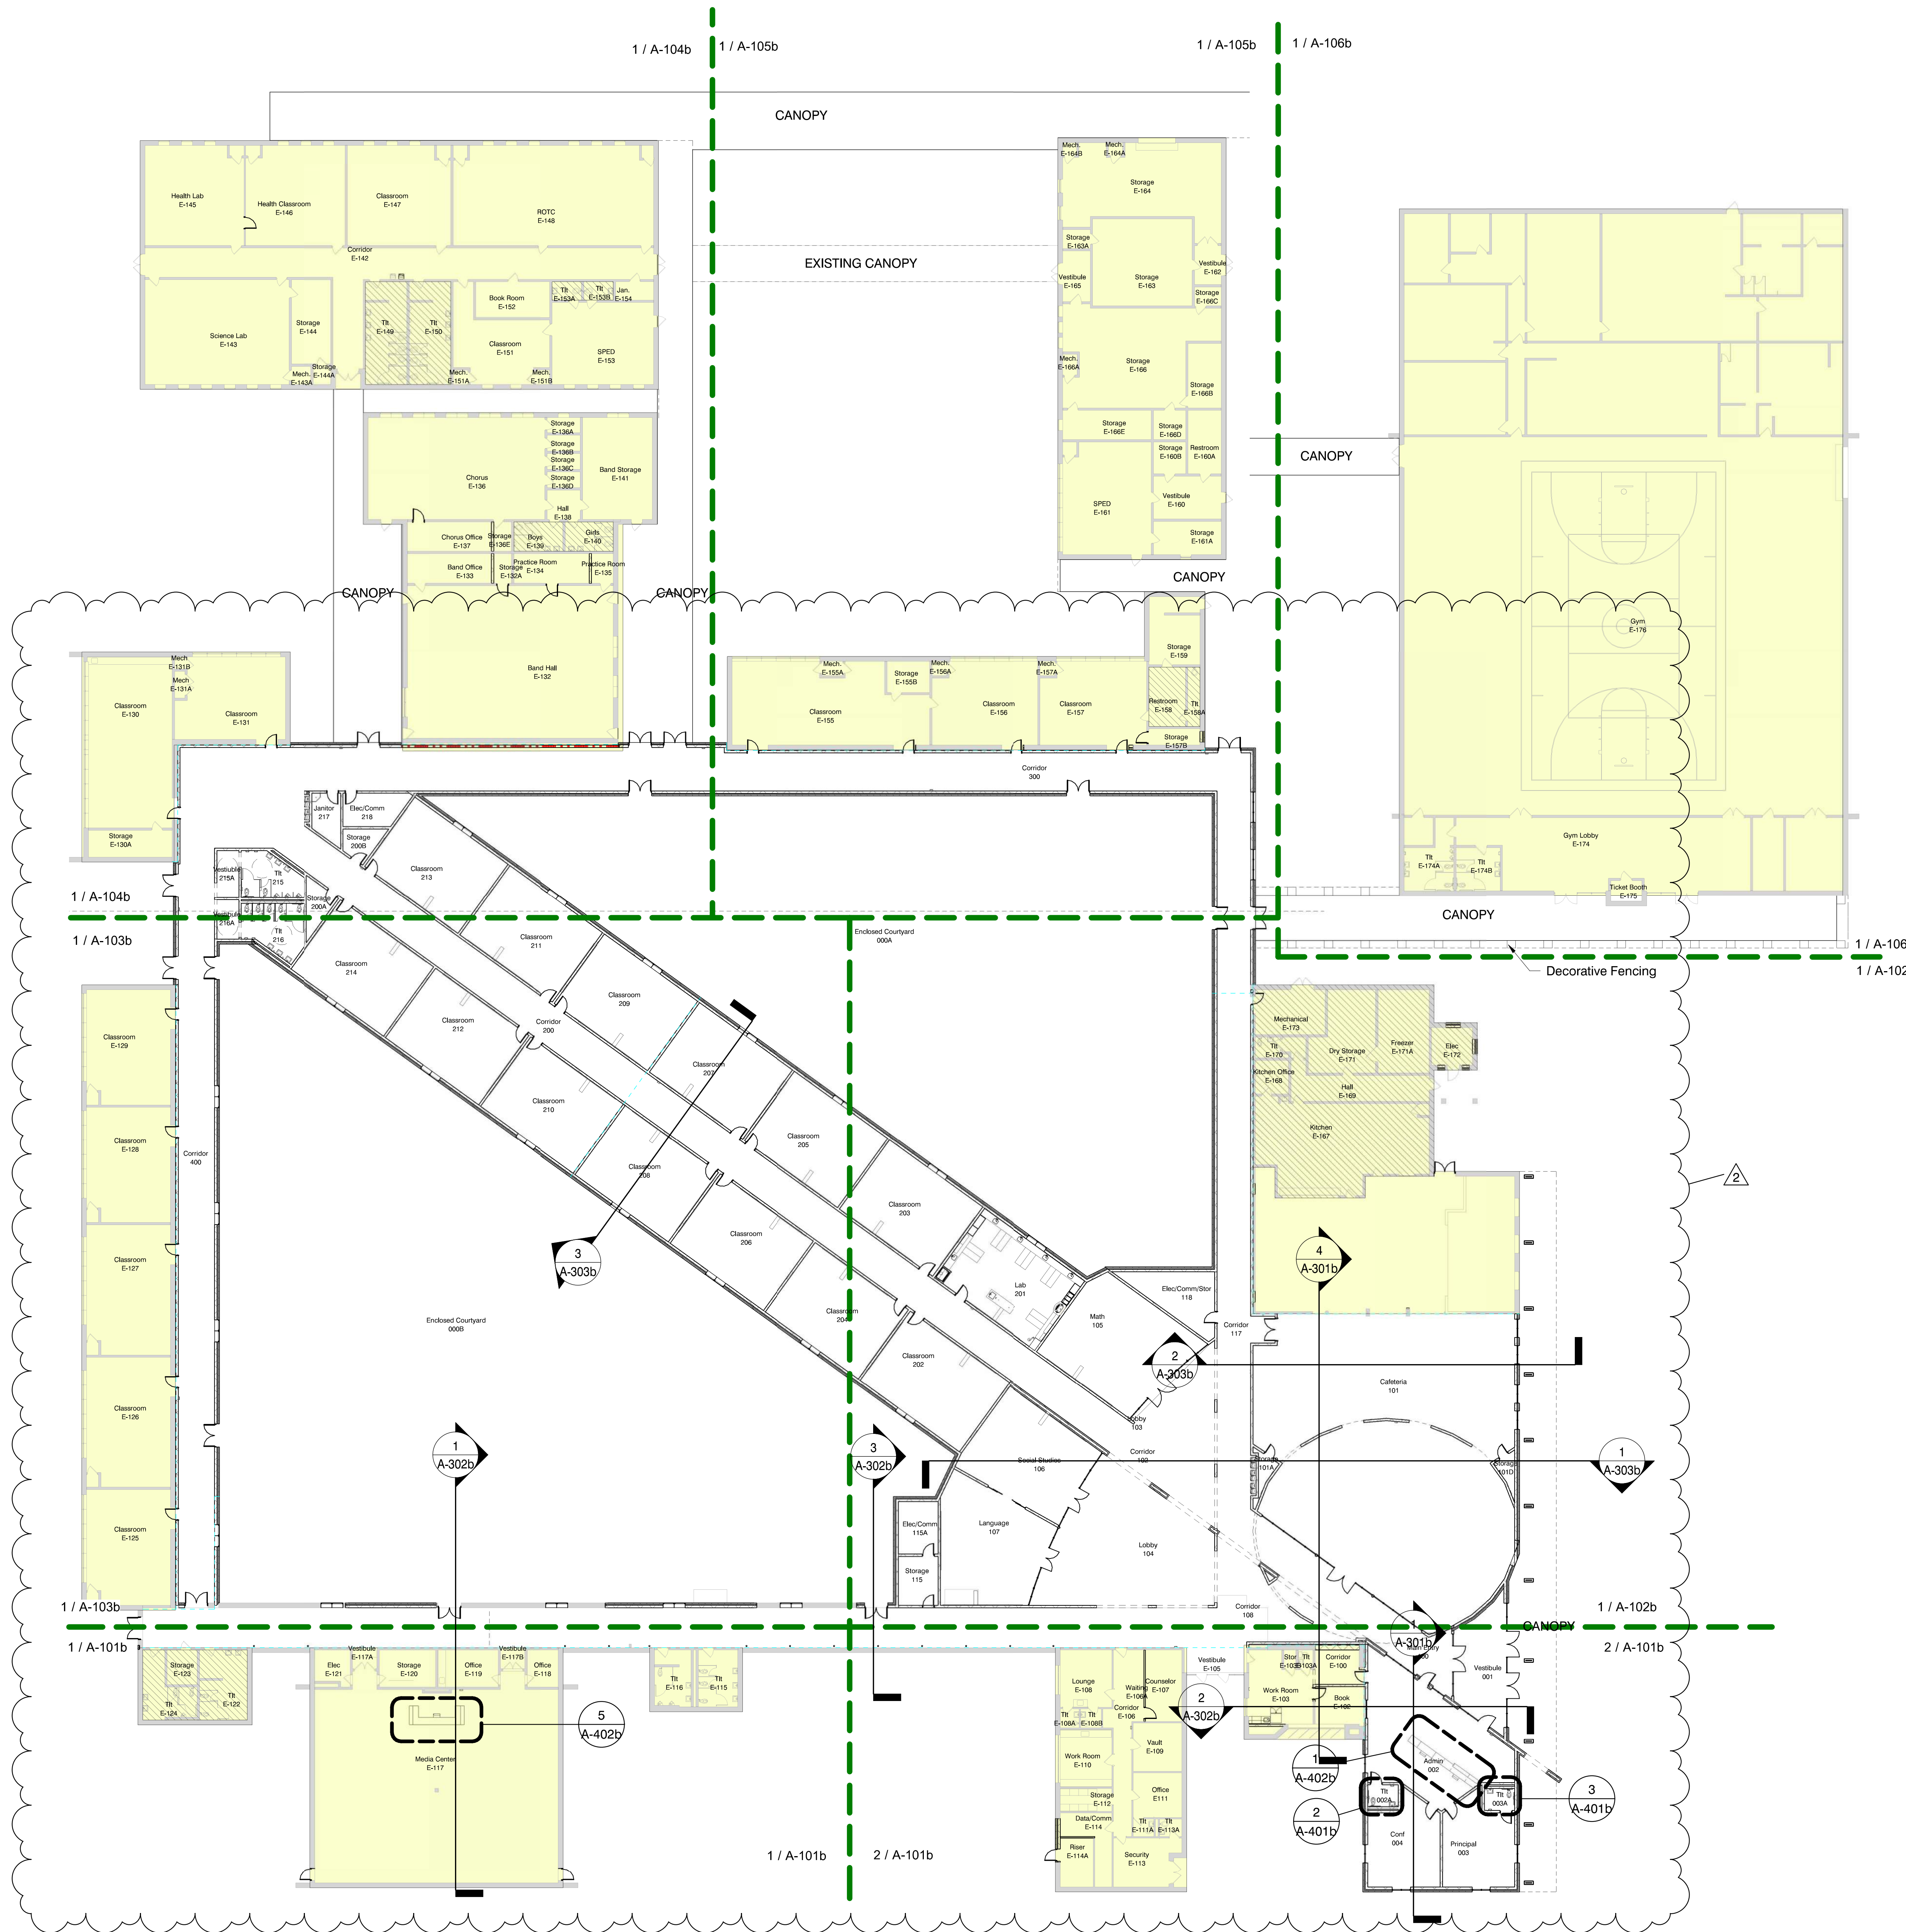

**1 Composite Floor Plan**  
1" = 20'-0"



8/25/2022 11:02:03 AM C:\Users\chancestokes\Documents\21081.02 Gentry High School\_ChanceStokes.rvt




**General Plan Notes**


- All interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- Reference Interior Elevations for Marker/Board, Tackboard, and Smart Board Dimensions and Locations
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to the face of masonry.
- Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
- Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
- Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
- Typ. Earth Grade Shall be 6" min. Below FFE
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**Plan Legend**



- New Building
- Existing Building to be Renovated
- Lighting, Ceiling, Plumbing, and Mechanical Work Not in Contract. (ESSER) All other architectural work, such as new flooring, painting, etc. falls under this bond issue.

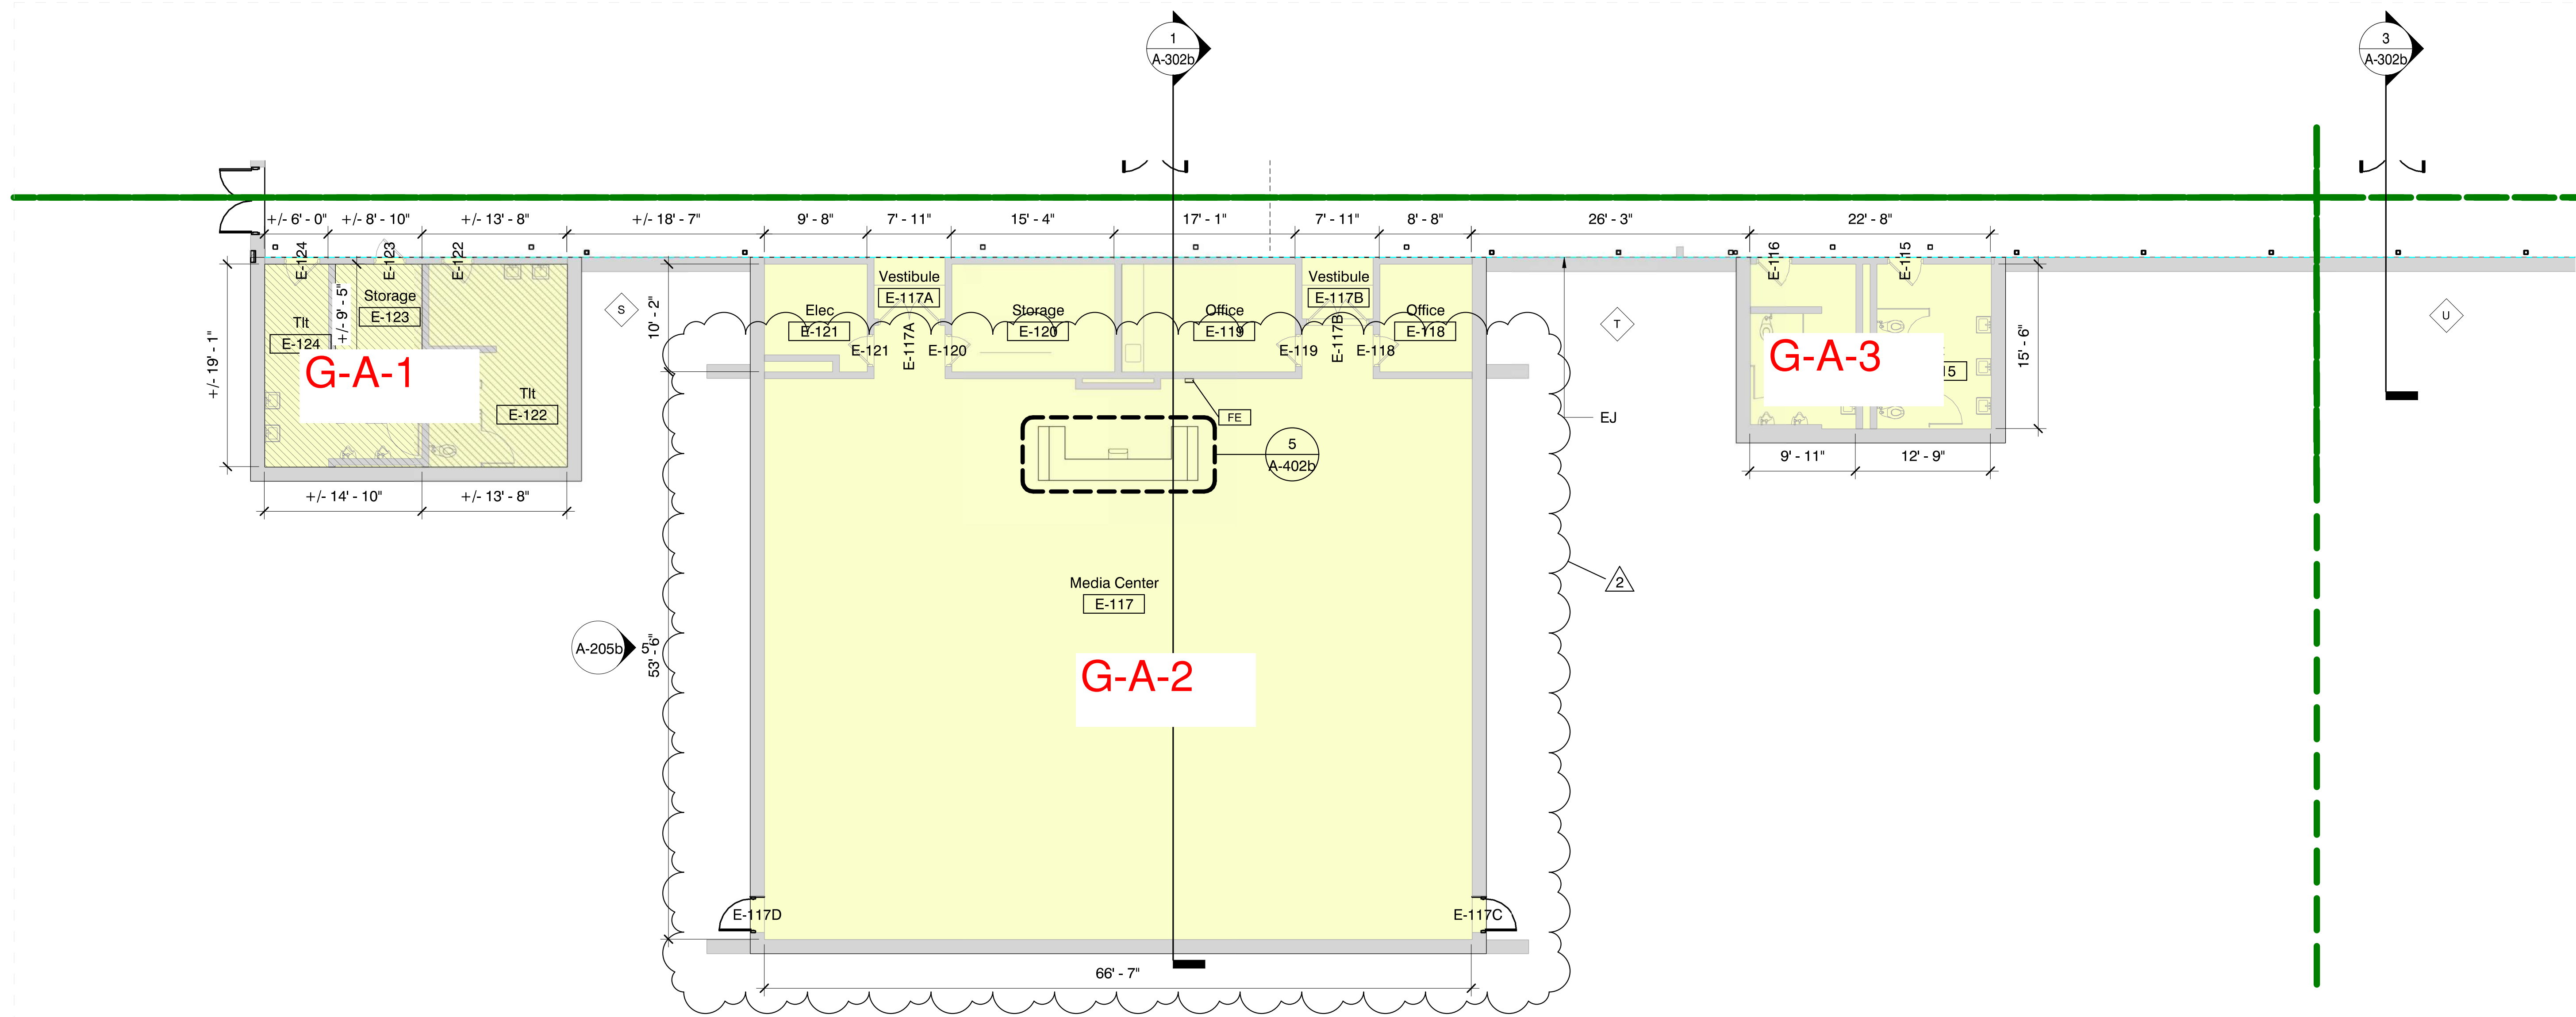


**1 Composite Floor Plan - Part A**  
1/8" = 1'-0"

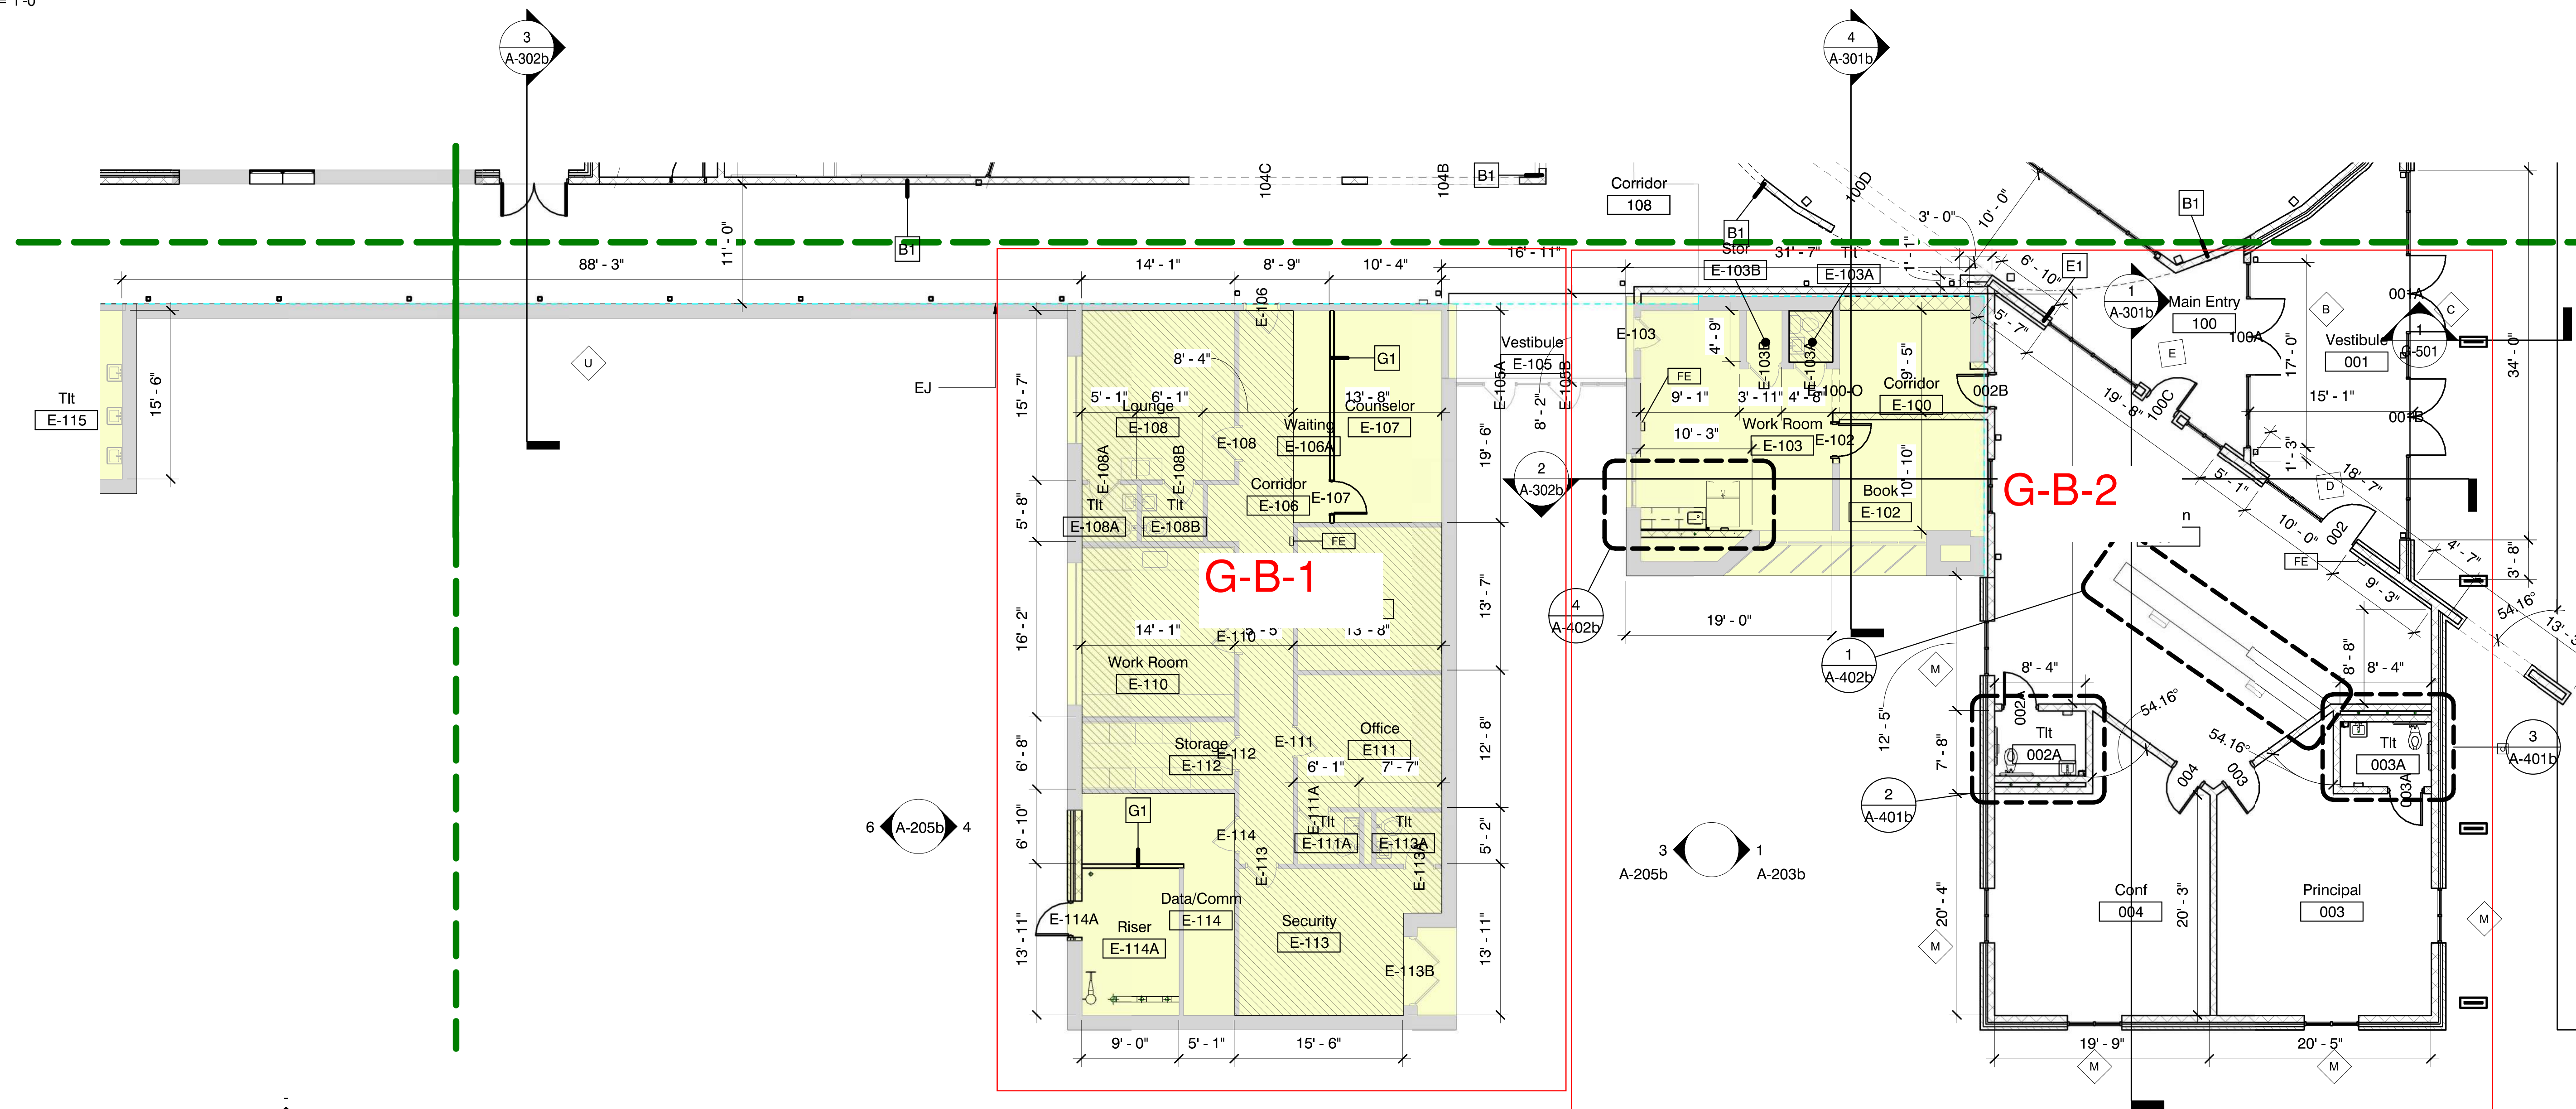

**2 Composite Floor Plan - Part B**  
1/8" = 1'-0"

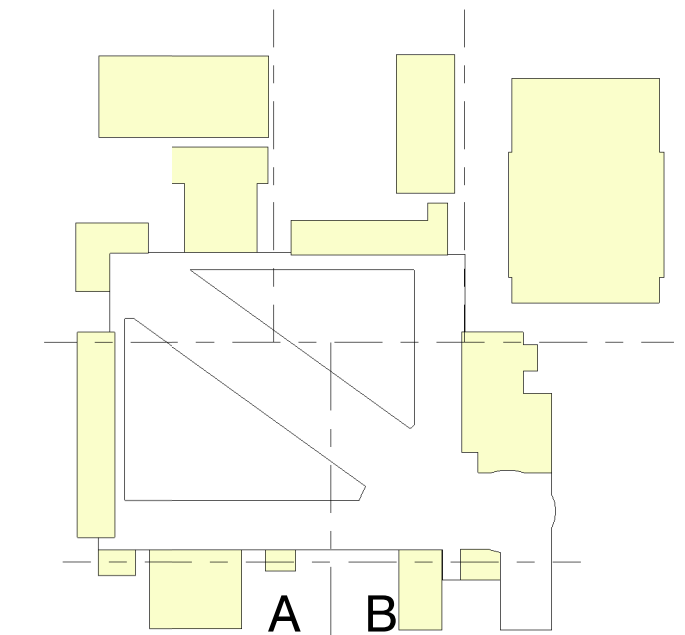

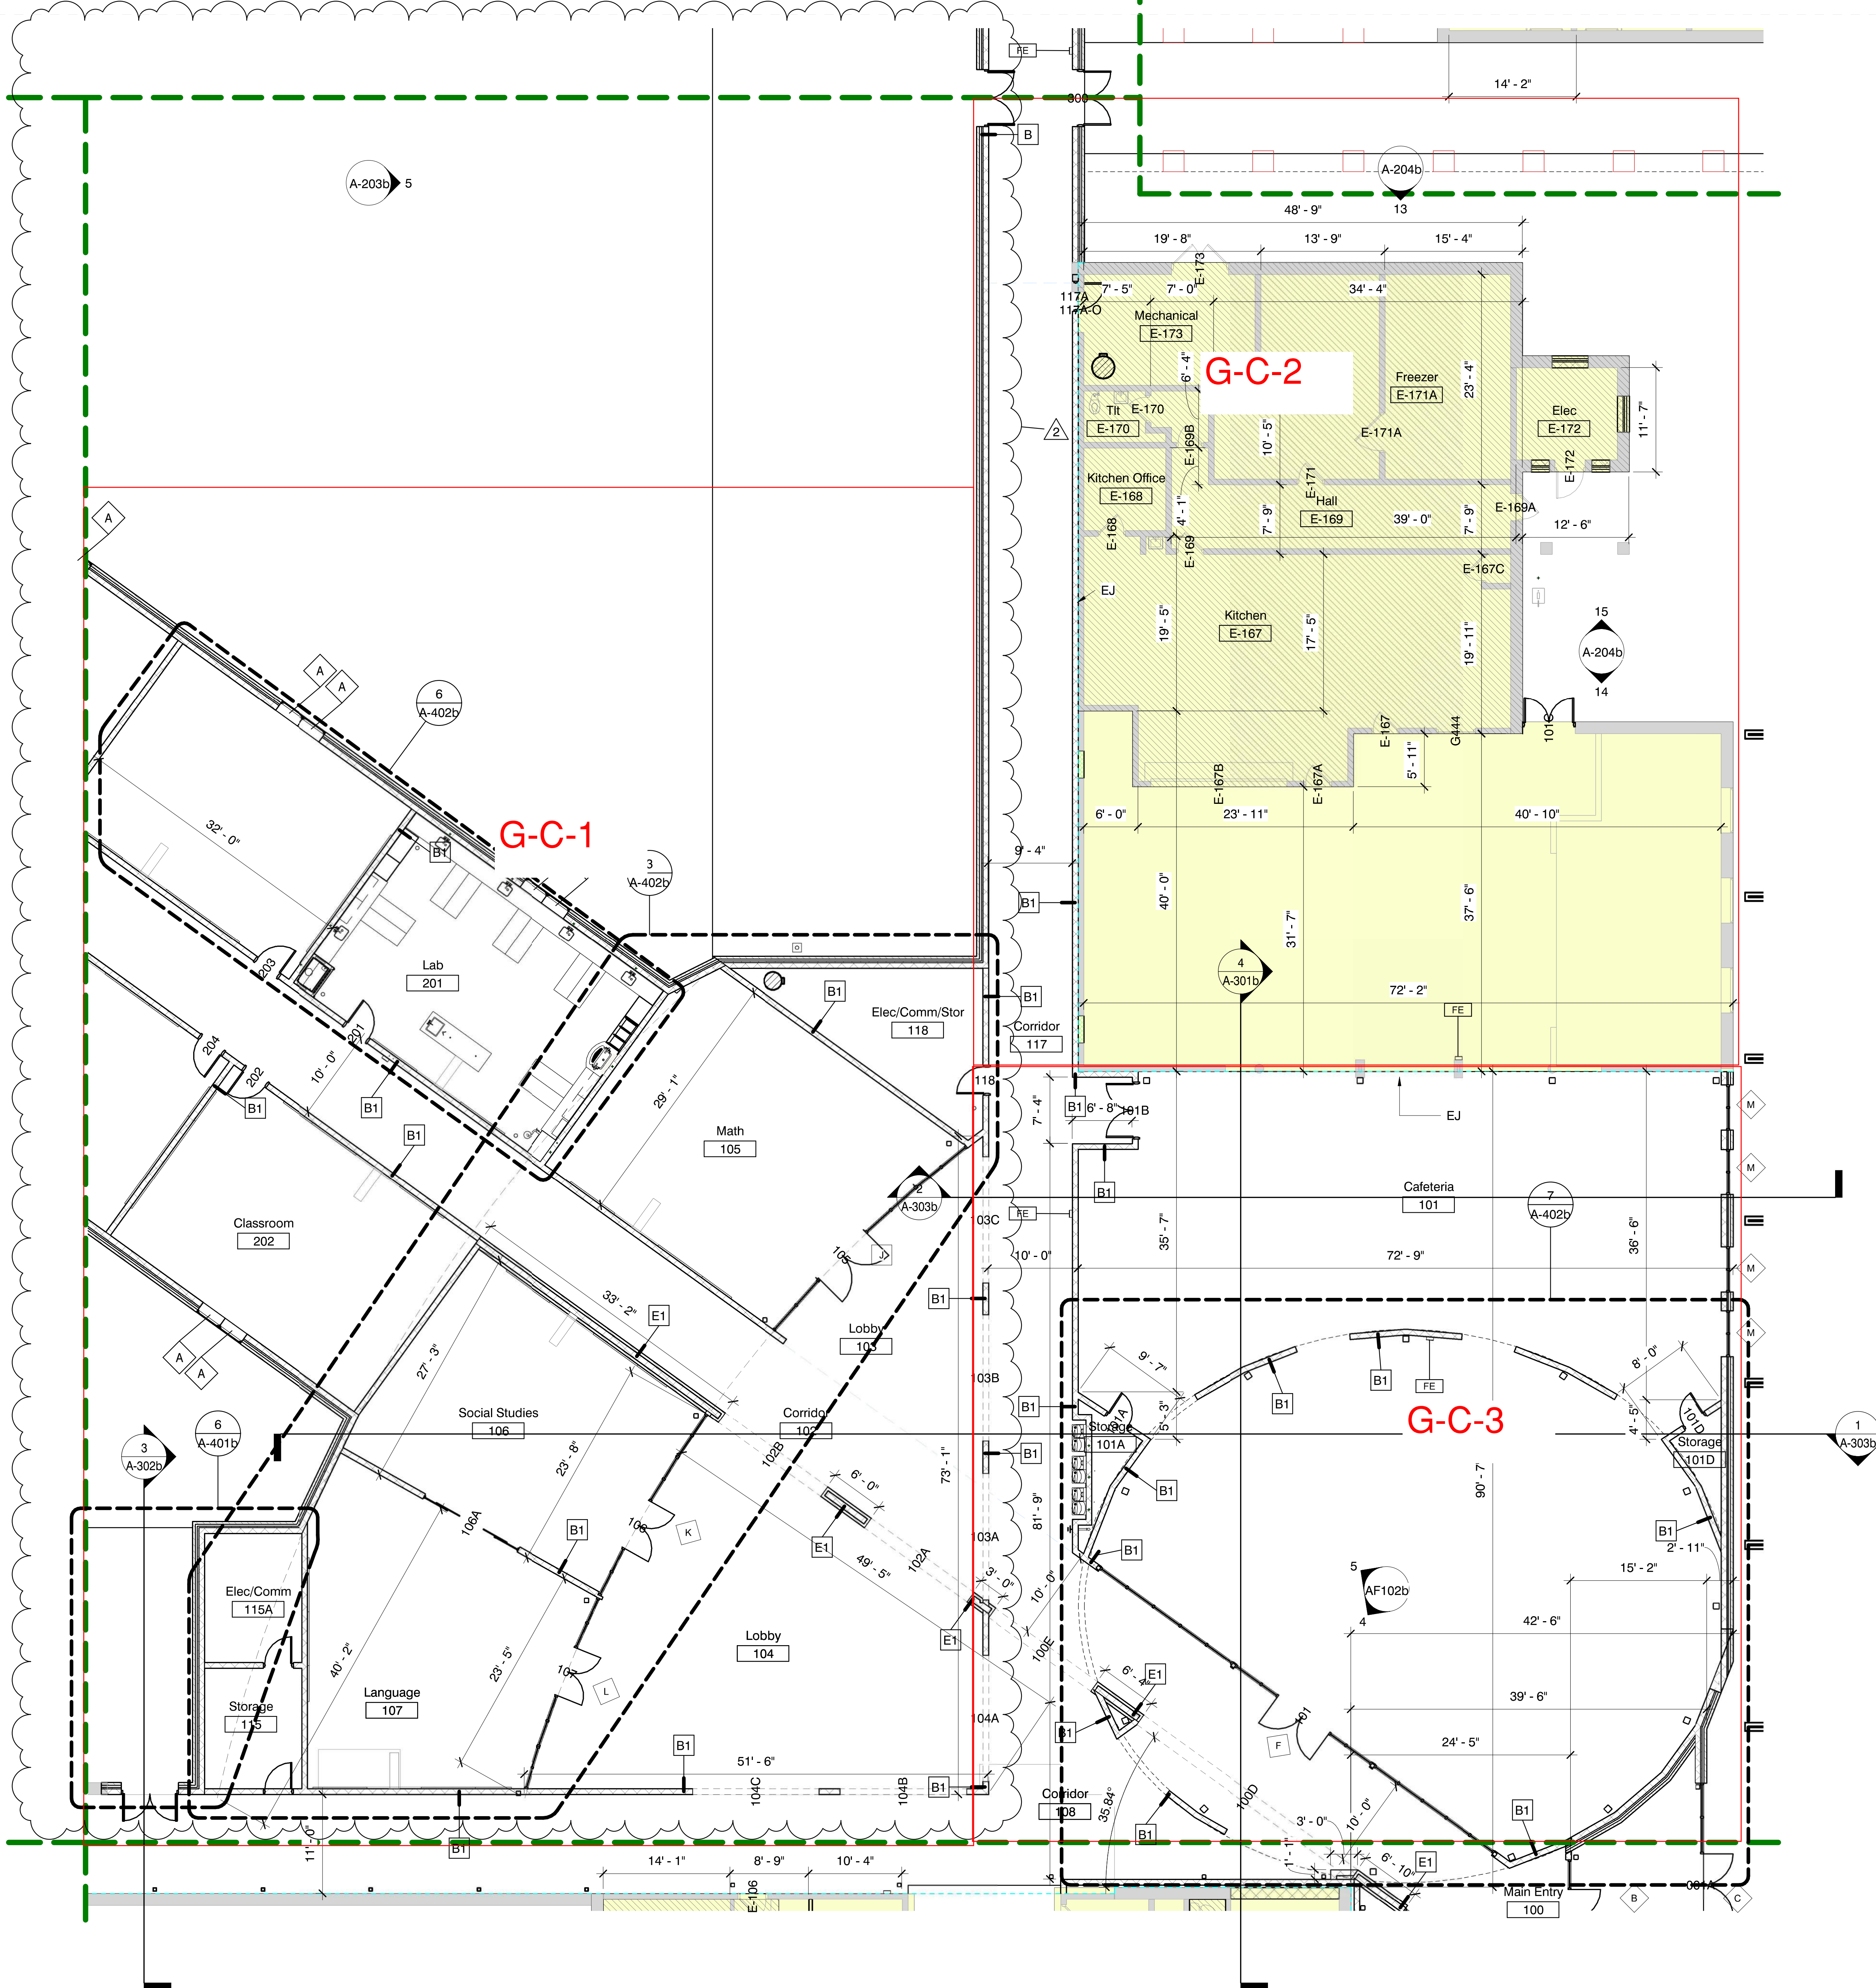

- General Plan Notes**
- All interior walls to be type "B1" UNO
  - All furniture shown in plan is NIC.
  - All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
  - Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
  - All DS tie into boot and underground water line unless otherwise noted, see Civil.
  - Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
  - All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
  - All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
  - All dimensions are to the face of masonry.
  - Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
  - Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
  - Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
  - Typ. Earth Grade Shall be 6" min. Below FFE
  - Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
  - Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
  - Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**DALE BAILEY**  
AN ASSOCIATION


Architects

One Jackson Place 250  
188 East Capitol Street  
Jackson, MS 39201  
p 601.352.5411

201 Park Court Suite B  
Ridgeland, MS 39157  
p 601.790.9432

161 Lameuse St. Suite 201  
Biloxi, MS 39530  
p 228.374.1409

dalebaileyplans.com

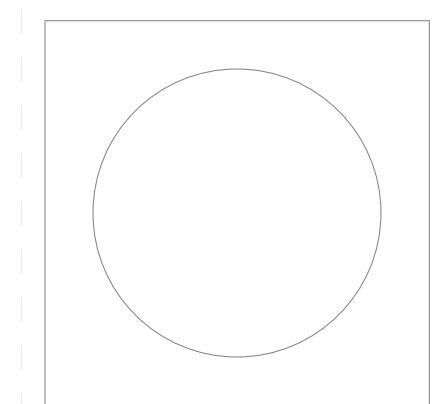


Sunflower County Consolidated School District Bond Issue  
**21081.02 Gentry High School**  
Indianola, MS




100% CD's

Project No	21081.02
Date	May 24, 2022
Revisions	Rev Date
2	08/04/22

**1 Composite Floor Plan - Part C**  
1/8" = 1'-0"

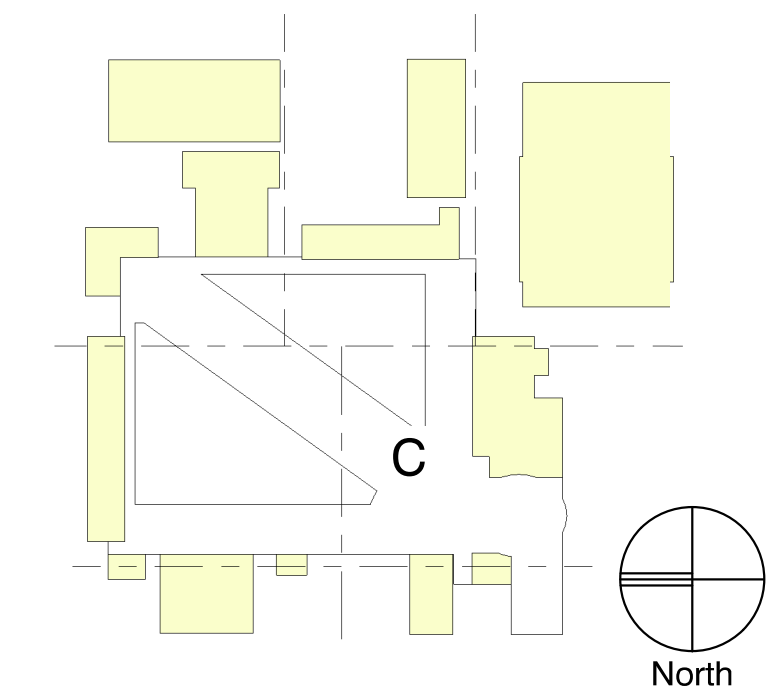

8/25/2022 11:03:00 AM  
 C:\Users\chancestokes\Documents\21081.02 Gentry High School\_ChanceStokes.rvt

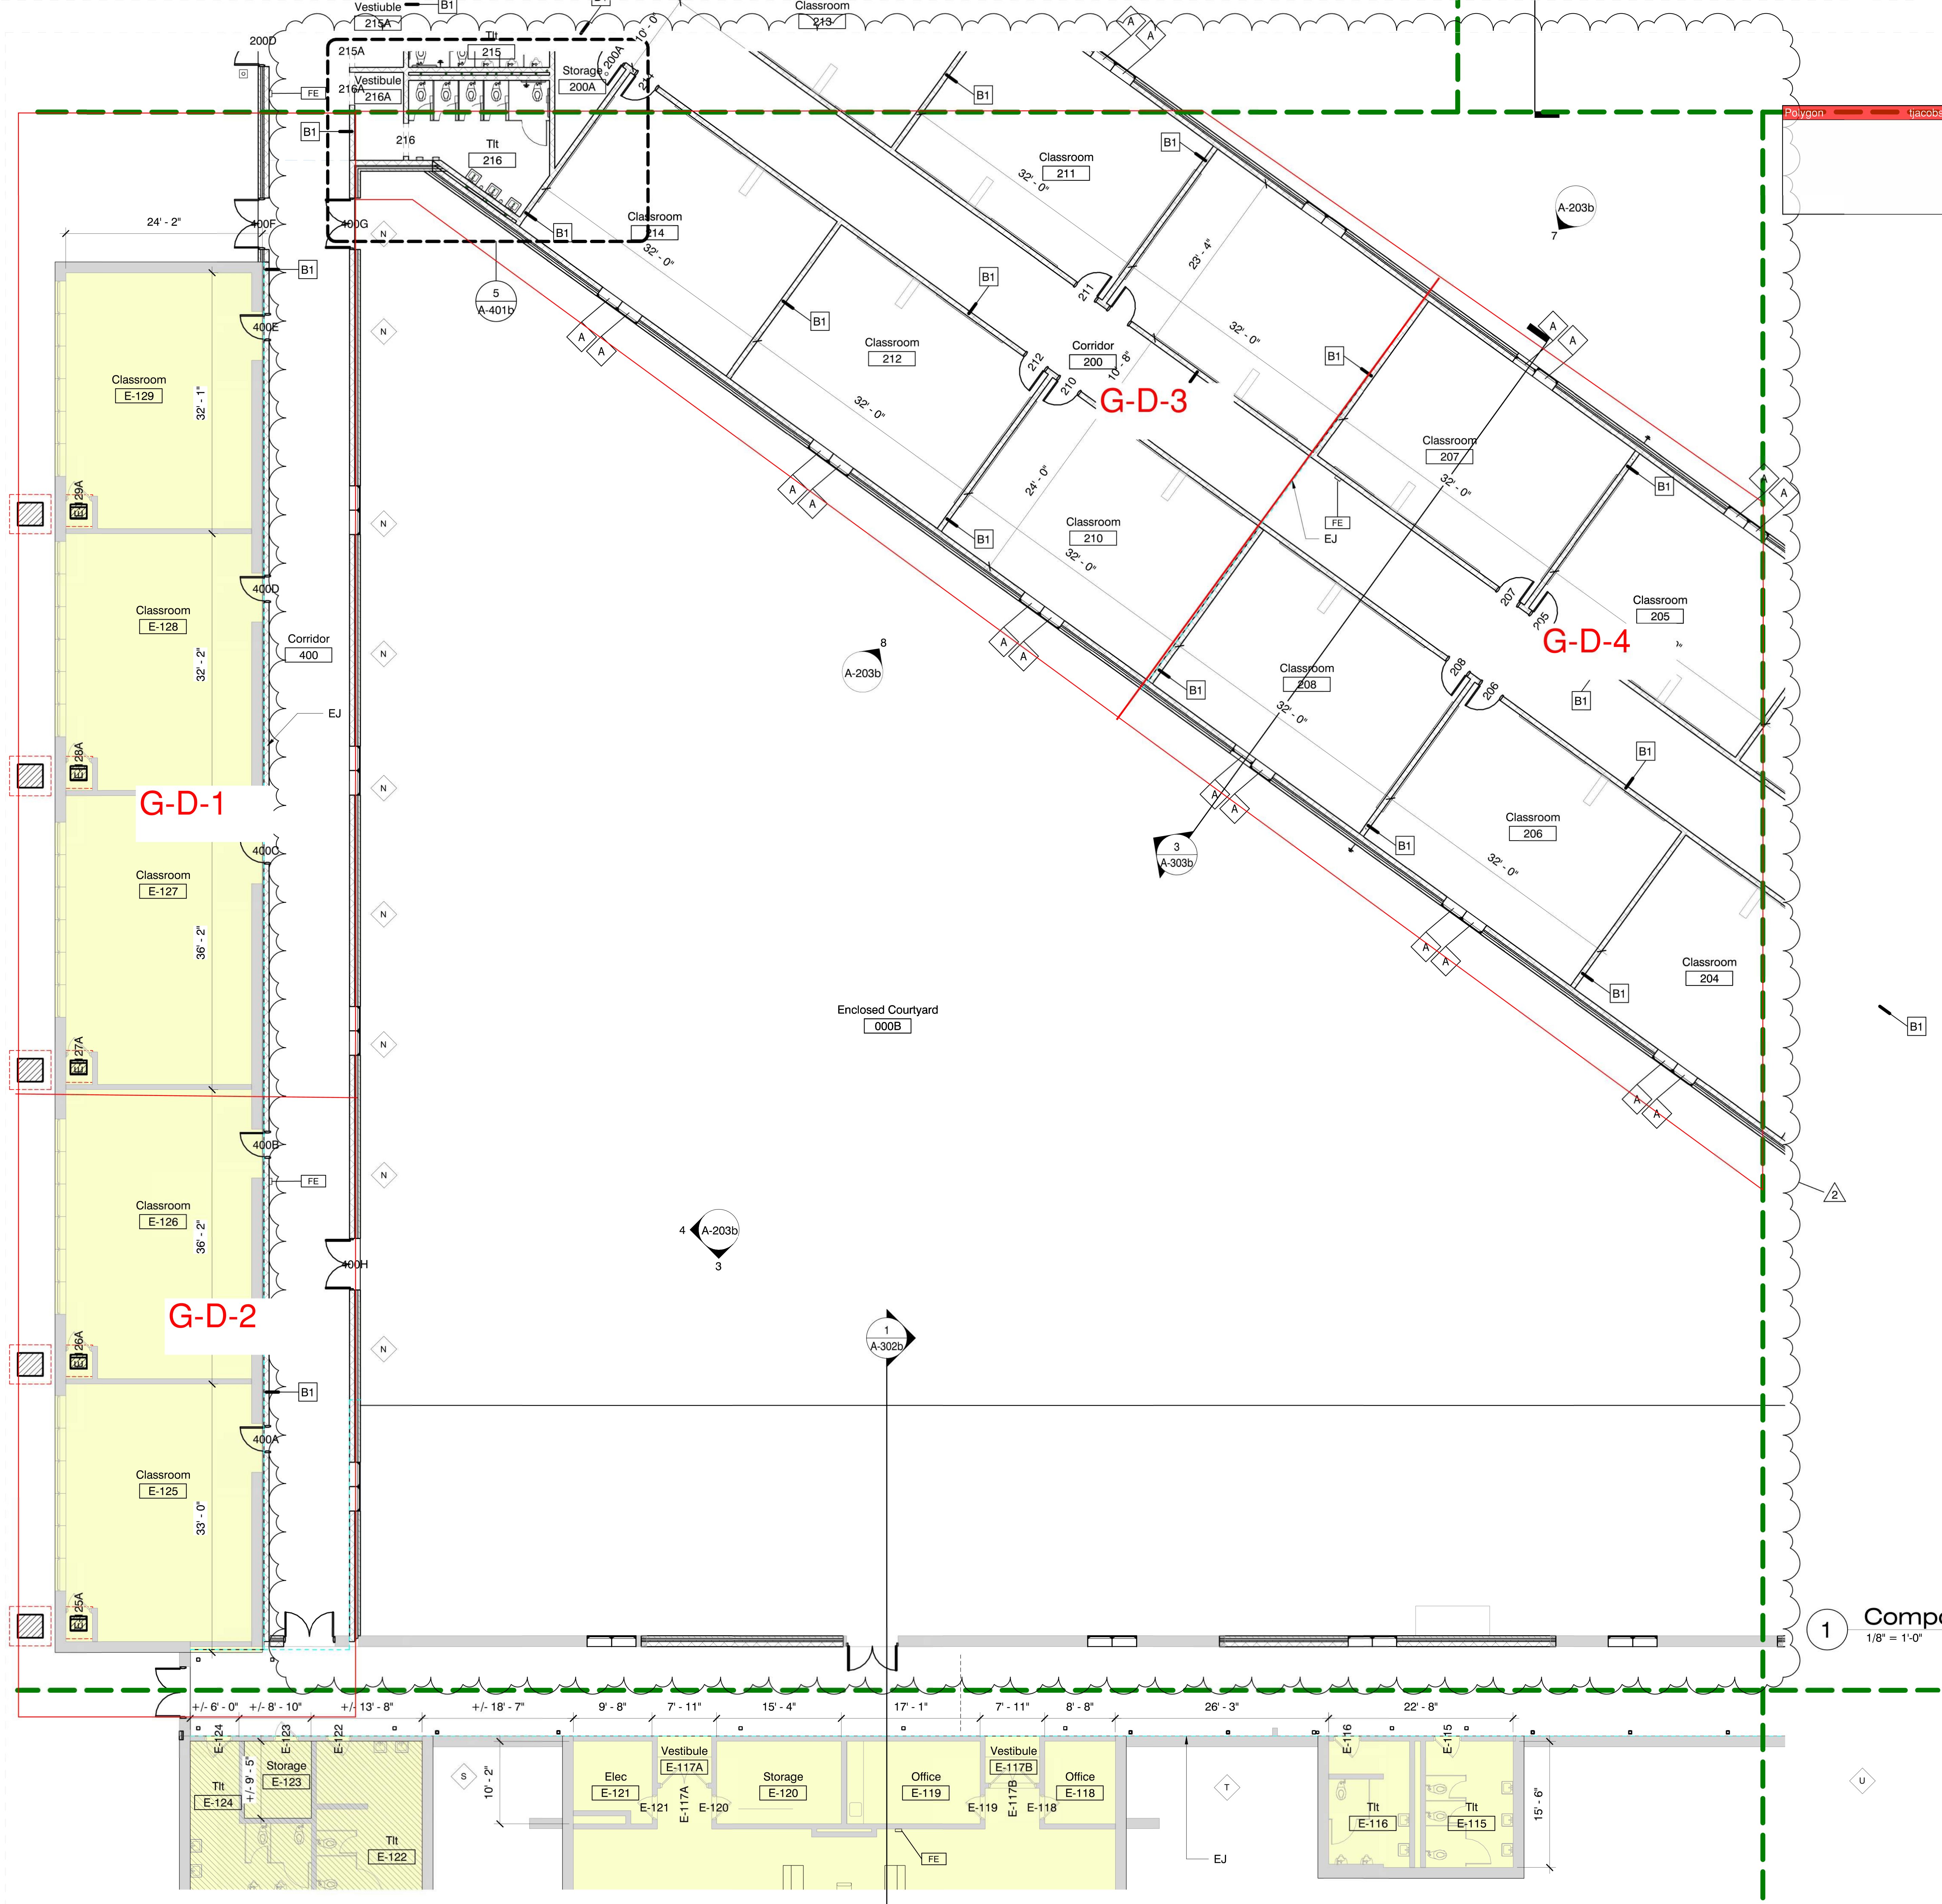

**General Plan Notes**

- All interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to the face of masonry.
- Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
- Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
- Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
- Typ. Earth Grade Shall be 6" min. Below FFE
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**DALE BAILEY**  
 AN ASSOCIATION


Architects

One Jackson Place 250  
 188 East Capitol Street  
 Jackson, MS 39201  
 p 601.352.5411

201 Park Court Suite B  
 Ridgeland, MS 39157  
 p 601.790.9432

161 Lameux St. Suite 201  
 Biloxi, MS 39530  
 p 228.374.1409

dalebaileyplans.com

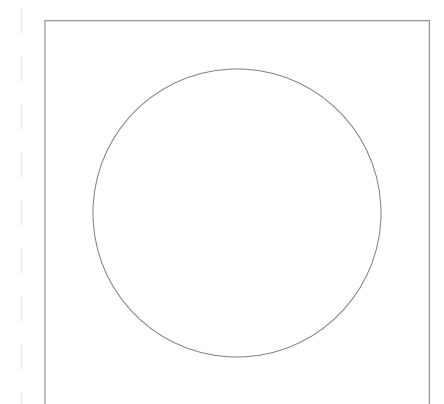


Sunflower County Consolidated School District Bond Issue  
**21081.02 Gentry High School**  
 Indianola, MS



100% CD's


Project No	21081.02
Date	May 24, 2022
Revisions	Rev Date
2	08/04/22

**1 Composite Floor Plan - Part D**  
 1/8" = 1'-0"

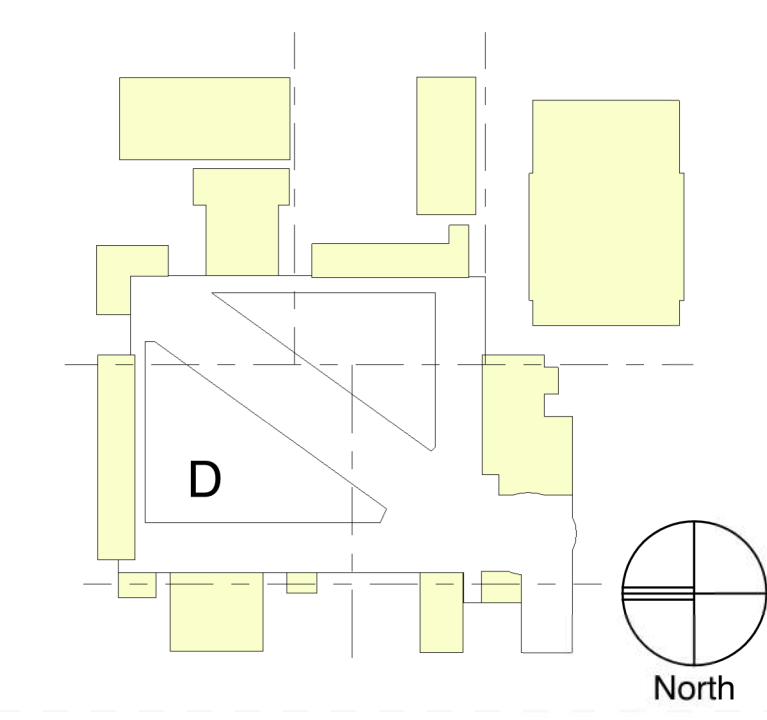







8/25/2022 11:03:20 AM  
 C:\Users\chancestokes\Documents\21081.02 Gentry High School\_ChanceStokes.rvt

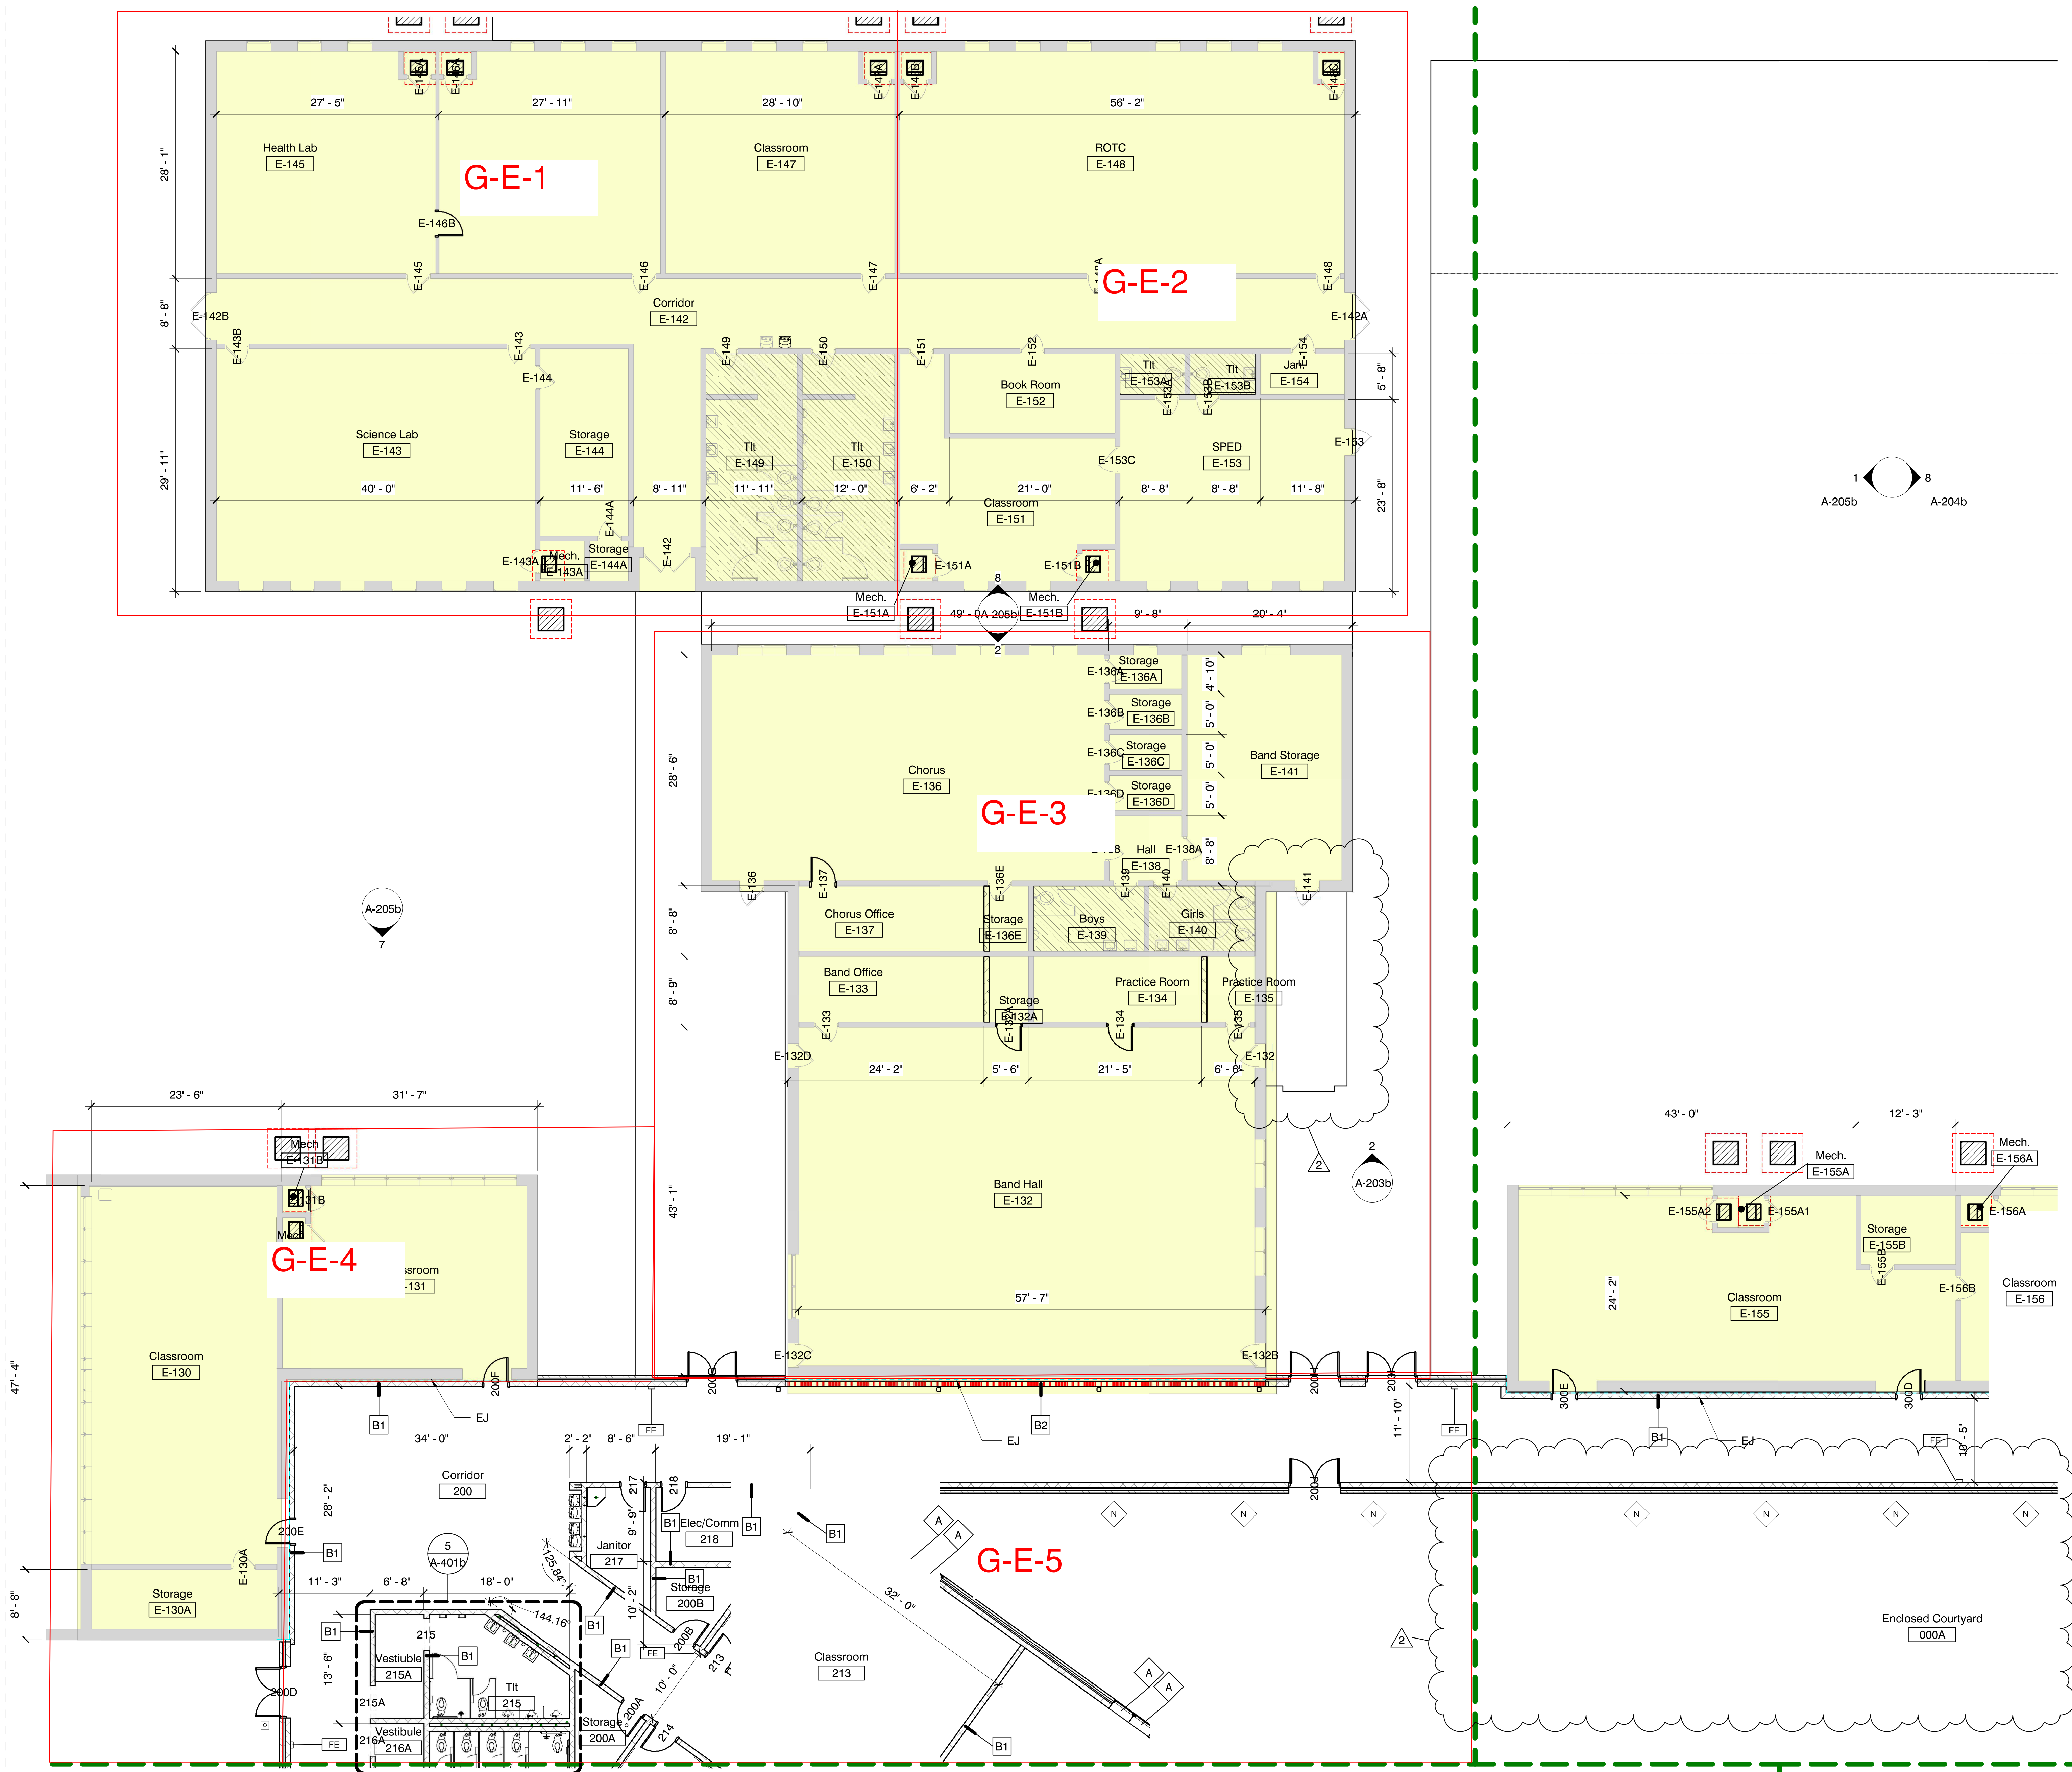

1 Composite Floor Plan - Part E  
 1/8" = 1'-0"

**General Plan Notes**

- All interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to the face of masonry.
- Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
- Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
- Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
- Typ. Earth Grade Shall be 6" min. Below FFE
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

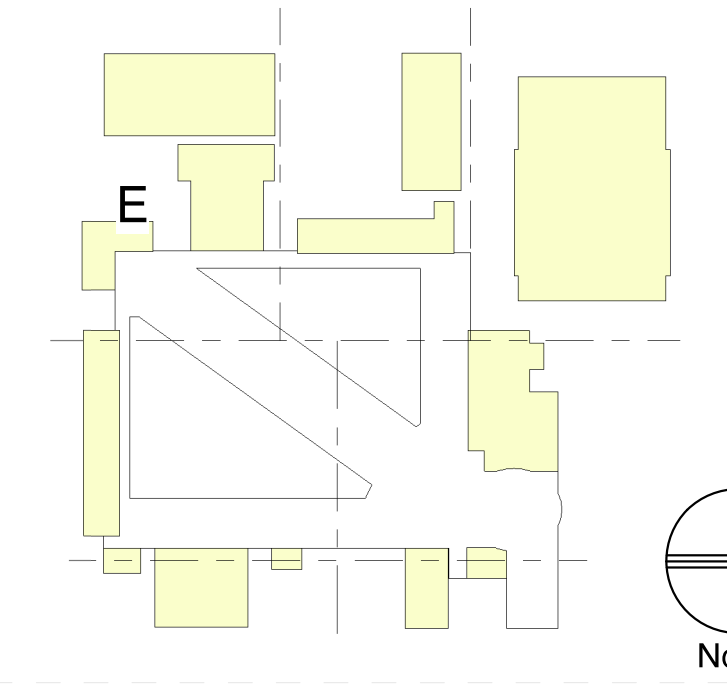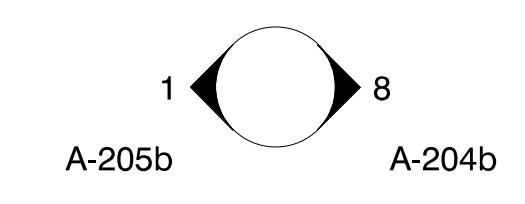

**DALE BAILEY**  
 AN ASSOCIATION


Architects

One Jackson Place 250  
 188 East Capitol Street  
 Jackson, MS 39201  
 p 601.352.5411

201 Park Court Suite B  
 Ridgeland, MS 39157  
 p 601.790.9432

161 Lameux St. Suite 201  
 Biloxi, MS 39530  
 p 228.374.1409

dalebaileyplans.com

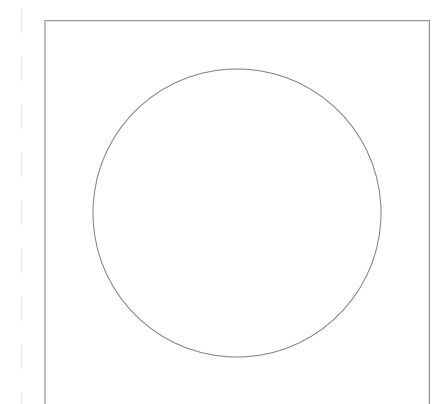


Sunflower County Consolidated School District Bond Issue  
**21081.02 Gentry High School**  
 Indianola, MS



100% CD's

Project No	21081.02
Date	May 24, 2022
Revisions	Rev Date
2	08/04/22

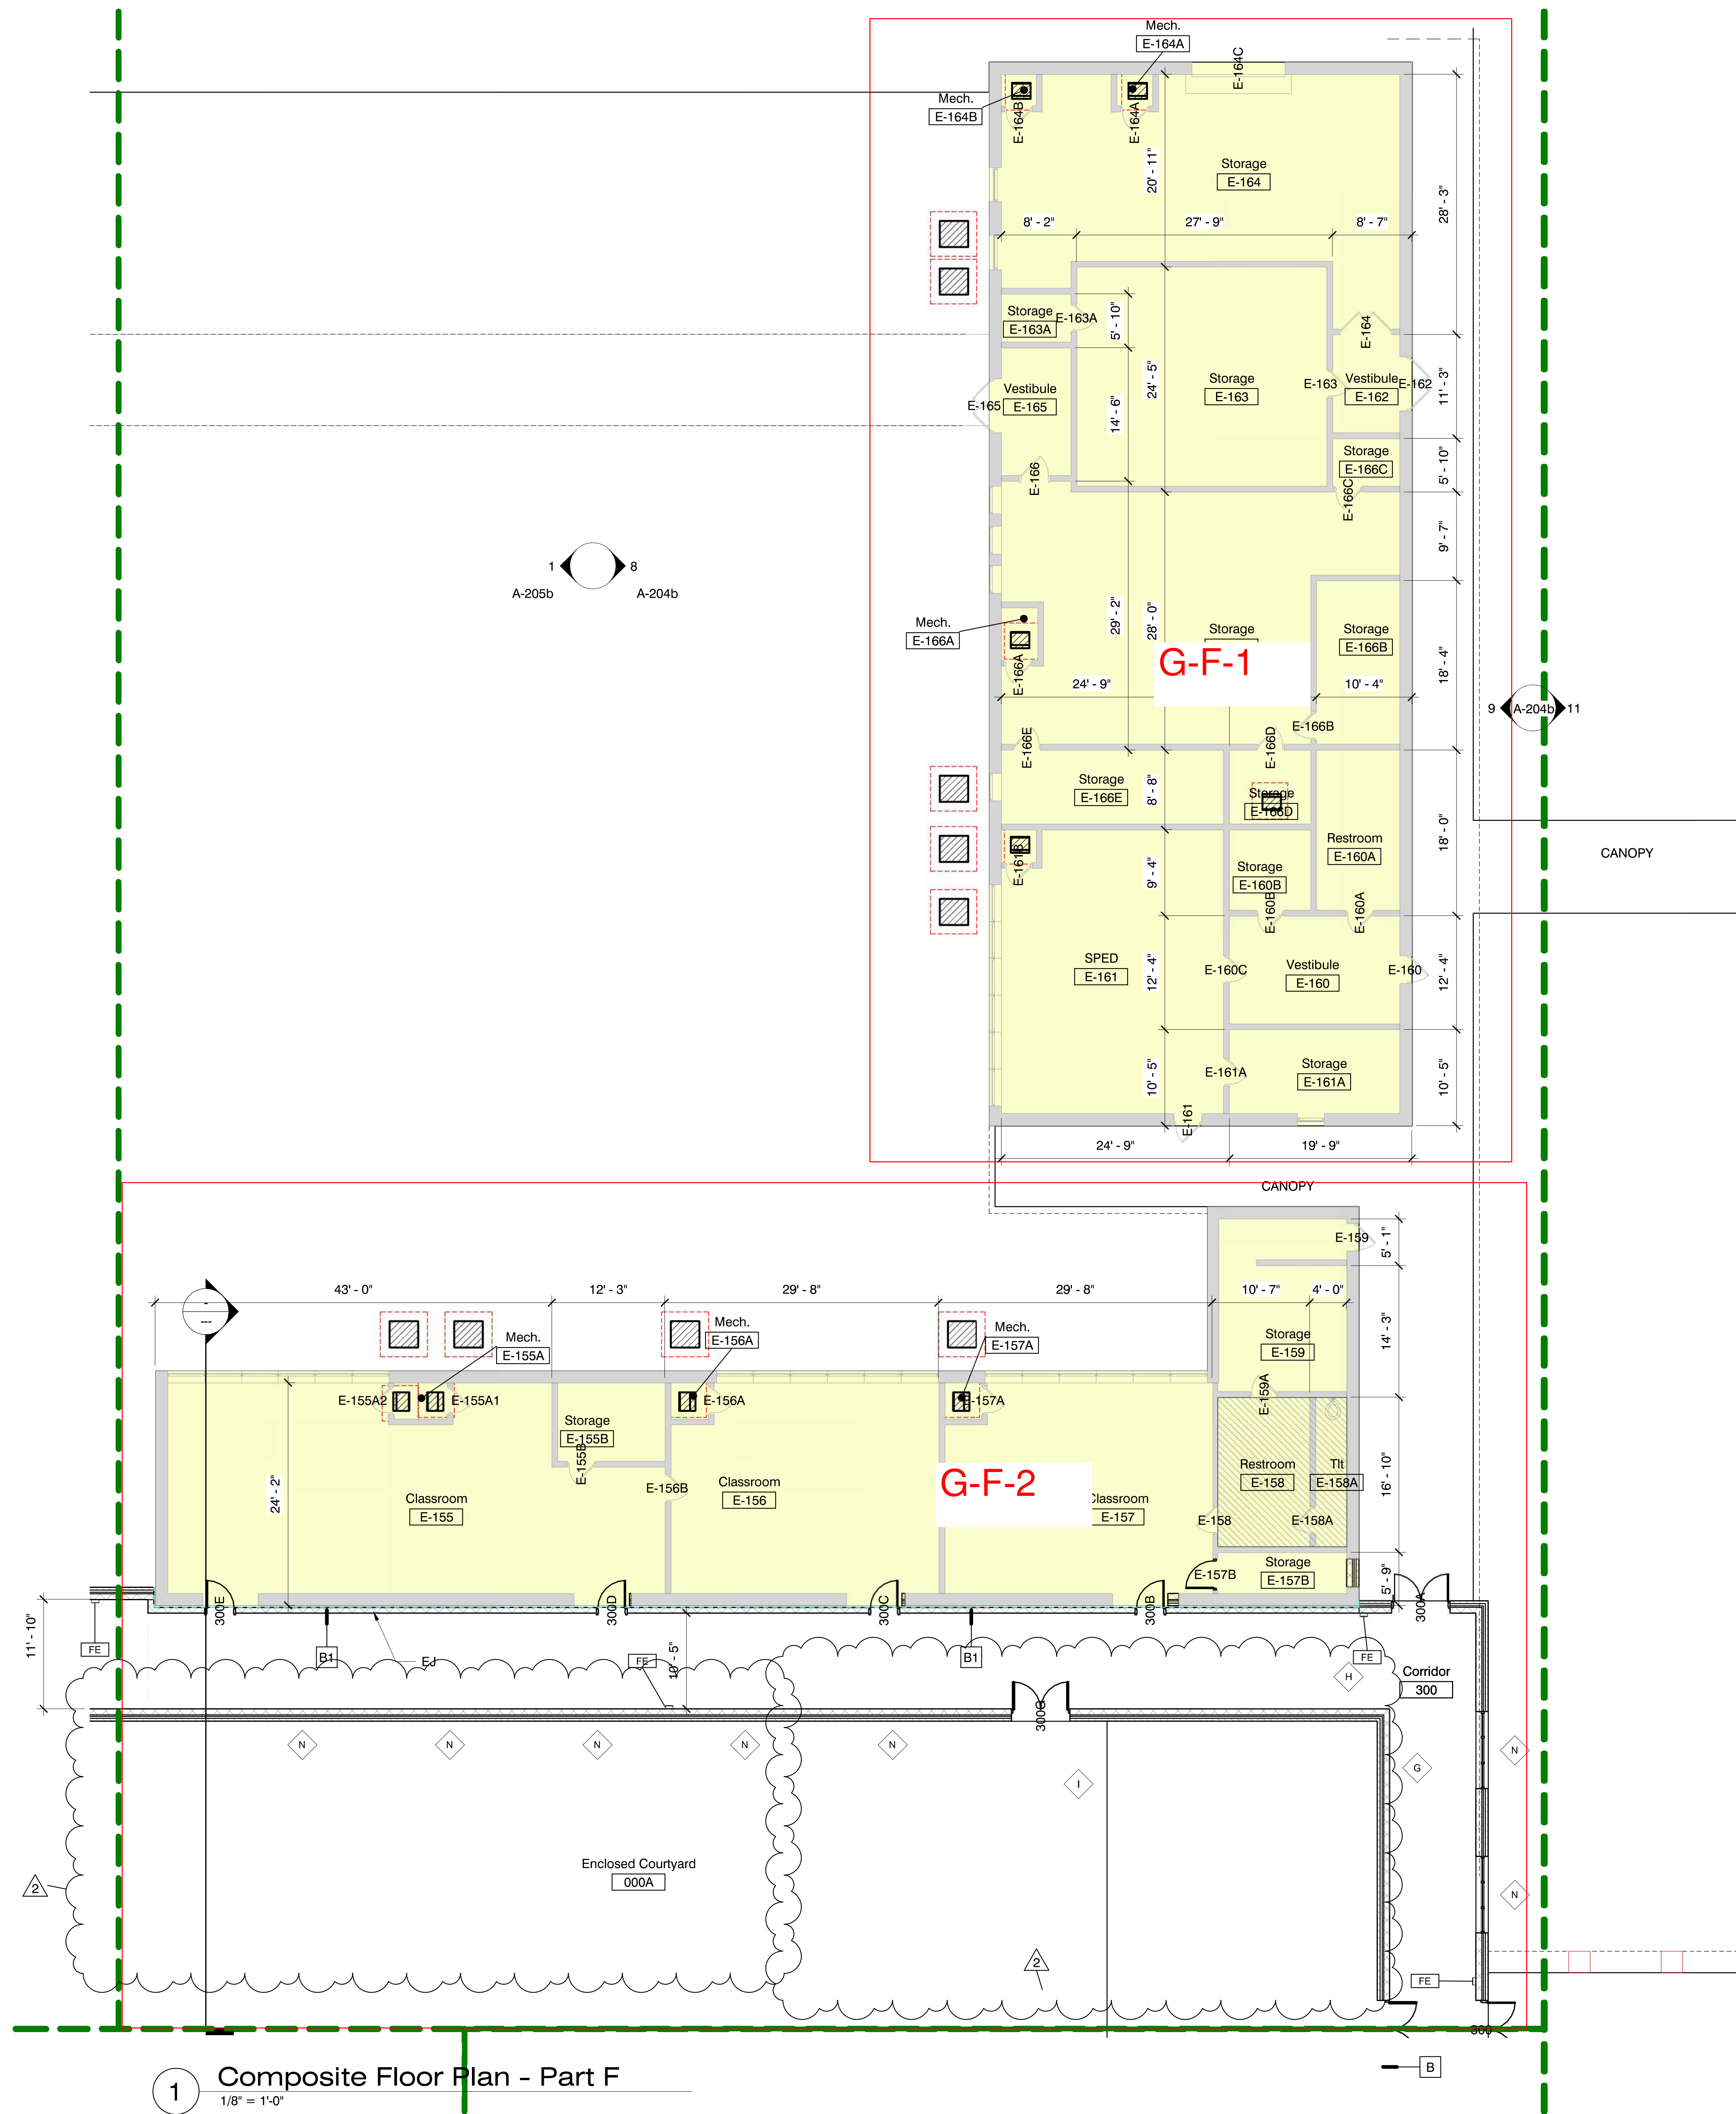

1 Composite Floor Plan - Part F  
1/8" = 1'-0"

General Plan Notes

- All interior walls to be type "B1" UNO
- All furniture shown in plan is NIC.
- All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
- Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
- All DS tie into boot and underground water line unless otherwise noted, see Civil.
- Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
- All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
- All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
- All dimensions are to the face of masonry.
- Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
- Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
- Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
- Typ. Earth Grade Shall be 6" min. Below FFE
- Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
- Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
- Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.


Architects

One Jackson Place 250  
188 East Capitol Street  
Jackson, MS 39201  
p 601.352.5411

201 Park Court Suite B  
Ridgeland, MS 39157  
p 601.790.9432


161 Lameuse St. Suite 201  
Biloxi, MS 39530  
p 228.374.1409


dalebaileyplans.com

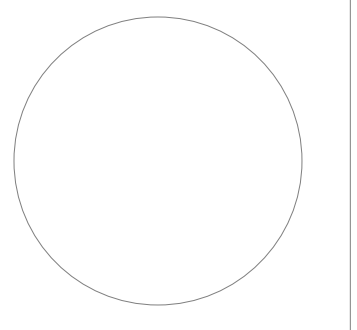

100% CD's

Project No	21081.02
Date	May 24, 2022
Revisions	Rev Date
2	08/04/22

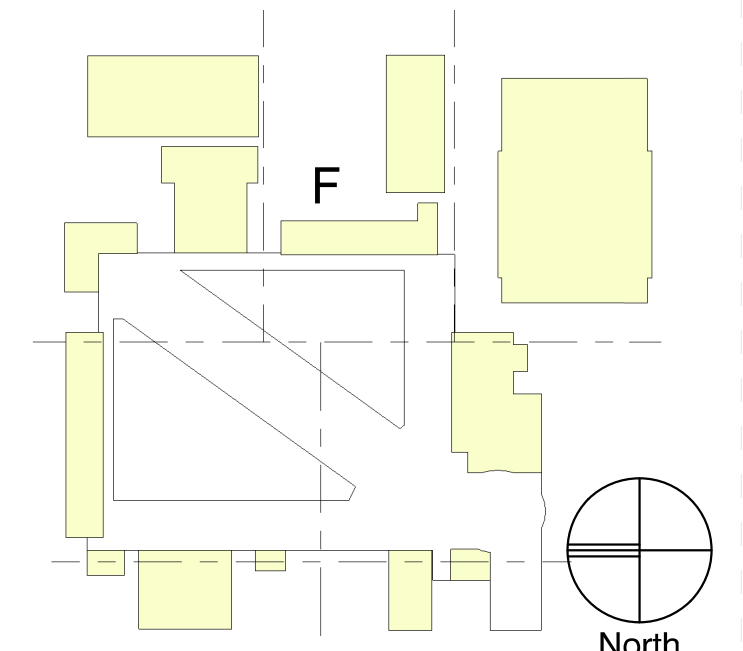

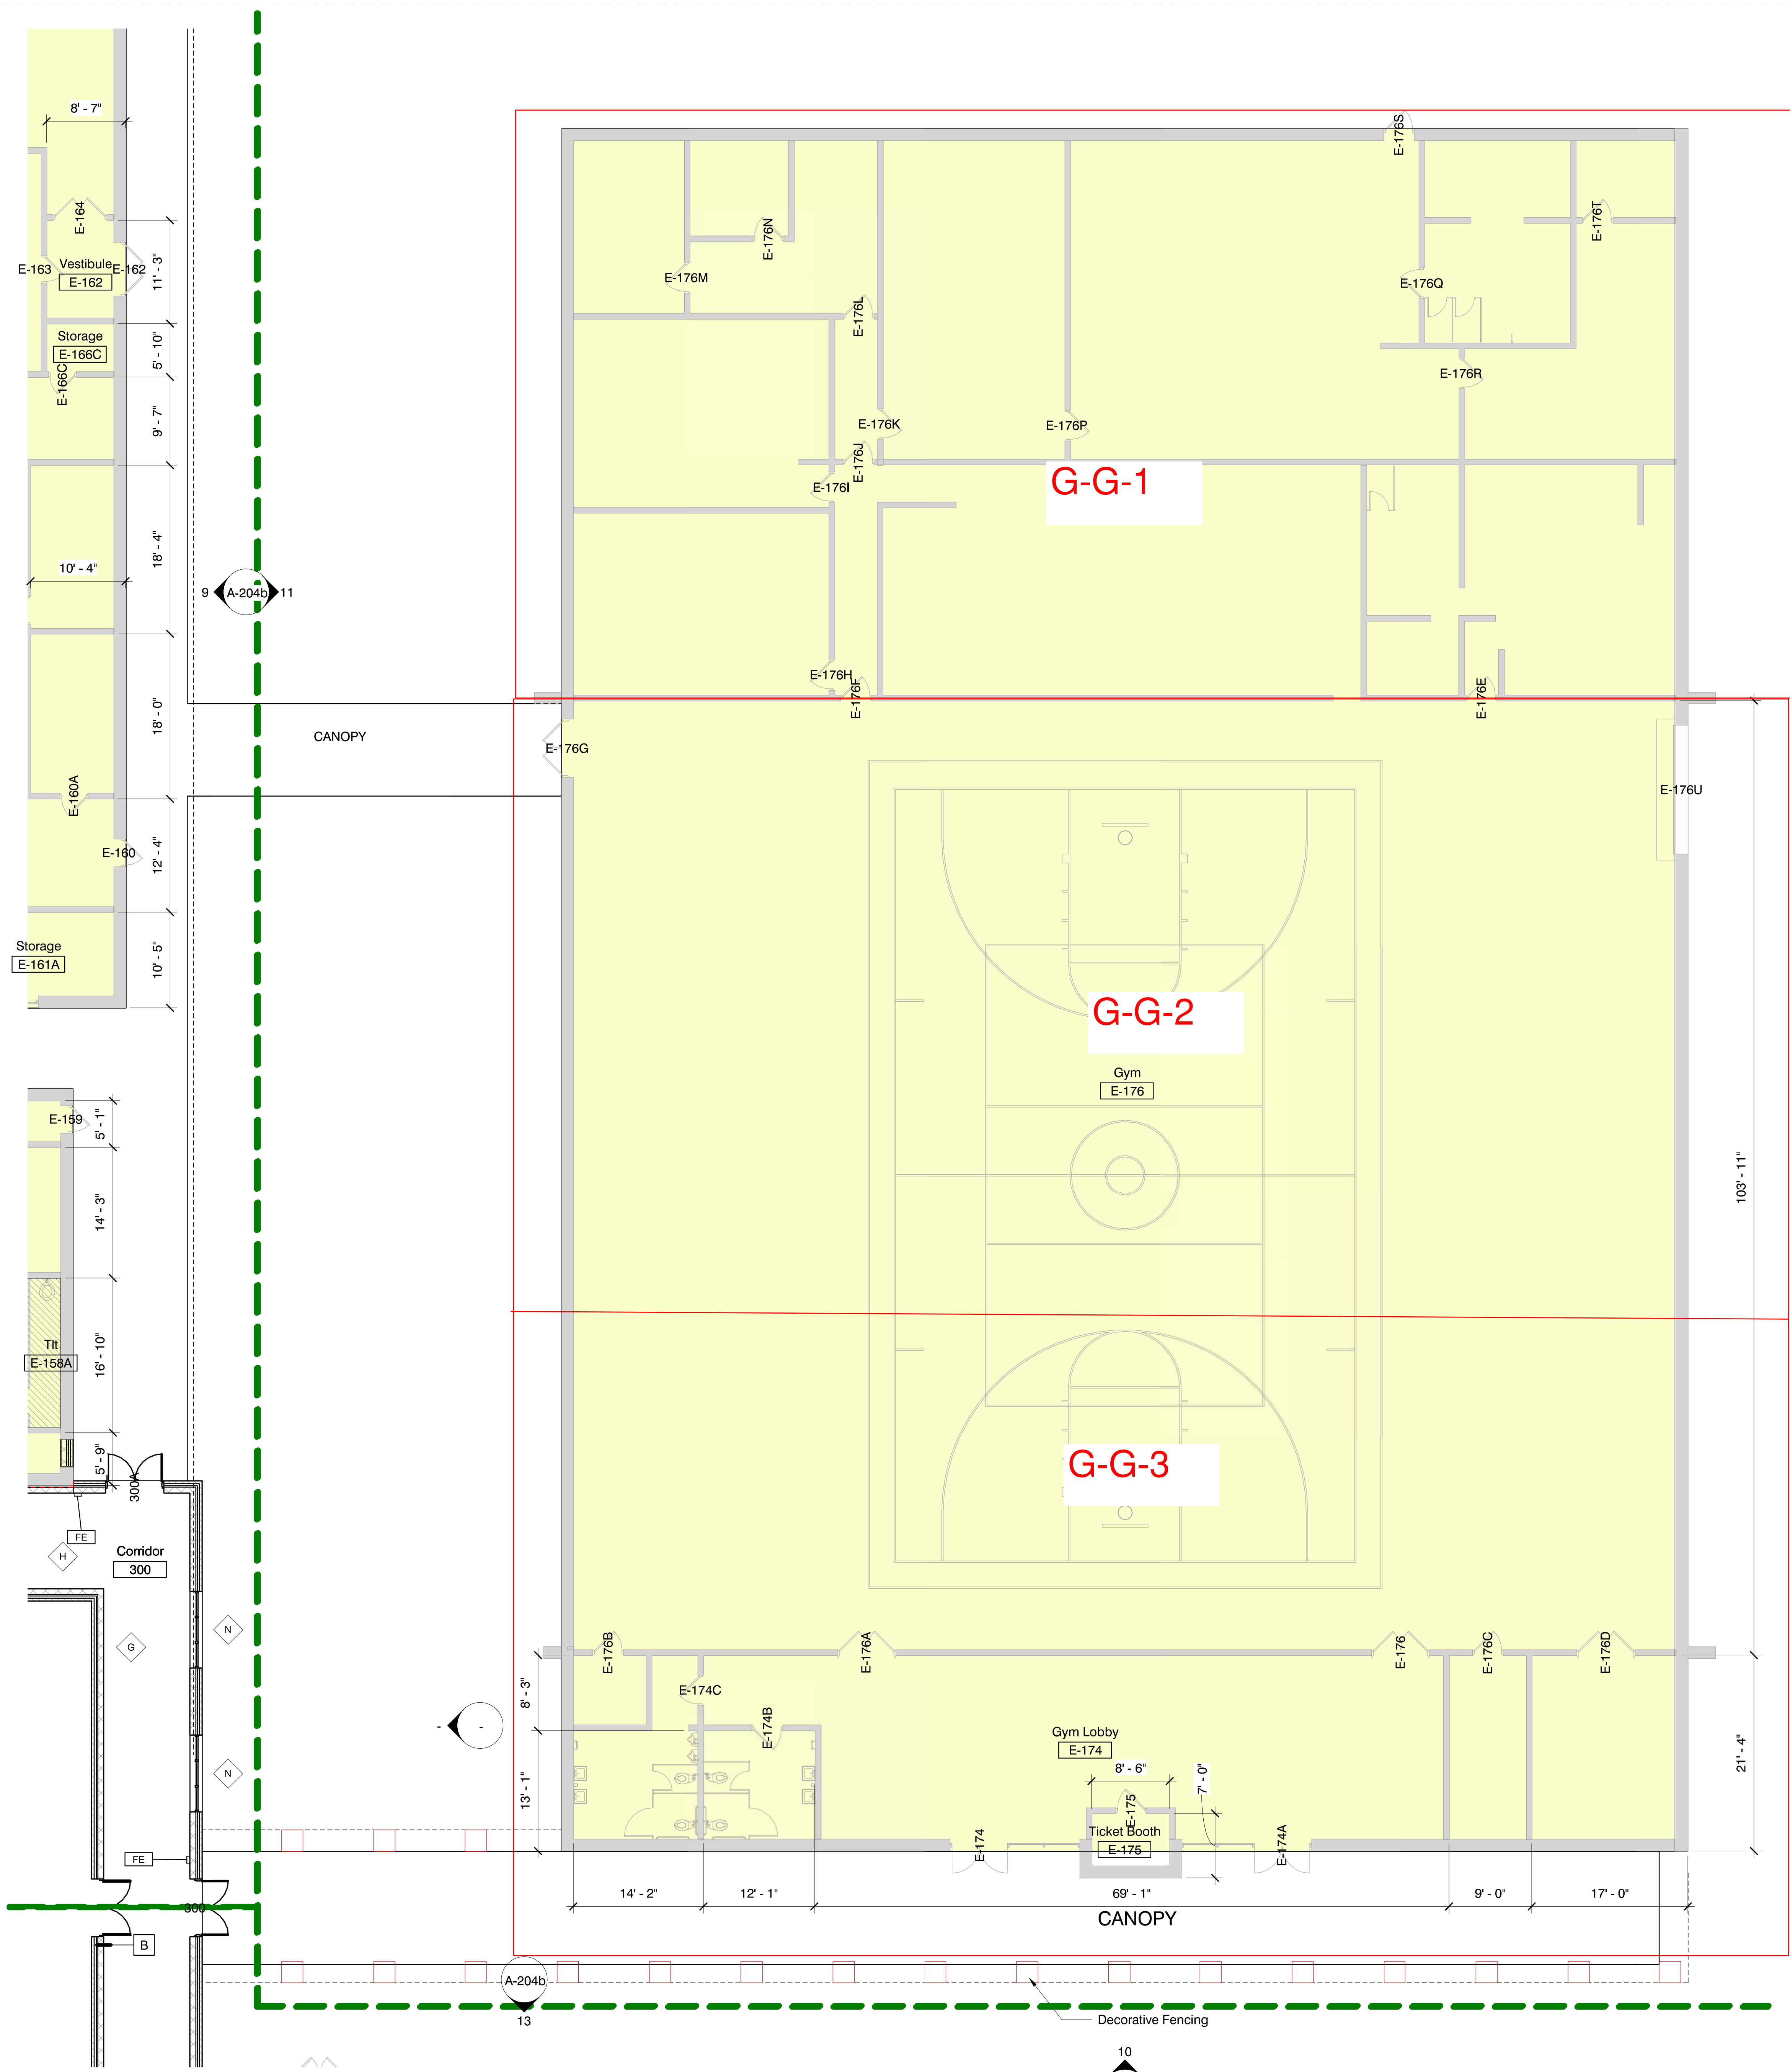

**1 Composite Floor Plan - Part G**  
 1/8" = 1'-0"

- General Plan Notes**
- All interior walls to be type "B1" UNO
  - All furniture shown in plan is NIC.
  - All door frames in masonry wall to be located 8" off perpendicular wall (typ.) unless indicated otherwise. All door frames in metal stud walls to be located 4" off perpendicular walls (typ.) unless indicated otherwise. Provide min. clear of 12" on push side of door and 18" on pull side.
  - Reference building elevations (A-200 Sheets) for exterior veneer expansion joint locations
  - All DS tie into boot and underground water line unless otherwise noted, see Civil.
  - Reference Interior Elevations for MarkerBoard, Tackboard, and Smart Board Dimensions and Locations
  - All CMU wall corners & window sills to have 1" diameter radius. Bottom course of CMU corners are not to be radiused to receive finish base as scheduled.
  - All backsides of bathroom partition doors and single unit restroom doors to have a Coat Hook (CH) installed.
  - All dimensions are to the face of masonry.
  - Exterior masonry walls will have 2" inches of continuous extruded polystyrene in the cavity between the CMU and brick veneer.
  - Typ. Grades Immediately outside of Doors entering/exiting Buildings Shall be 1/4" Below FFE, and supply a Door Threshold to traverse the difference in Elevation into the Building.
  - Typ. Grades @ Sidewalks Adjacent to Buildings and Not @ Doors shall be 1" min. Below FFE.
  - Typ. Earth Grade Shall be 3" min. Below FFE
  - Provide expansion joints and expansion joint cover plates as specified where old construction meets new and as indicated throughout all disciplines.
  - Where existing walls are to be infilled, infill with like materials with colors and finishes to match adjacent.
  - Clean existing stainless steel equipment in kitchen and cafeteria to bright and clear finish.

**DALE BAILEY**  
 AN ASSOCIATION


Architects

One Jackson Place 250  
 188 East Capitol Street  
 Jackson, MS 39201  
 p 601.352.5411

201 Park Court Suite B  
 Ridgeland, MS 39157  
 p 601.790.9432

161 Lameuse St. Suite 201  
 Biloxi, MS 39530  
 p 228.374.1409

dalebaileyplans.com

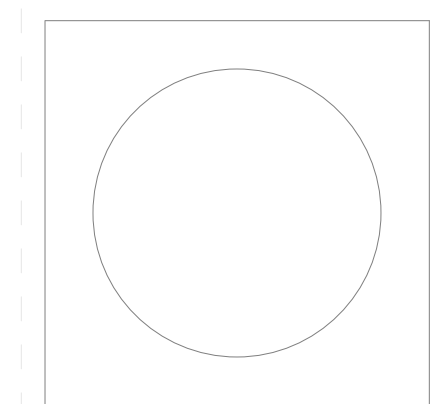

Sunflower County Consolidated School District Bond Issue  
**21081.02 Gentry High School**  
 Indianola, MS



100% CD's

Project No	21081.02
Date	May 24, 2022
Revisions	Rev Date

